

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 May 2001 (17.05.2001)

PCT

(10) International Publication Number
WO 01/35187 A2

(51) International Patent Classification⁷: **G06F**
(21) International Application Number: **PCT/US00/30879**
(22) International Filing Date:
9 November 2000 (09.11.2000)
(25) Filing Language: **English**
(26) Publication Language: **English**
(30) Priority Data:
09/436,553 9 November 1999 (09.11.1999) **US**
(71) Applicant: **MCI WORLD COM, INC.** [US/US]; 515 East
Amite Street, Jackson, MS 39201 (US).

(74) Agents: **DIGIGLIO, Frank, S. et al.**; Scully, Scott, Mur-
phy & Presser, 400 Garden City Plaza, Garden City, NY
11530 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *Without international search report and to be republished
upon receipt of that report.*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*



(72) Inventors: **WALL, Robert, S.**; 1409 Marlboro Lane,
Richardson, TX 75082 (US). **WARNER, Donald, R.**;
1006 Meadow Lane, Sachse, TX 75048 (US). **CLOSEN,**
Jackie, R.; 2421 Midnight Circle, Plano, TX 75093
(US). **DOGGETT, Patrick, J.**; 816 Thackeray Lane,
Pflugerville, TX 78660 (US).

WO 01/35187 A2

(54) Title: **STATE TRANSITION SYSTEM AND METHOD IN INTERACTIVE COMPUTER-BASED TRAINING**

(57) Abstract: An interactive computer-based training (ICBT) system operable over a computer network for training users. The ICBT system is provided with interdependent, state-machine-based hardware and software simulators for emulating hardware and software functionality associated with a piece of equipment on which the users are to receive interactive training. The state transition method effectuated in a computer-readable memory system includes the steps of: identifying a current state of the state machine wherein a transition is to be effectuated; determining if there is a state immediately prior to the current state, and if so, determining whether there is a dependency of the current state on the immediately prior state, the dependency being characterized as a first order dependency; inferring a reference value associated with the current state based on the first order dependency; and determining a future state of the state machine based on the inferred reference value.

STATE TRANSITION SYSTEM AND METHOD IN INTERACTIVE COMPUTER-BASED TRAINING

CROSS-REFERENCE TO RELATED APPLICATIONS

This application discloses subject matter related to the subject matter disclosed in the following co-assigned patent application: "Interactive Computer-Based Training System and Method," filed _____, Ser. No. _____ (Attorney Docket Number RIC-98-004), in the names of: Robert S. Wall, Don Warner, and Jackie R. Clossen.

BACKGROUND

Technical Field of the Invention

The present invention relates generally to electronic tutoring systems and methods, and more particularly, to an interactive computer-based training (ICBT) system and method operable over an Internet Protocol (IP)-based public computer network such as the Internet, a corporate Intranet, and the like.

Description of Related Art

Maintaining a skilled and innovative work force has always been important for businesses that strive to attain a competitive edge in the marketplace. Companies and organizations have come to recognize the value of intelligent and energetic people whose chief asset is their ability and desire to learn. The training opportunities presented in today's information age have increased with the advent of new technologies, creating an even broader range of tutoring services available to consumers.

The need for well-trained individuals is even more acute in technology-based businesses such as, for example, the telecommunications industry. Service providers in this industry operate and maintain vast telecommunications networks covering huge geographic areas. These networks, formed by interconnecting an immense array of diverse and often highly complex pieces of equipment, pose enormous challenges to field technicians whose responsibilities typically include installation, repair and maintenance of network equipment at network facilities and remote customer sites, and troubleshooting service calls night and day, seven-days-a-week. The service calls often involve routine as well as urgent trouble calls to make repairs that will enable the equipment, often purchased from third-party vendors, to continue functioning for the customer. Clearly, providing proper training to such field technical personnel and other technical/non-technical personnel on a broad assortment of network equipment is highly critical in order to be able to reduce the downtime associated with failed or poorly functioning equipment.

One of the conventional methods to impart appropriate technological information on an "as needed" basis to field technicians is to provide a centralized technical staff to answer questions the technicians may have concerning specific network equipment. This solution is costly. Support personnel may have to answer the same question for a number of field technicians. In addition, support personnel typically cannot provide systematic training that is needed, but rather provide "fire-fighting" type training to get a technician through a particular problem. This will not provide the technician a comprehensive understanding of the network equipment he or she is required to handle.

Another conventional method of providing instruction is by way of classroom training at a centralized location. However, this method is also highly disadvantageous. Such training is limited in classroom size and often very expensive in terms of field technicians' time and the actual monetary cost involved. Further, this problem is compounded by the fact that frequent equipment updates require continual re-training of the technicians in order for them to stay current and/or competent.

Another limitation of classroom training is that because of the disparity in proficiency levels of various technicians, training classes do not provide an appropriate level of training for every technician. Since such classes cannot be tailored to every individual's proficiency level, each technician may receive the entire training course involving complex subject matter. As a result, many technicians may feel overwhelmed while some may receive training they do not need.

Computer-based training (CBT) methods alleviate some of the deficiencies of the conventional solutions set forth hereinabove. However, the existing CBT solutions are not without drawbacks of their own. First, although courseware designed for CBT sessions is typically provided to be self-paced, flexibility in selecting different lessons or re-arranging the order of lessons plans is rather limited. For example, because the courseware is typically built around a pre-arranged set of lessons, the user cannot go from one lesson to another without first completing a previously-required lesson plan. Accordingly, such lack of flexibility renders the current CBT schemes a poor choice for effectively presenting "real-world" training with a self-paced multi-path flow. Furthermore, these solutions do not provide a scheme for evaluating the amount of training each individual end-user (e.g., a technician) needs in order to bring the individual up to a predetermined level of proficiency.

In addition, the existing CBT solutions are not optimized for providing adequate levels of instruction on complicated equipment having tightly integrated hardware and software modules and sub-modules. Those of ordinary skill in the art should readily appreciate that lack of appropriate behavioral models of the equipment with sufficient degree of realistic complexity renders the resultant CBT sessions rather insufficient for providing high quality training.

SUMMARY

Accordingly, the present invention provides an interactive computer-based training (ICBT) system operable over a computer network for training users that advantageously overcomes these and other deficiencies and shortcomings of the prior art set forth hereinabove. The ICBT system is provided with inter-dependent, state-machine-based hardware and software simulators for emulating hardware and software functionality associated with a piece of equipment on which the users are to receive interactive training. The state transition method includes the steps of: identifying a current state of the state machine wherein a transition is to be effectuated; determining if there is a state immediately prior to the current state, and if so, determining whether there is a dependency of the current state on the immediately prior state, the dependency being characterized as a first order dependency; inferring a reference value associated with the current state based on the first order dependency; and determining a future state of the state machine based on the inferred reference value.

In further detail, the ICBT system comprises a hardware simulator based on a state machine engine for emulating one or more hardware states associated with the equipment. Also included is a software simulator that is inter-dependent on the hardware simulator for accurately emulating the software functionality of the equipment. The software simulator is provided as a command inference engine that allows the users to interactively interrogate the emulated equipment for its software functionality commands. One or more independently selectable learning modules, each including one or more lesson plans related to the hardware and software functionality of the emulated piece of equipment, are also included. The learning modules are provided to be inter-dependently associated with the hardware and software simulators of the equipment. A user interface is included for selecting one or more learning modules in addition to effectuating inputs from the users to change the hardware and software configurations and simulators of the equipment.

In another aspect, the present disclosure provides an interactive CBT method for training users on equipment having hardware and software functionality. The method provides for simulating the hardware and software functionality of the equipment by employing inter-dependent state machines wherein state transitions are based on tracking prior dependencies and drawing inferences therefrom. One or more independently selectable learning modules are provided in the method, wherein each module includes lesson plans related to the hardware and software functionalities of the equipment. Inputs are provided by the users to effectuate different hardware and software configurations of the equipment. Thereafter, configuration-dependent learning modules may be selected based on the different hardware and software configurations.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention may be had by reference to the following Detailed Description when taken in conjunction with the accompanying drawings wherein:

FIG. 1 (Prior Art) depicts a flow diagram of an exemplary conventional CBT method;

FIG. 2 depicts a functional block diagram of a presently preferred exemplary embodiment of an on-line interactive CBT (ICBT) system provided in accordance with the teachings of the present invention;

FIG. 3 is a functional block diagram illustrating the inter-dependent modular architecture of the ICBT system of the present invention;

FIG. 4 depicts a presently preferred exemplary embodiment of the inter-dependent modular ICBT system;

FIG. 5 depicts a state transition scheme used in implementing a simulator engine for emulating hardware and software components of a device for which an ICBT system is provided in accordance with the teachings of the present invention;

FIG. 6 is a flow diagram of the state transition scheme of the present invention;

FIG. 7 illustrates a presently preferred exemplary embodiment of a state transition diagram for use with an ICBT system implemented for a router device;

FIG. 8 is a flow diagram of a test-taking process provided in the ICBT system of the present invention;

FIG. 9 depicts a flow diagram of an ICBT session using an adaptive-learning troubleshooting module provided in accordance with the teachings of the present invention;

FIGS. 10A through 10N are exemplary screen shots of a presently preferred ICBT system implemented for a router; and

FIG. 11 is an exemplary screen shot of a presently preferred ICBT system implemented for a switch.

DETAILED DESCRIPTION OF THE DRAWINGS

In the drawings, like or similar elements are designated with identical reference numerals throughout the several views, and the various elements depicted are not necessarily drawn to scale. Referring now to FIG. 1, depicted therein is a simplified flow diagram of an exemplary conventional CBT method for presenting selected courseware to an end-user. The conventional CBT method is generally provided as a series of discrete lesson plans with a pre-defined order, i.e., a beginning, middle and an end. In actual operation, such a method typically displays a series of user interface screens for sequentially presenting the lesson plans to the end-user, for example, a field dispatch technician or an employee/trainee at a facility. The entire courseware

may comprise a predetermined number of lessons or lesson plans, and the end-user cannot typically change the order of the lessons being presented. Accordingly, upon starting or accessing the CBT courseware (step 102), the end-user goes through taking the lesson plans in the order they are presented (steps 104 through 108), until a determination is made as to whether the end-user wants to continue with any additional lessons (decision block 110). If so, the additional lesson plan or plans may then be presented (step 112) for the end-user's benefit. On the other hand, should the end-user decide to quit the CBT session, option to deactivate and/or finish the session is generally available (step 114).

It should be readily appreciated by those of ordinary skill in the art that while a uni-linear CBT method such as one set forth in the foregoing is relatively easy to design, implement and use, and may overcome the drawbacks of a classroom-based training scheme, there still exist several deficiencies and disadvantages in the conventional CBT methods as set forth in the Background section of the present patent application.

FIG. 2 depicts a functional block diagram of a presently preferred exemplary embodiment of an on-line interactive CBT (ICBT) or Web-based training (WBT) system 200 provided in accordance with the teachings of the present invention. Preferably, the courseware of the ICBT system 200 is provided as part of a server-based multimedia application package 206 running on one or more servers, for example, server 204, that are connected to a computer network 202 such as the Internet, Intranet, et cetera. A client computer 208 (e.g., a laptop computer and the like) may preferably be used for accessing the courseware on an "as-needed" basis upon effectuating suitable authentication and log-on procedures. A graphic user interface 210 provided with the client computer 208 aids the end-user for interacting with the courseware 206. Preferably, the end-user, who may be a field technician working at a remote site, can access the courseware on-line and obtain interactive tutoring or training on a piece of equipment that the end-user is dispatched to install, repair, maintain, or troubleshoot a service call at the remote site.

In accordance with the teachings of the present invention, the courseware of the ICBT system is provided with an inter-dependent modular architecture for facilitating maximum user flexibility. As will be described in greater detail hereinbelow, both hardware and software functionality of the equipment for which the courseware is designed are modeled as inter-dependent state machines that allow transitions via multiple paths based on state dependency and reference value inferences. Furthermore, the courseware is preferably provided as an inter-dependent collection of various hardware and software lesson plans, test/quiz sessions, troubleshooting menus, on-line help modules, and multimedia presentations (e.g., video clips, photographs, et cetera), wherein the end-user is capable of selecting any lesson plan at will or executing only a portion of a training session at any point in the courseware depending upon the need.

FIG. 3 is a functional block diagram illustrating the inter-dependent modular architecture 300 of an exemplary ICBT system. A hardware simulator 302 is provided for emulating the hardware functionality of a component or device. A state machine engine forms the basis for the hardware simulator 302 wherein the sub-components of the device are characterized and the states in which the device may exist, based upon the conditions of the sub-components, are defined. For example, various connectors, switches, cables, input/output (I/O) port configurations, power-on conditions, et cetera, of a device are abstracted and assigned logic values based on their states or conditions such as ON, OFF, specific values, connections made or not made, et cetera.

A software simulator 304 is provided for emulating the software functionality, or a subset thereof, of the device. A suitable inter-dependent state machine engine also forms the basis for the device software simulator 304. The various states of the hardware and software state machine engines are provided to be inter-dependent and, accordingly, affect the respective state transitions appropriately in order to emulate the device functionality substantially accurately and completely.

One or more learning modules 306 are provided as part of the ICBT system, preferably including a plurality of self-contained multimedia lesson plans, on-line help screens, troubleshooting modules, test/quiz portions, appropriate technology background information, glossaries, et cetera. Preferably, the components of the learning modules are organized in reference to the various hardware and software portions of the abstracted device and are appropriately associated with the hardware and software simulators of the ICBT system.

A graphic user interface 210 facilitates the end-user to access and interact with the various modules of the ICBT system. Using the interface 210, the end-user can manipulate the various abstracted sub-components of the hardware simulator 302 as part of a lesson plan. For example, the end-user may turn on or off various switches, make connections, turn on power to the device, et cetera, by effectuating an appropriate pointing device (e.g., a mouse) on the icons of the interface 210. Also, various software commands for the device may be entered through a software command interface portion of the user interface 210. Further, the user interface 210 preferably comprises appropriate display windows or dialog boxes to help the end-user navigate through the various multimedia teaching/training aids, testing and evaluation modules, etc.

Referring now to FIG. 4, depicted therein is a presently preferred exemplary embodiment of the inter-dependent modular architecture 400 of an ICBT system provided in accordance with the teachings of the present invention. From a starting stage 402, the end-user can independently interact with a tutorial or lesson plan module 404, a hardware simulator 406, a software simulator 408, a reference module 410, or a troubleshooting module 412. As described in the foregoing, the hardware and software simulators of the modular architecture 400 are underpinned

by their respective state machine engines. The hardware simulator 406 is associated with its lesson module 420 and the state machine engine 418. Similarly, the software simulator 408 is also associated with its lesson module 416 and a command inference engine 414 provided as the software state machine. The reference module 410 is also provided to be independently accessible to the end-user and is preferably coupled to the troubleshooting module 412.

In accordance with the teachings of the present invention, a problem identification module 422 preferably maintains a personal profile for the end-user and provides a list of most common causes of a particular error or problem encountered. For example, the list may include "Top 10" causes for the end-user with respect to a specific problem, thereby narrowing and personalizing the problem identification process. It should be appreciated by those of ordinary skill in the art that the personalized problem identification process provided herein substantially expedites the troubleshooting tasks and, accordingly, reduces equipment downtime in the field.

FIG. 5 depicts a state transition scheme 500 used in implementing a simulator engine for emulating hardware and software components of a device. In accordance with the teachings of the present invention, state transitions are provided to be inter-dependent upon previous states and the conditions thereat. Further, such inter-dependency may extend beyond the states that are immediately prior to a current state. In other words, state transitions are preferably based upon tracking the dependencies not only with respect to the immediately prior states, but also their previous dependencies as well. In addition, the dependencies may be direct or indirect, based upon whether a logic condition associated with a state is alterable regardless of a previous state's condition, although a specific value of the previous state's condition may be necessary for a more realistic simulation. It should be readily appreciated by those of ordinary skill in the art upon reference hereto that such a "multi-level" inter-dependency scheme in a state machine provides for a robust and fine-grained behavioral model of the device being emulated.

Continuing to refer to FIG. 5, a current state 502 is shown to have dependencies on a plurality of states that are immediately prior to it, for example, state 504-1 through state 504-L. These dependencies may be referred to as the first-order dependencies with respect to the current state 502. Also, the immediately prior states may likewise be denoted as the first-order states. As exemplified in this FIG., the first-order dependencies may comprise both direct (e.g., dependency path 508) and indirect (e.g., dependency path 510) dependencies. Also, the first-order previous state 504-1 is, in turn, exemplified with a direct dependency path 522 (a second-order direct dependency with respect to the current state 502) as well as an indirect dependency path 524 (a second-order indirect dependency for the current state 502).

The current state 502 may transition into any of the first-order next states, for example, state 514-1 through state 514-K, based upon tracking the dependencies as set forth above. Also, the logic conditions of a next state may give rise to a direct as well as an indirect dependency

path to another, second-order, next state. For example, the first-order next state 514-2 generates a direct dependency path 518 to a second-order next state 516-1 and an indirect dependency path 520 to another second-order next state 516-2.

Preferably, an Artificial Intelligence (AI)-based inference engine is used for keeping track of the state logics, dependencies and allowable transitions in the state machines of the present invention. FIG. 6 depicts a flow diagram of the state transition scheme 500 described hereinabove. After identifying or ascertaining the present state (step 602), the inference engine determines its dependent state or states and characterizes the dependencies thereof (step 604). Thereafter, one or more reference values associated with the state (or its logic parameters) are inferred (step 606). Typically, the reference values may comprise a set: {NULL; 0; or a specific value}. The values of the references may then be used, in one exemplary embodiment, for determining state transitions (i.e., future states) of the hardware or software state machine's present state.

FIG. 7 illustrates a presently preferred exemplary embodiment of a state transition diagram for use with an ICBT system implemented for a router device. For the sake of simplicity, solid lines are used for denoting both direct and indirect dependencies therein. Also, broken lines are shown where a state dependency is an OR condition of its prior states. Eight hardware states exemplified for the router device are described immediately hereinbelow:

STATE 1 (POWER CORD) 702: The Power Cord state is true if the power cord of the router is plugged into the device; otherwise it is false. The end-user activates the Power Cord state by mouse-dragging a suitable cord icon from a supplies list provided with the GUI to the AC power port of the device. No prior dependencies are provided for this state.

STATE 2 (POWER SWITCH) 704: The Power Switch state is true if the power switch of the router is in the ON position and the power cord is plugged in. Otherwise, the logic value of the state is false. The power switch of the device is preferably provided as a toggle switch between ON and OFF positions selectable by mouse-clicks. The end-user activates this state by mouse-clicking on the final dependency of the foregoing two states of the router device (i.e., the order of activating the power switch or the power cord of the device is irrelevant for the purpose of activating State 2). For State 2 to be true, it is dependent on State 1 being true. However, if the power is not plugged in, the switch can still be turned ON or OFF, regardless of the power cord connection. Accordingly, State 2 has an indirect first-order dependency on State 1.

STATE 3 (CONSOLE CONNECTOR) 706: The Console Connector state is true if the console connector wire is plugged into the console connector port of the router device; otherwise it is false. The end-user activates this state by mouse-dragging the console

cable connector icon from the supplies list to the console port of the device. No dependencies are provided for the Console Connector state 706.

STATE 4 (SERIAL CONNECTOR) 708: The Serial Connector state is true if the serial connector wire is plugged into the serial connector port of the router device; otherwise it is false. The end-user effectuates this state by mouse-dragging the serial connector cable icon from the supplies list to the serial connector port of the device. Again, no dependencies are provided for the Serial Connector state 708.

STATE 5 (TERMINAL "BOOT" SCREEN) 710: The Terminal "Boot" Screen state is true if the power switch is in the ON position, the power cord is plugged in, and the console connector is connected. The end-user activates this state by mouse-clicking on the final dependency of the three foregoing states of the router device (i.e., the activation order of the previous states does not matter). The Terminal "Boot" Screen is then displayed when the state is true (in the software emulator). When the hardware emulator of the device is being viewed, a green blinking connection light comes on when the state is true.

For State 5 to be true, it is dependent on State 1, State 2 and State 3 being true. If the power cord is not plugged in, the power switch can still be turned ON or OFF, but the router's terminal boot screen will not appear on the display of the GUI. If the power cord is in, the power switch is ON and the console connector cable is not connected, the device's boot screen will not appear also. Further, if the power cord and the console connector are connected but the power switch is in the OFF position, again the boot screen will not appear. Accordingly, State 5 has a direct dependency on State 1, State 2 and State 3.

STATE 6 (POWER LIGHT ON) 712: The Power Light ON state is true if the power switch is in the ON position and the power cord is plugged in; otherwise it is false. The end-user verifies this state by mouse-clicking on the final dependency of the foregoing two states of the router device. When the device hardware emulator is being viewed, a green POWER light comes on when the state is true.

For State 6 to be true, it is dependent on State 1 being true and State 2 being true. If the power cord is not plugged in, the power switch can be toggled between the ON and OFF positions, but no light comes on. Thus, State 6 has a direct dependency on State 1 and State 2.

STATE 7 (SERIAL CONNECTION LIGHT ON) 714: The Serial Connection Light ON state is true if the power switch is in the ON position, the power cord is plugged in, and the serial connector wire is plugged into the serial connector port of the router device. Otherwise, it is false. The end-user verifies this state by mouse-clicking on the final

dependency of the previous three states of the device and, again, a green blinking light comes on in the hardware emulator viewing when the state is true.

For State 7 to be true, it is dependent on State 1, State 2 and State 4 being true. If the power cord is not plugged in, the power switch can still be toggled between the ON and OFF positions, but no serial connection light comes on. Also, if the power cord is in, the power switch is ON and the serial cable is not connected, the serial connection light does not come on. Finally, if the power cord is in, the power switch is OFF and the serial cable is connected, again the serial light does not come on. Thus, State 7 has a direct dependency on State 1, State 2 and State 4.

STATE 8 (TERMINAL "NO CONNECTION" SCREEN) 716: The Terminal "No Connection" Screen state is true if either the power switch is in the OFF position, the power cord is not plugged in, or the console connector is not connected to the console port of the device. When the state is true, the Terminal "No Connection" Screen is displayed in the software emulator. mouse-clicking the power switch of the device produces a blinking light.

For State 8 to be true, it is dependent on either State 1 being false, State 2 being false, or State 3 being false. If the power cord is not plugged in, the power switch can still be toggled between the ON and OFF positions, and the "No Connection" Screen remains visible. If the power cord is in, the power switch is ON and the console cable is not plugged in, the "No Connection" Screen remains visible again. Finally, when the power cord is in, the power switch is OFF, and the console cable is plugged in, the "No Connection" Screen still remains visible. Thus, State 8 has an indirect dependency on each of State 1, State 2 and State 3 being false, or any combination thereof.

The hardware state model 700 described above is used for building inferences about the different states of the router hardware and software, and appropriate lesson plans and troubleshooting modules related to the state-dependent behavior of the router device. Because whether a particular software command or lesson plan can be simulated or presented, either in the field or in a "virtual" classroom, may be dependent upon a specific combination of the hardware states of the device, the end-user is guided through appropriate hardware setup and configuration before such software simulations or lesson plans may be effectuated. Furthermore, when any errors arise during an ICBT session, invoking suitable troubleshooting module or modules is also dependent upon the behavior of hardware and software states.

FIG. 8 depicts a flow diagram of an exemplary test-taking process or evaluation session provided as part of the ICBT system of the present invention. In a presently preferred exemplary embodiment, the ICBT simulator system may be launched from a remote computer (i.e., a client) that is connected via the Internet/Intranet to the server on which the system is executed. Those

of ordinary skill in the art should readily understand that there is no limitation on the type of hardware or software platforms, whether the server or client, for effectuating the ICBT simulator system of the present invention. Any known or hitherto unknown hardware architectures and Operating Systems may be advantageously employed for the purposes of the present invention. Also, any known or hitherto unknown browser tools operable with IP-based networks may be used for accessing the server site via a suitable protocol, for example, the well-known HyperText Transfer Protocol (HTTP).

Upon executing appropriate authentication procedures, the end-user is authorized to launch the ICBT simulator system (step 802) which may be optimized for a particular piece of equipment such as, for example, a network element (i.e., a router, brouter, or a bridge, et cetera). When a suitable GUI is presented, the end-user may activate one or more portions of the interface to initiate an ICBT session (step 804). By activating a test or quiz menu on the interface, the end-user can take a quiz on a particular topic related to the simulated equipment (step 806). Preferably, a "real-time" assessment of the quiz is done so that if the end-user fails the quiz (decision block 808), a menu of options may be presented from which the end-user can select a suitable option (step 810). For example, the option menu may include a link to an appropriate lesson plan, a relevant multimedia presentation (if available), or an option to re-take the quiz. On the other hand, upon successfully completing the quiz, the end-user may continue with other ICBT sessions (step 812) or may conclude the testing session. Further, because of the flexible modularity of the ICBT system of the present invention, the end-user can elect to take additional lesson plans, launch related multimedia presentations, query on-line help modules, etc.

Referring now to FIG. 9, depicted therein is a flow diagram of an adaptive troubleshooting session provided in the ICBT system of the present invention. In this example, after launching the ICBT simulator system (step 902) and activating the user interface (step 904) as described hereinabove, the end-user initializes and configures the device in accordance with a lesson plan, learning module, etc. Thereafter, the end-user enters a command for effectuating a hardware, software, or firmware function of the emulated device. If an error is reported by the command inference engine of the ICBT simulator (decision 906), the end-user may activate an appropriate troubleshooting module (step 910). In accordance with the teachings of the present invention, the troubleshooting module maintains a personal profile for the end-user in terms of the end-user's prior configuration/installation settings, command usage, prior errors and causes therefor, et cetera, in a historical database. Based on this "intelligence," a list of most common causes that are likely to have caused the particular error is returned by the ICBT system (step 912). If the actual cause of the error is not on the list, a learning routine in the troubleshooting module is activated (step 914) so that the "new" cause is added to the personal profile of the end-user when the problem is subsequently identified and solved (step 916). In this manner, the

personal profile of the end-user is adaptively updated, thereby reducing the time associated with troubleshooting in the field. Once again, because of the flexible modularity of the simulator system, the end-user has the option of continuing with the ICBT session in any appropriate manner, including session termination (step 908).

FIGS. 10A through 10N depict exemplary screen shots of a presently preferred ICBT system implemented for a router device. FIG. 11 is an exemplary screen shot of a presently preferred ICBT system implemented for a network switch. It is believed that the contents of these exemplary screen shots are self-explanatory and, accordingly, only some of the salient features are described in greater detail hereinbelow.

FIG. 10A illustrates an initial GUI screen 1000 for router installation. A main menu bar 1002 includes a plurality of icons exemplifying the inter-dependent modular architecture of the present invention. An INTRODUCTION icon 1006, HARDWARE icon 1008, SOFTWARE icon 1010, TROUBLE SHOOTING icon 1012, REFERENCE icon 1014 and a HELP icon 1016 are provided. An EXIT option 1038 allows the end-user to de-activate and/or terminate an ICBT session. As is well-known, the end-user can click on any of the main options by pointing an appropriate input device (e.g., a mouse) on one of several icons of the main menu bar 1002. A main display area 1036 may initially preferably illustrate a router 1004. Those of ordinary skill in the art will recognize that appropriate company logos, equipment manufacturer's identification, markings and/or logos, 3-D animated presentations, et cetera, may also be included to enhance the interactive experience of the ICBT system.

FIG. 10B illustrates a screen shot 1001 associated with the INTRODUCTION icon 1006. The main display area 1036 preferably includes a text portion 1018 for presenting appropriate technology background information on routers. A plurality of graphics areas, e.g., graphics areas 1020A through 1020C, are also provided to visually enhance the background information on the device being emulated.

FIG. 10C illustrates a hardware emulator screen shot 1003 associated with the HARDWARE icon 1008. A plurality of lesson plans are provided as a pull-down option menu 1022. FIG. 10D depicts a screen shot 1005 that is generated when one of these lesson plans is activated. The lesson plan screen shot 1005 preferably includes a multimedia-enhanced device book portion 1028 which shows text information 1030 relating to the hardware plan selected, a graphics image 1032 for the relevant hardware component, and a video clip 1034 therefor. Also shown in the main display area 1036 is a hardware components area 1024 wherein an appropriate supplies list, e.g., connectors, cables, ports, straps, etc. are "iconized" for selection by the end-user. The router 1004 is rotatable by manipulating a ROTATE arrow icon 1026 so that both the front- and back-sides of the router may be examined and used for appropriately connecting the several cables and connectors provided therewith.

FIG. 10E illustrates another exemplary hardware lesson screen shot 1007 for making the network connections, that is, for emulating the router connections within a network. FIG. 10F exemplifies a terminal emulator screen shot 1009 which shows a pull-down menu 1040 for selecting from a plurality of software lessons.

5 FIG. 10G provides a software command reference screen shot 1011. The commands are preferably grouped in a COMMAND CATEGORIES list 1042. A scrollable dialog box 1044 provides the relevant commands that are selected from the command category. Another scrollable dialog box 1046 provides the use, syntax and format of a particular command.

10 As shown in FIG. 10H, a reference manual is provided as a device book 1048, having the contents therein organized into several topics 1052, and is preferably provided to be activatable from the hardware emulator as exemplified in FIG. 10C. FIG. 10I illustrates a screen shot 1015 for power cable reference, with a graphics image 1050 therefor. Similarly, FIG. 10J illustrates a screen shot 1017 for providing reference to the chassis, with a video clip 1054. Reference to the power switch of the router is exemplified in the screen shot 1019 depicted in FIG. 10K. 15 Reference to a ground strap used by technicians while working on routers is exemplified in the screen shot 1021 shown in FIG. 10L.

FIG. 10M illustrates a screen shot 1023 for an exemplary quiz plan. An on-line glossary screen 1025 is illustrated in FIG. 10N. Preferably, the terms and acronyms included in the glossary are provided in a scrollable dialog box provided in the main display area 1036 of the GUI. 20

Whereas the GUI of the router simulator system described above is provided to be more "icon-rich," a different "look and feel" is provided for the exemplary GUI screen shot 1100 of a presently preferred network switch simulator shown in FIG. 11. However, it should be understood that the underlying inter-dependent modular architecture that integrates hardware and software state transition schemes, lesson plans, troubleshooting modules is essentially similar to the router simulator architecture, except for the necessary and appropriate switch-specific modifications. Accordingly, it should be appreciated that the modular ICBT system of the present invention may be provided for any piece of equipment that can be characterized in discrete states and components, and the "look and feel" of the user interface may be as variable as a particular implementation may allow or require. 25 30

Based on the foregoing, it should be appreciated that the present invention advantageously provides a highly interactive CBT system that overcomes the deficiencies and shortcomings of the prior art in terms of ease of use, flexibility, and more "real-life" training necessary for effective job performance. Because the ICBT system of the present invention may be accessed via a computer network on a 24-hour/seven-days-a-week basis as needed, no travel time or expense is needed to provide high quality training to a distributed work force. 35

In addition, it should be further appreciated that the equipment simulators of the ICBT system can be used as a reference tool as well as a training tool, thereby reducing or obviating the need for a centralized technical support staff. Also, by employing a suitable Web-based framing format, virtually an unlimited number of technicians can be trained at the same time at their own job stations, each taking only those sections or lesson plans suited to his or her current training session.

Further, it is believed that the operation and construction of the present invention will be apparent from the foregoing Detailed Description. While the method and system shown and described have been characterized as being preferred, it should be readily understood that various changes and modifications could be made therein without departing from the scope of the present invention as set forth in the following claims. For example, although the presently preferred exemplary embodiments of the present invention have been implemented using ToolBook, an application authoring package based on OpenScript language, it should be realized that the present invention may be practiced using any programming medium including, for example, one with appropriate dynamic link libraries (DLLs) coded in C or C++ language, etc. Also, whereas the teachings of the present invention have been particularly exemplified with a router device, it should be apparent as mentioned hereinabove that virtually any piece of equipment (e.g., customer premises equipment, switching equipment such as data, voice and multimedia switches, testing equipment, and the like) whose behavior can be simulated (i.e., modeled) using state machine transitions can be provided with a suitable ICBT system therefor. In addition, individual screen shots and dialog boxes have been provided by way of example only and should not be interpreted as providing limitations of any kind with respect to the teachings of the present invention. Clearly, the sequence or order of such screen shots and their contents may be presented in numerous permutations/combinations thereof. Accordingly, it should be clearly understood that these and other variations, substitutions, additions, re-arrangements and modifications are contemplated to be within the ambit of the present invention whose scope is solely limited by the claims set forth below.

WHAT IS CLAIMED IS:

- 1 1. A state transition method for a state machine having a plurality of
2 states effectuated in a computer-readable memory system, comprising the steps
3 of;
4 identifying a current state of said state machine wherein a transition
5 is to be effectuated;
6 determining if there is a state immediately prior to said current
7 state, said state being a first order state, and if so, determining whether there is a
8 dependency of said current state on said immediately prior state, said dependency
9 being a first order dependency;
10 inferring a reference value associated with said current state based
11 on said first order dependency; and
12 determining a future state of said state machine based on said
13 reference value.
- 1 2. The state transition method as set forth in claim 1, further
2 comprising the step of determining if said first order dependency is a direct
3 dependency.
- 1 3. The state transition method as set forth in claim 1, further
2 comprising the step of determining if said first order dependency is an indirect
3 dependency.
- 1 4. The state transition method as set forth in claim 1, further
2 comprising the steps of:
3 determining if said immediately prior state has a dependency on a
4 state prior thereto, said state being a second order state and said dependency on
5 said second order state being a second order dependency; and
6 inferring said reference value associated with said current state
7 based on said first order dependency and said second order dependency.
- 1 5. The state transition method as set forth in claim 4, wherein said
2 second order dependency comprises a direct dependency.

1 6. The state transition method as set forth in claim 4, wherein said
2 second order dependency comprises an indirect dependency.

1 7. The state transition method as set forth in claim 1, wherein said
2 reference value associated with said current state comprises a NULL value.

1 8. The state transition method as set forth in claim 1, wherein said
2 reference value associated with said current state comprises a zero.

1 9. The state transition method as set forth in claim 1, wherein said
2 reference value associated with said current state comprises a specific value.

1 10. The state transition method as set forth in claim 1, further
2 comprising the steps of:
3 determining if said current state has multiple orders of
4 dependencies on a plurality of previous states; and
5 inferring said reference value associated with said current state
6 based on said multiple orders of dependencies.

1 11. A state transition inference engine for a state machine having a
2 plurality of states effectuated in a computer-readable memory system, comprising:
3 means for identifying a current state of said state machine wherein a
4 transition is to be effectuated;
5 means for determining whether there is a dependency of said
6 current state on a state immediately prior to said current state, said dependency
7 being a first order dependency;
8 means for inferring a reference value associated with said current
9 state based on said first order dependency; and
10 means for determining a future state of said state machine based on
11 said reference value.

1 12. The state transition inference engine as set forth in claim 11, further
2 comprising means for determining if said first order dependency is a direct

3 dependency.

1 13. The state transition inference engine as set forth in claim 11, further
2 comprising means for determining if said first order dependency is an indirect
3 dependency.

1 14. A state machine for simulating hardware functionality of a router
2 exemplified in an interactive computer-based training (CBT) system for training
3 users, wherein said state machine is effectuated in a computer-readable memory
4 system, comprising:

5 a Power Cord state having a logic value of true when a power cord
6 associated with said simulated router is connected a power port thereof;

7 a Power Switch state having a logic value of true if a power switch
8 associated with said simulated router is in ON position and said power cord is
9 connected to said power port;

10 a Power Light state having a logic value of true if said power switch
11 is in ON position and said power cord is connected to said power port;

12 a Console Connector state having a logic value of true if a console
13 connector cable associated with said simulated router is plugged into a console
14 connector port thereof;

15 a Serial Connector state having a logic value of true if a serial
16 connector cable associated with said simulated router is plugged into a serial
17 connector port thereof;

18 a Serial Connection Light state having a logic value of true if said
19 power cord is plugged in, said power switch is in ON position and said serial
20 connector cable is plugged into said serial connector port;


21 a Terminal Boot Screen state having a logic value of true if said
22 power switch in ON position, said power cord is plugged in and said console
23 connector cable is plugged into said console connector port of said simulated
24 router; and

25 a Terminal No Connection Screen state having a logic value of true
26 if at least one of the following conditions is true: said power switch is in OFF
27 position, said power cord is not plugged in and said console connector cable is not

28 plugged into said console connector port of said simulated router.


1275-0002

FIG. 1 (PRIOR ART)

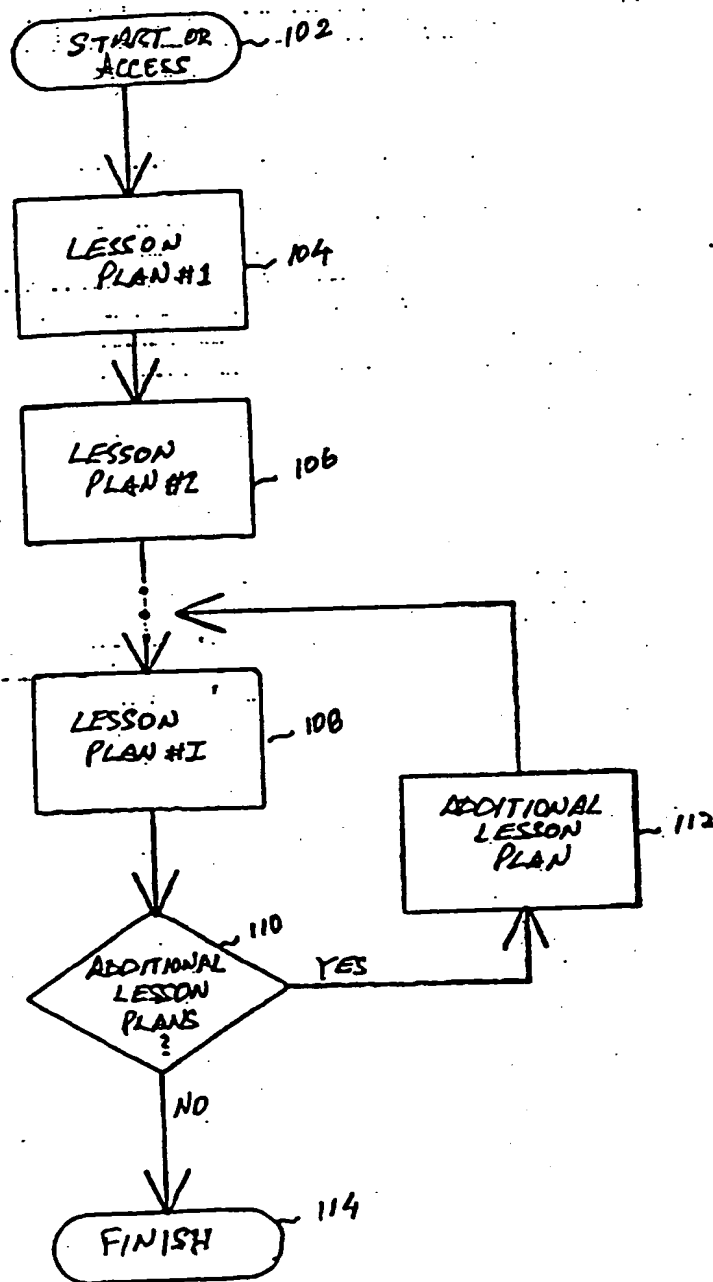


1275-0002

FIG. 2

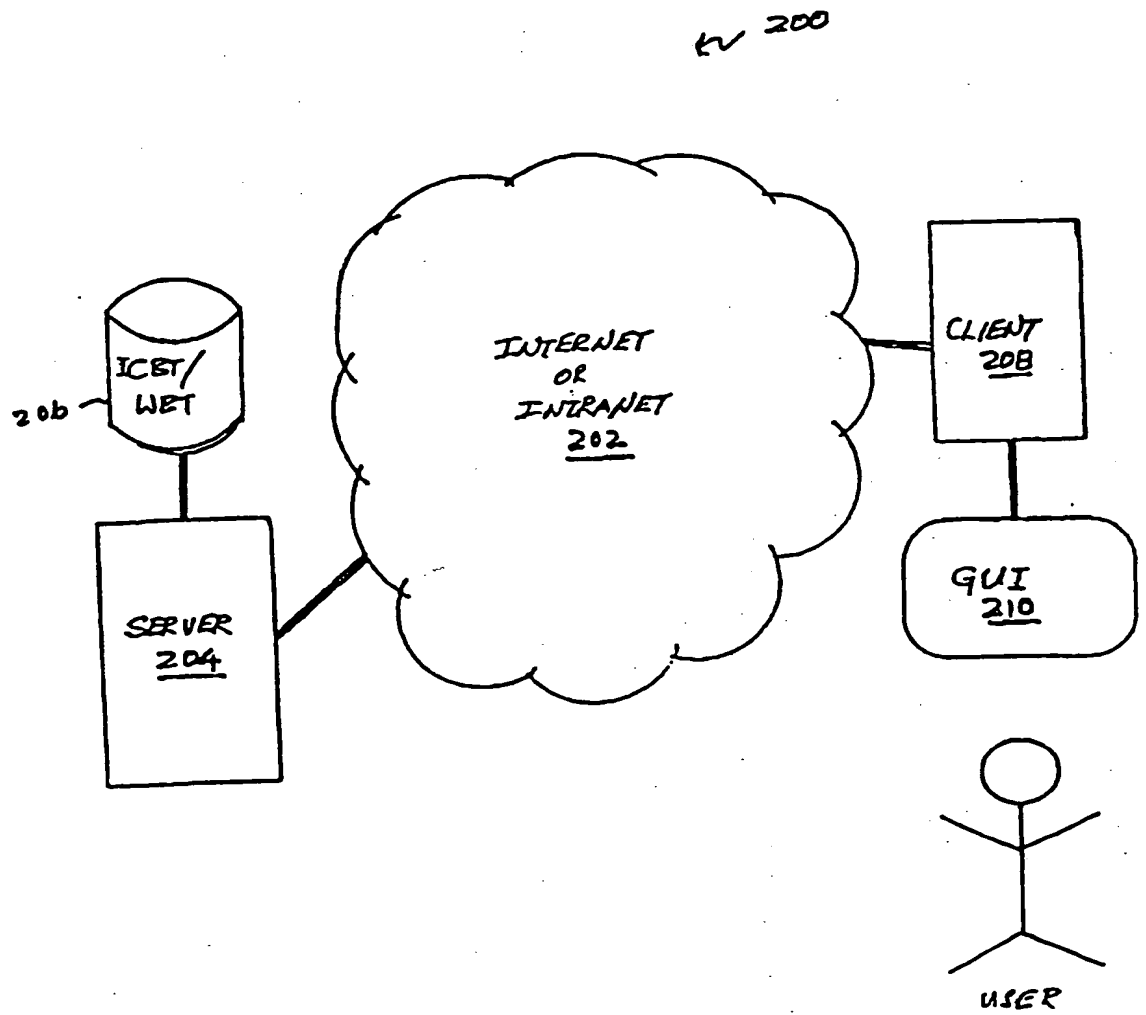


1275-0002

FIG. 3

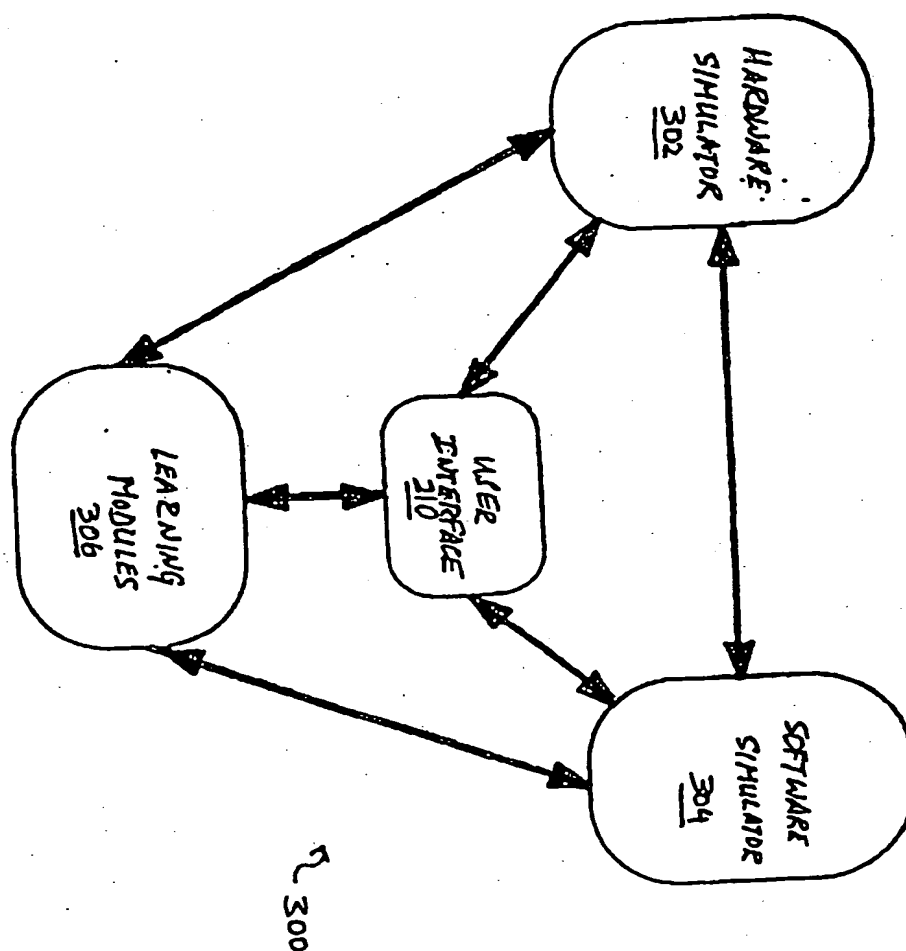


1275-0002

FIG. 4

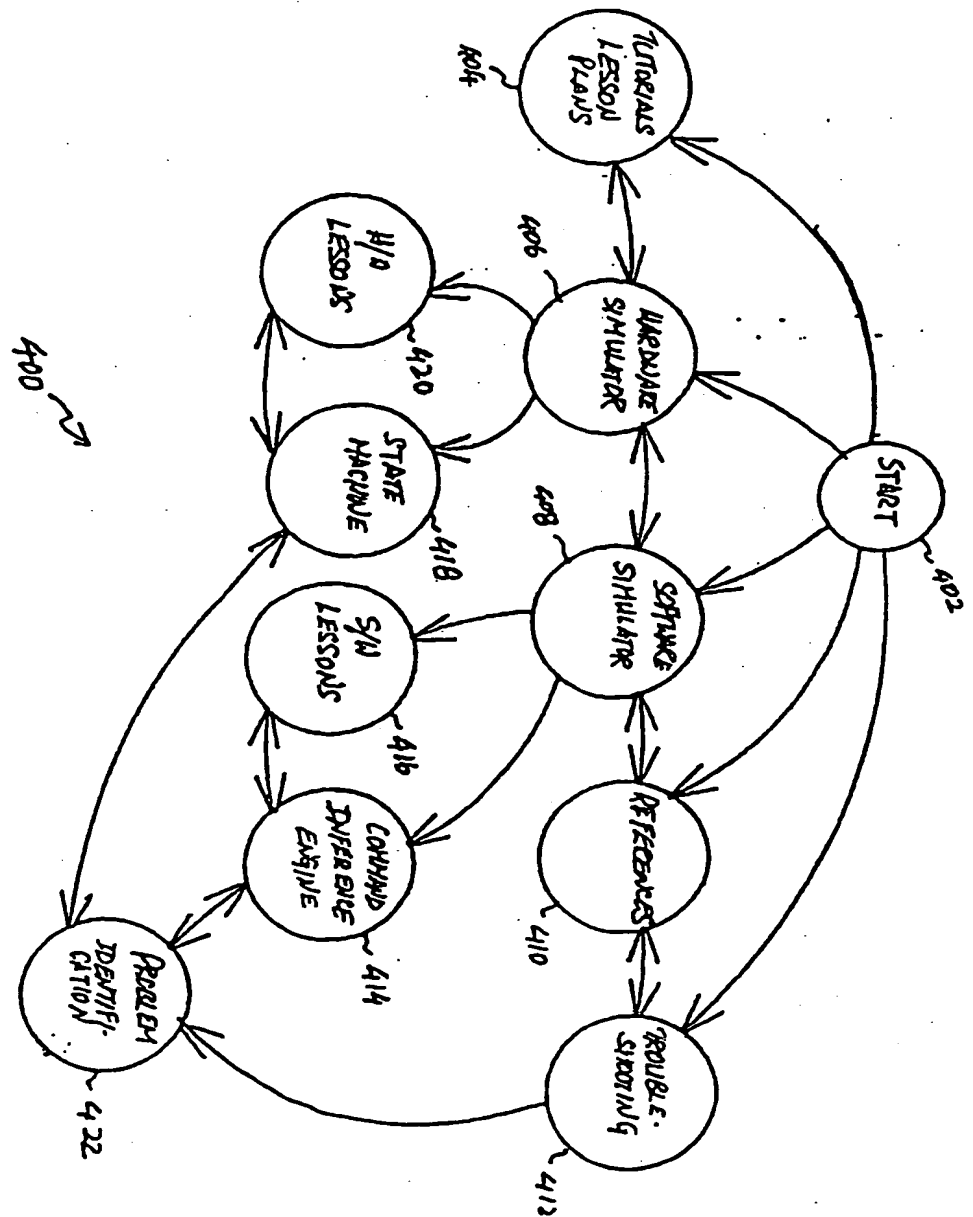


1295-0002

FIG. 5

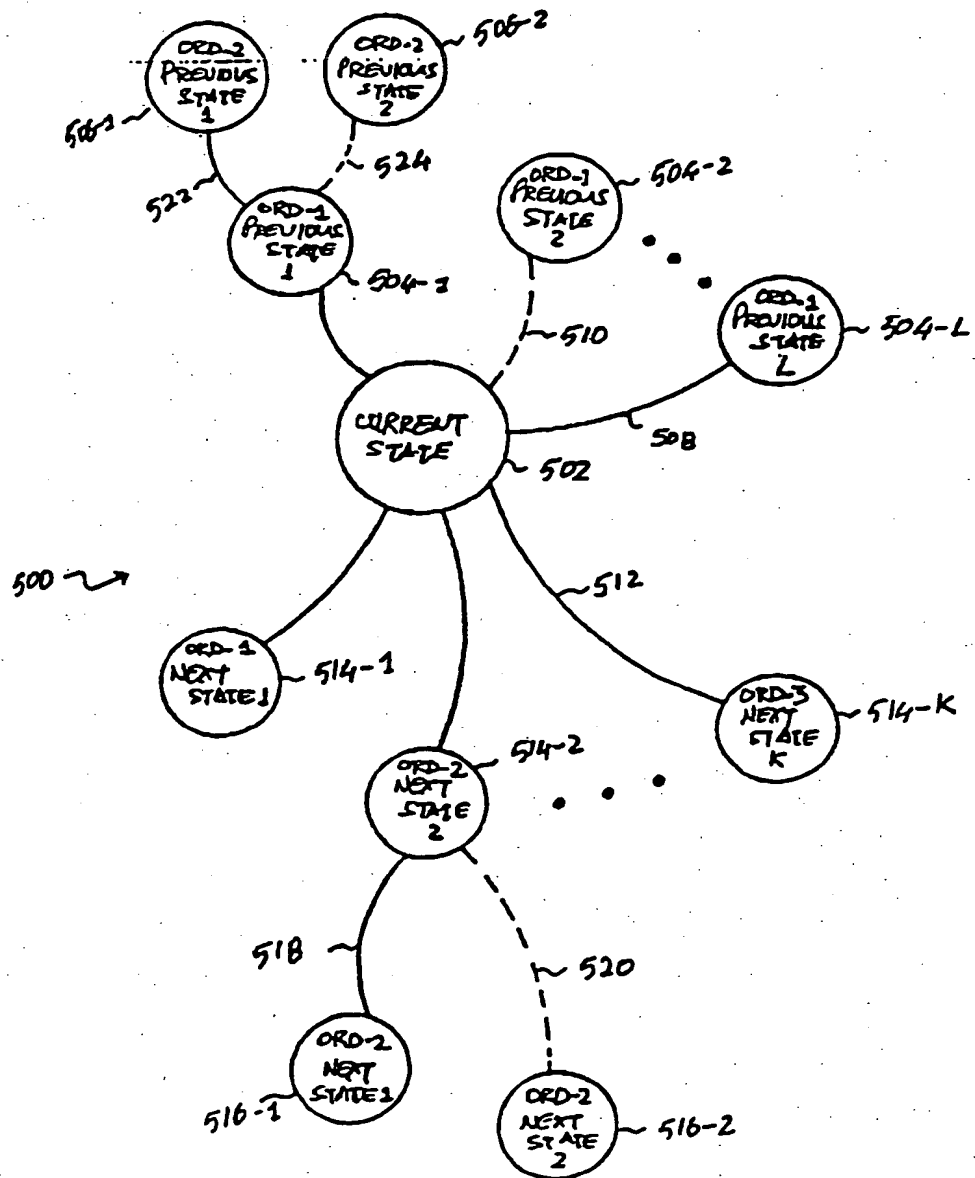


1275-0002

FIG. 6

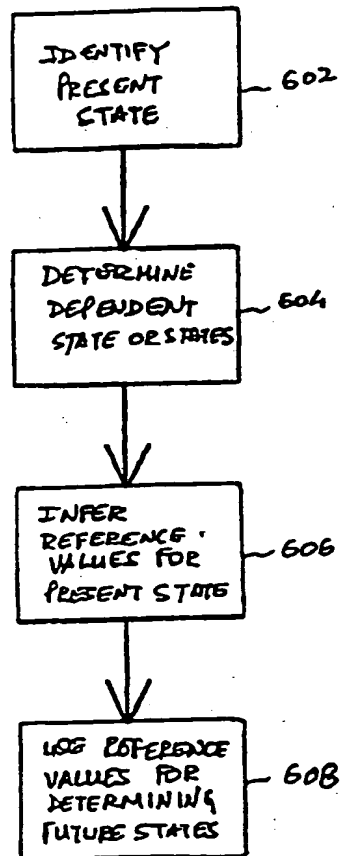


12750002

FIG. 8

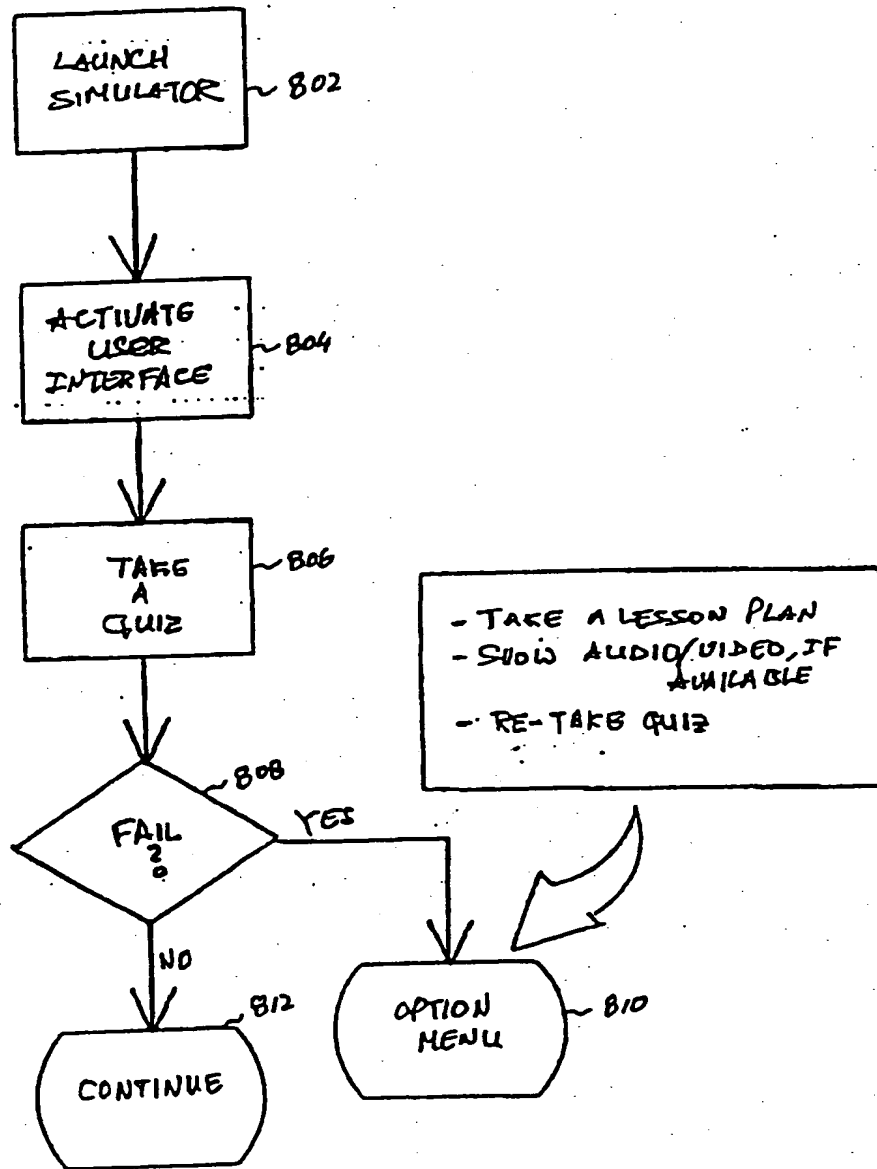


1275-0002

FIG. 9

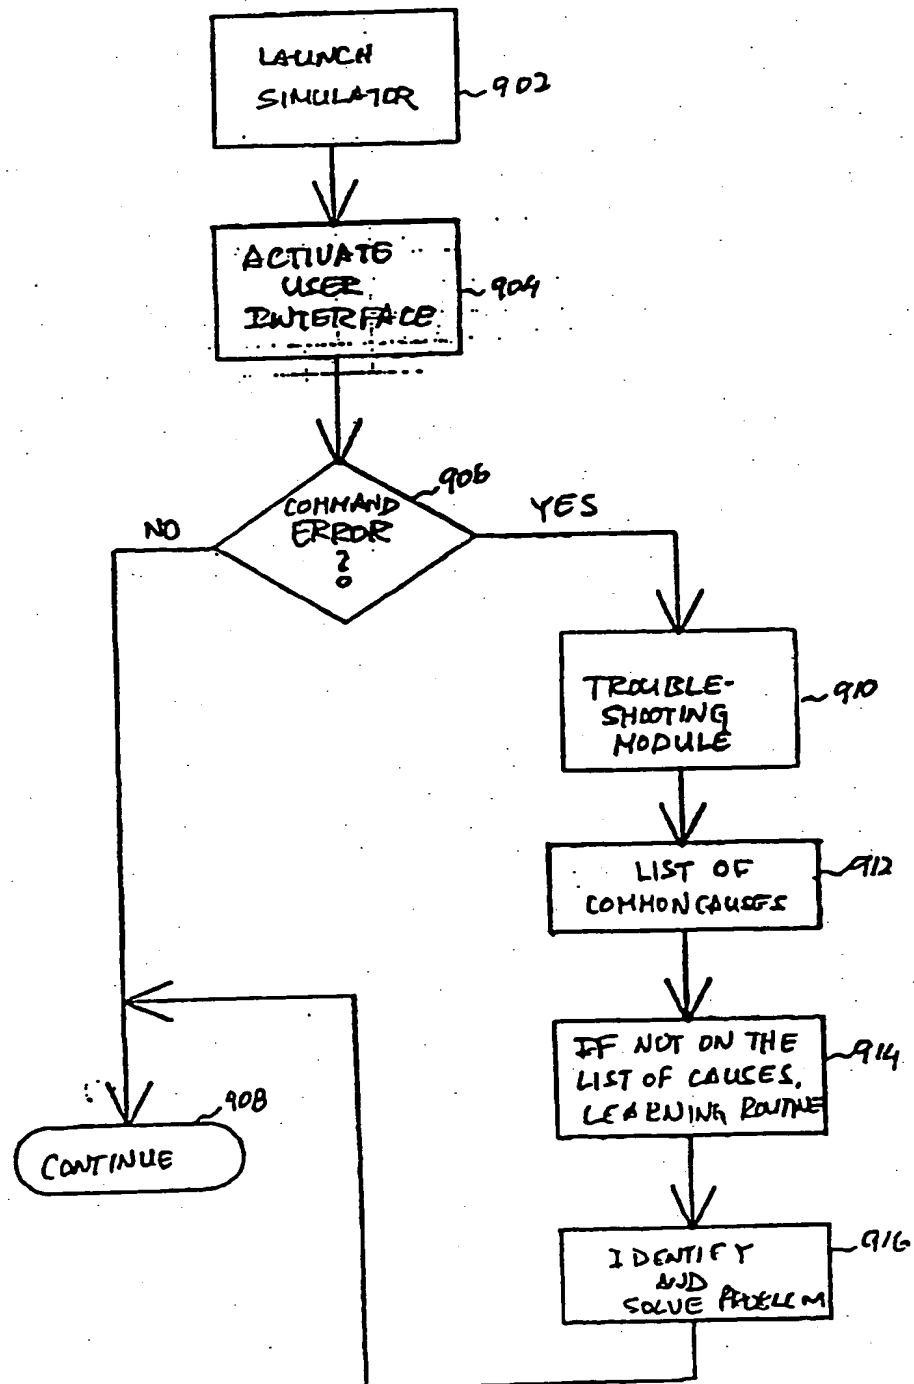


1275-0102

Fig. 1A

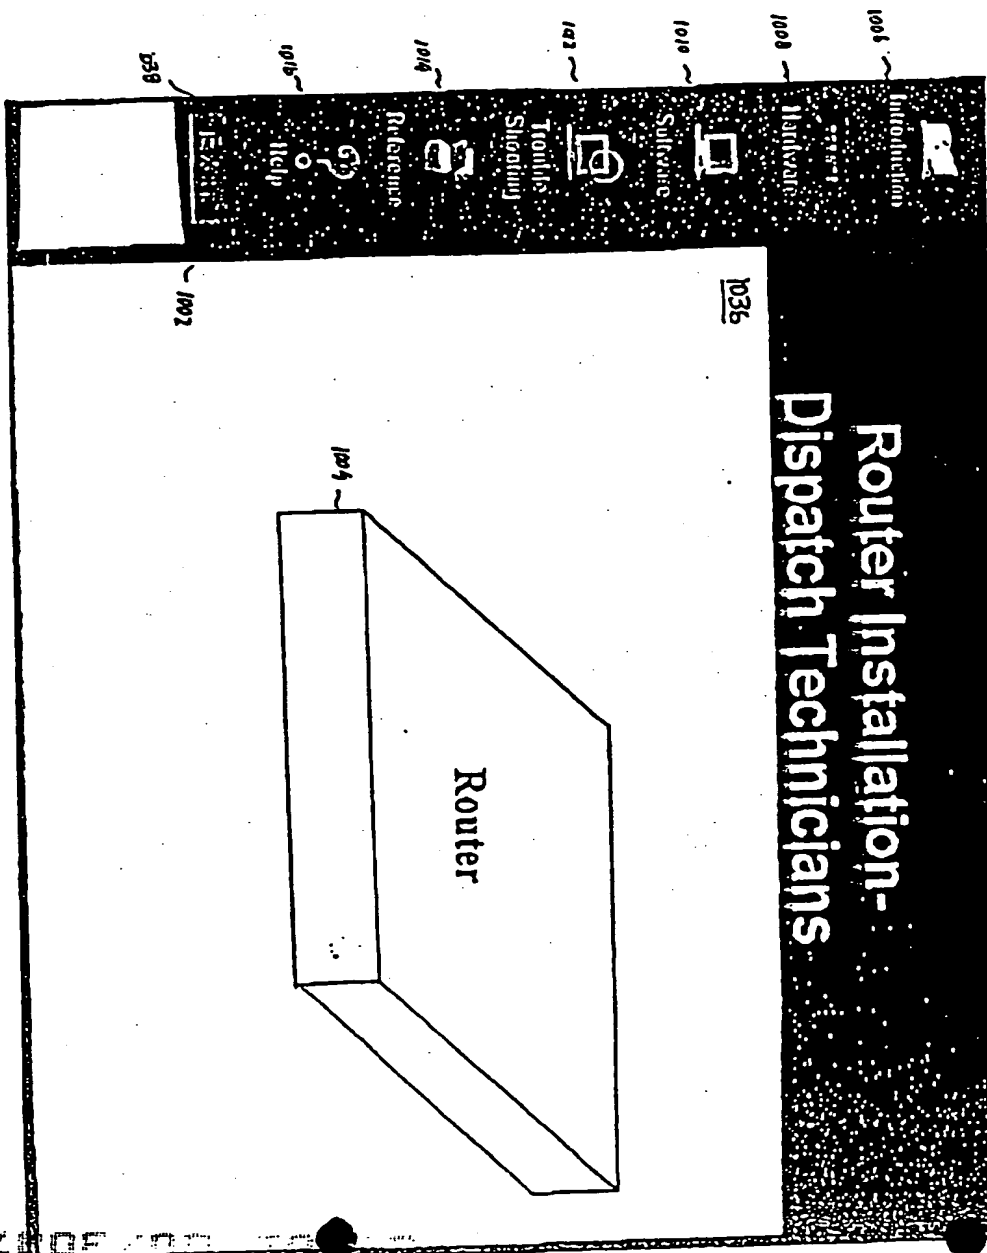

12:15-0002

Fig. 10B

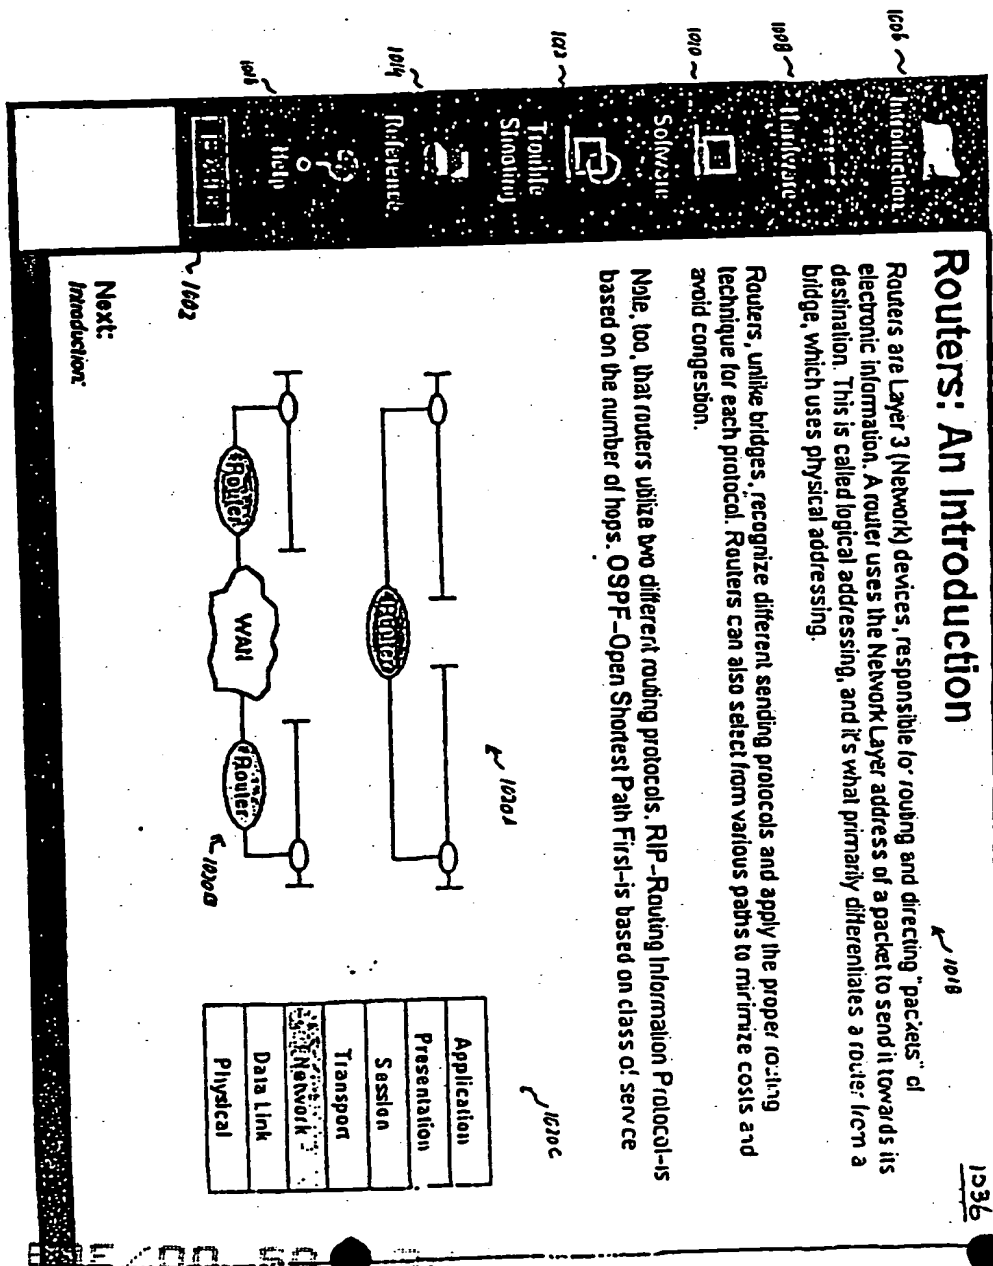

1275 0002

Fig. 10C.

Terms and Acronyms Glossary

Hardware Emulator

Hardware Lessons

- 1008 Hardware Installation
- 1010 Establishing the Network Connections
- 1012 Connecting the Console Terminal
- 1014 Troubleshooting
- 1016 Reference
- 1018 Help

Hardware Lessons

- 1008 Hardware Installation
- 1010 Establishing the Network Connections
- 1012 Connecting the Console Terminal
- 1014 Troubleshooting
- 1016 Reference
- 1018 Help

Hardware Lessons

- 1008 Hardware Installation
- 1010 Establishing the Network Connections
- 1012 Connecting the Console Terminal
- 1014 Troubleshooting
- 1016 Reference
- 1018 Help

Hardware Lessons

- 1008 Hardware Installation
- 1010 Establishing the Network Connections
- 1012 Connecting the Console Terminal
- 1014 Troubleshooting
- 1016 Reference
- 1018 Help

1275-0002

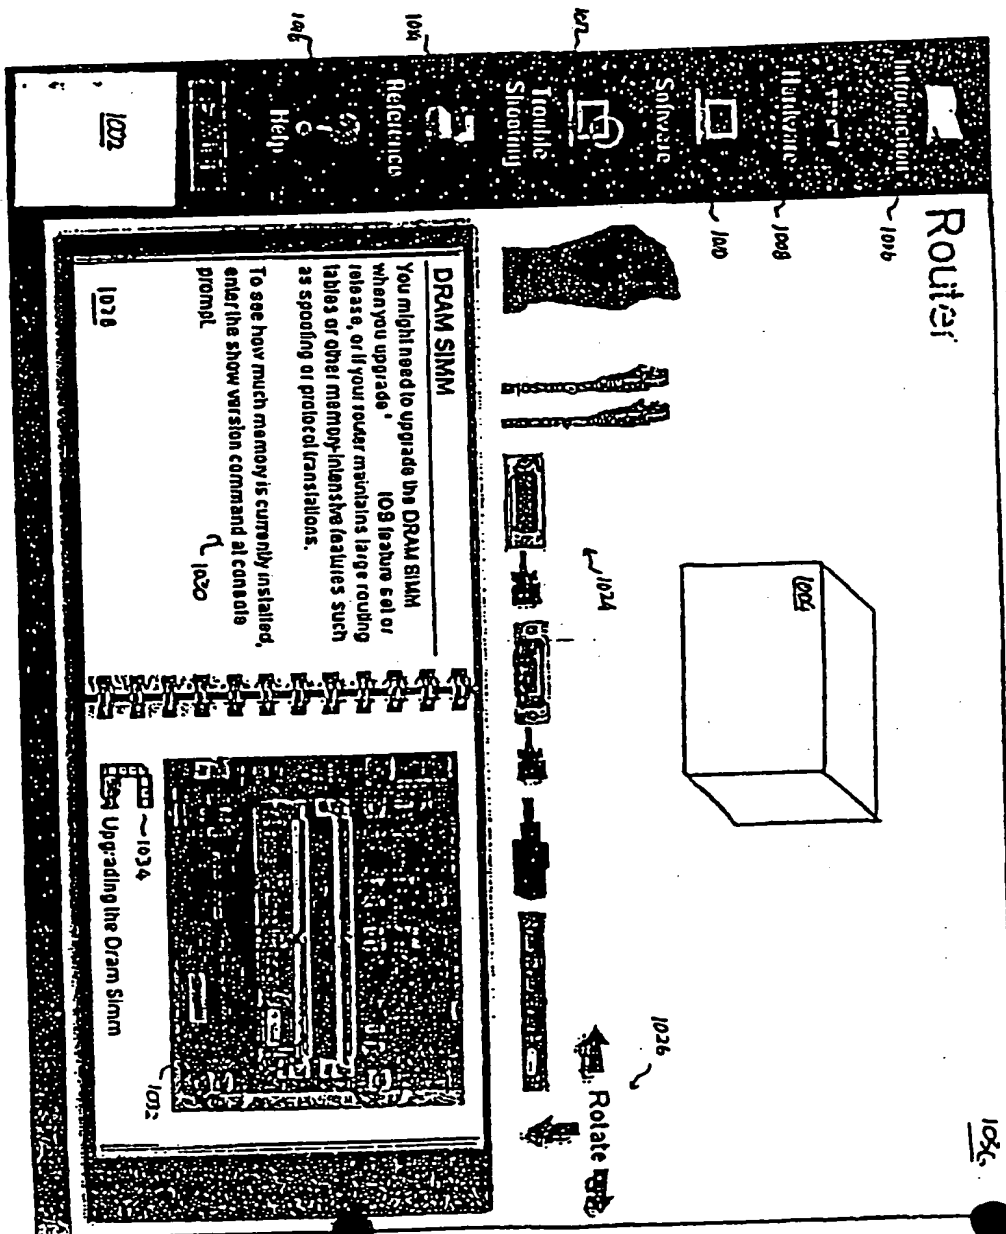



Fig. 10D

1003

1005


17.75-0002

Fig. 10E

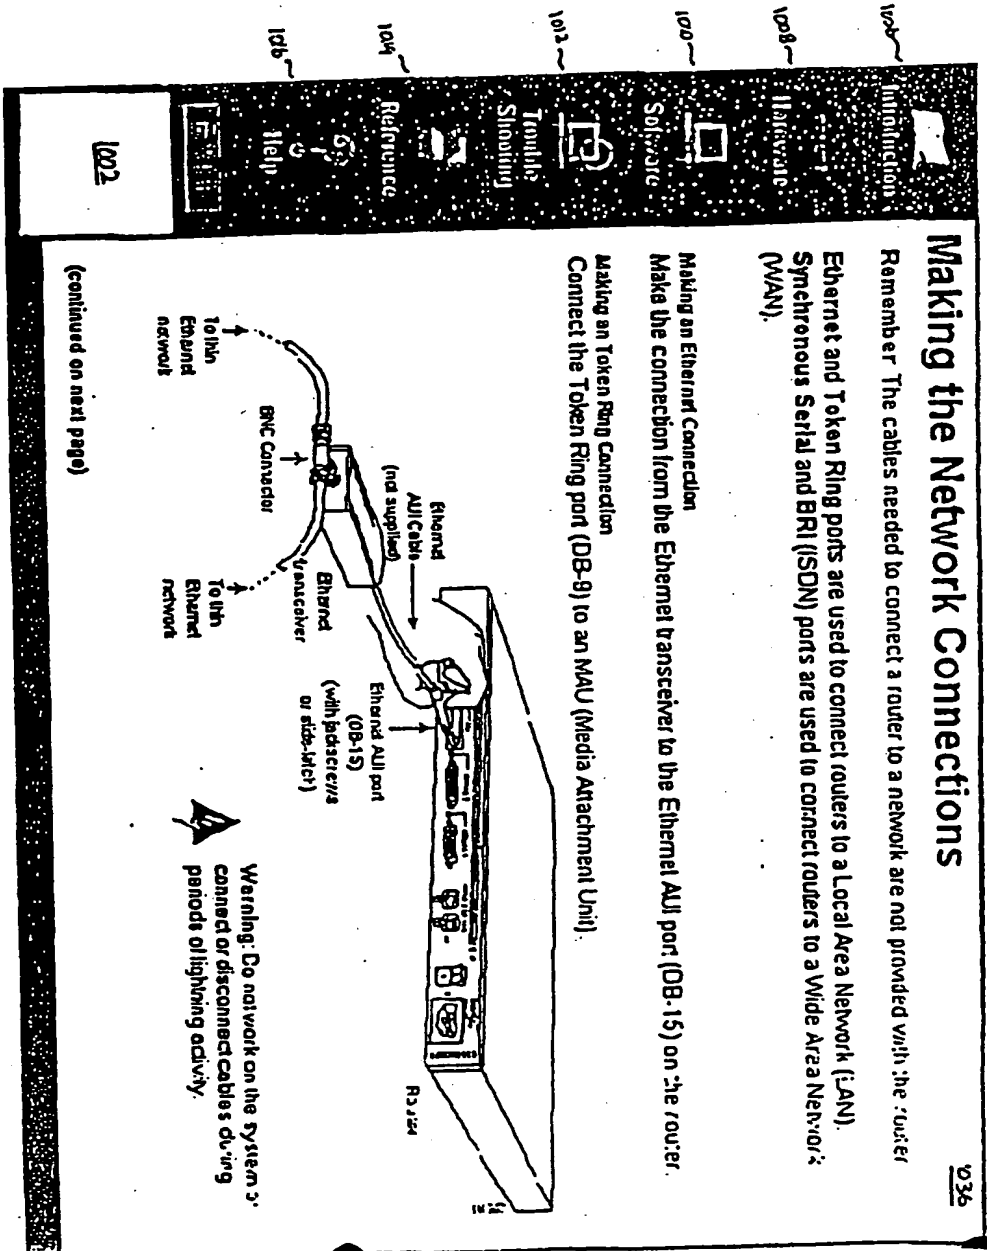


12-7-95 06:02

Fig. 10 F

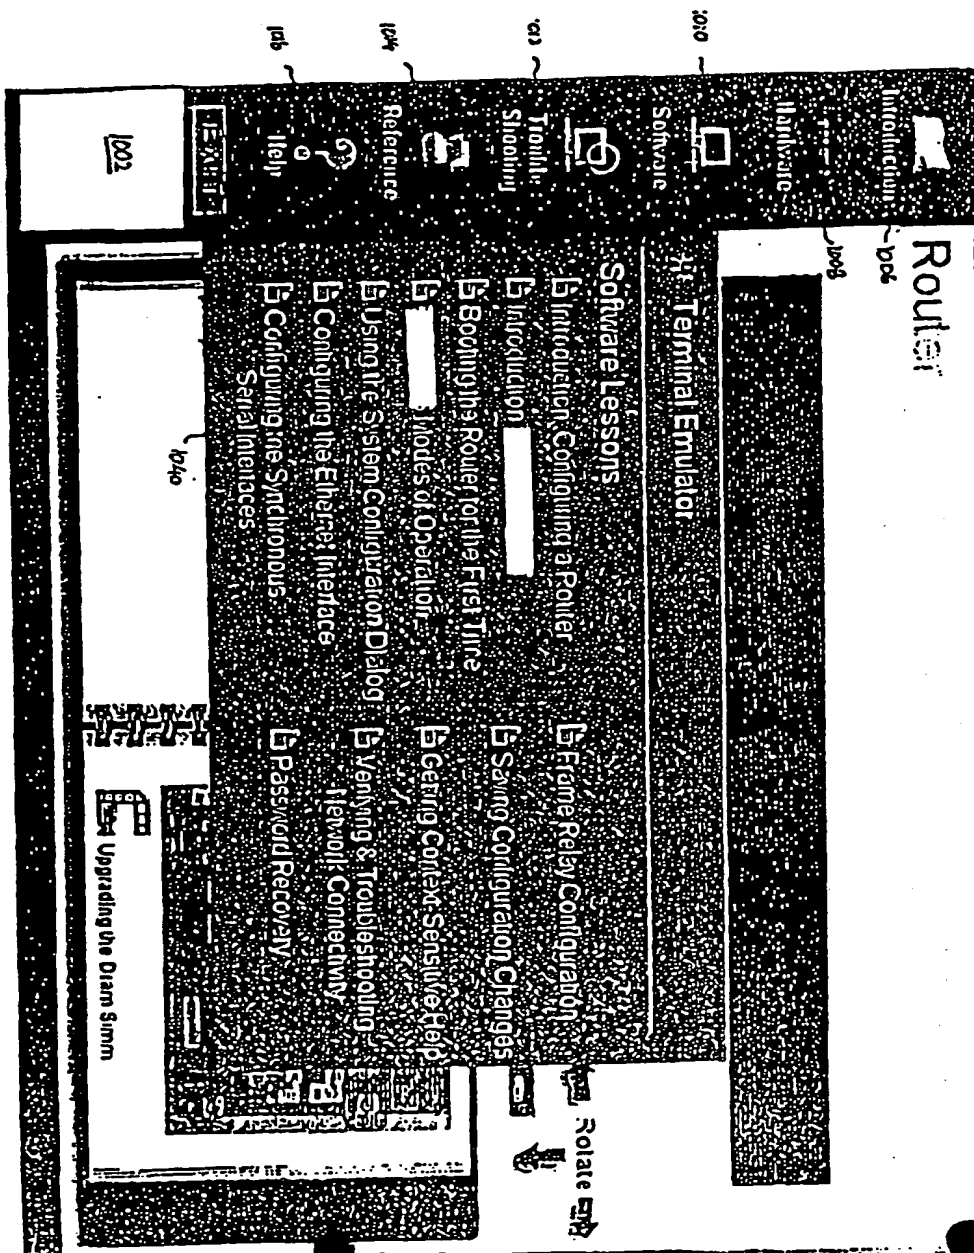

1000-1000


Fig. 104

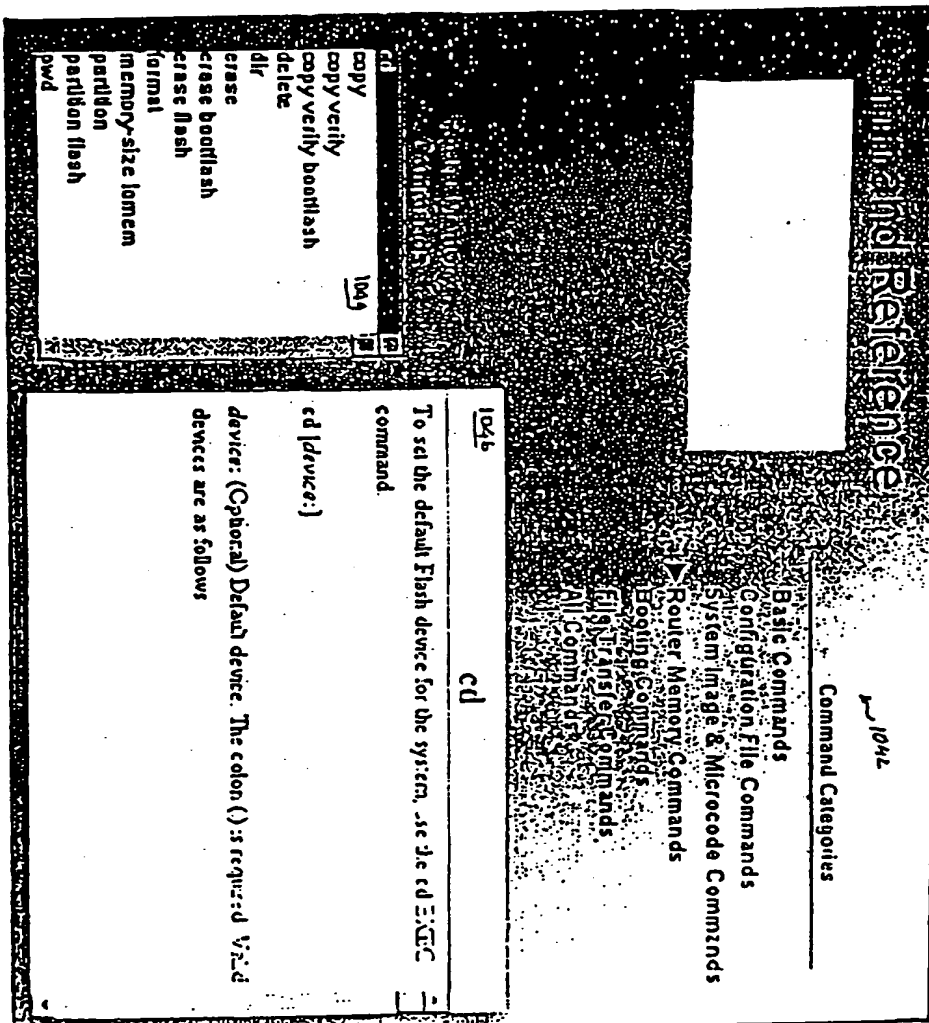

1275-0000


Fig. 10H

1013

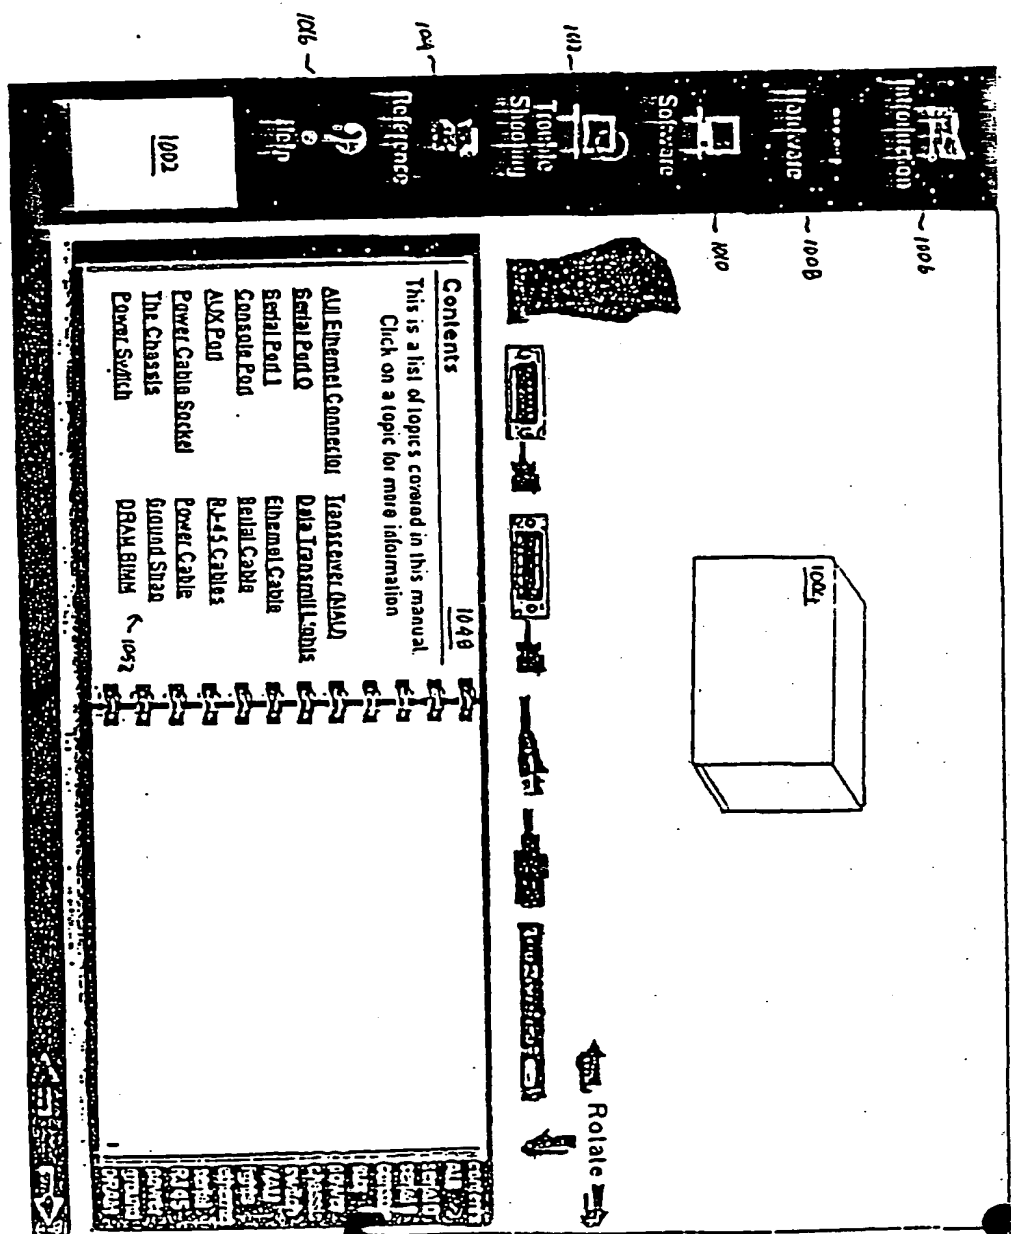


1275-0002

Fig. 101

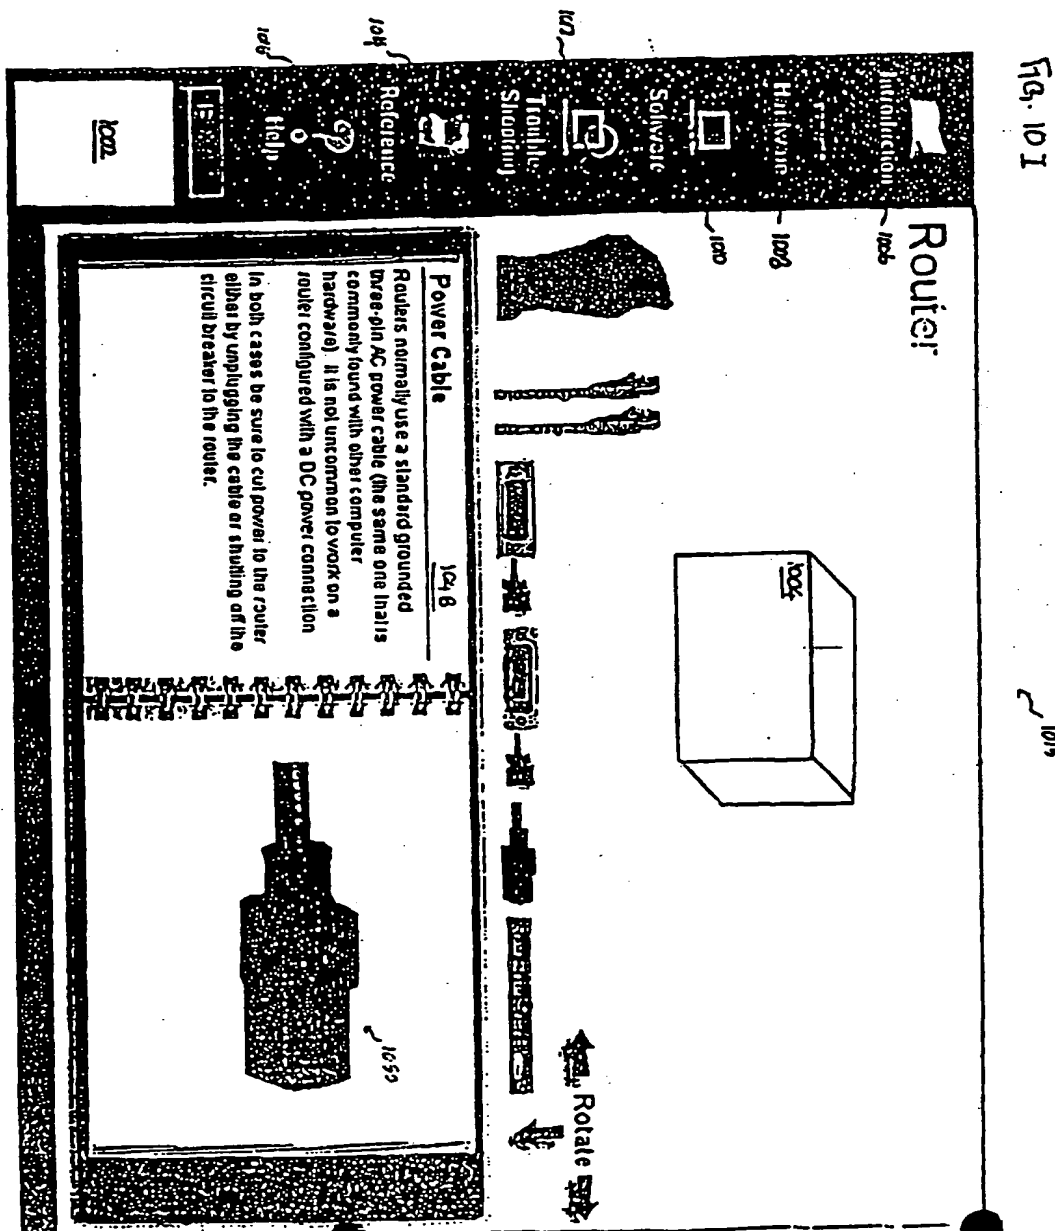


1275-0002


Fig. 10J

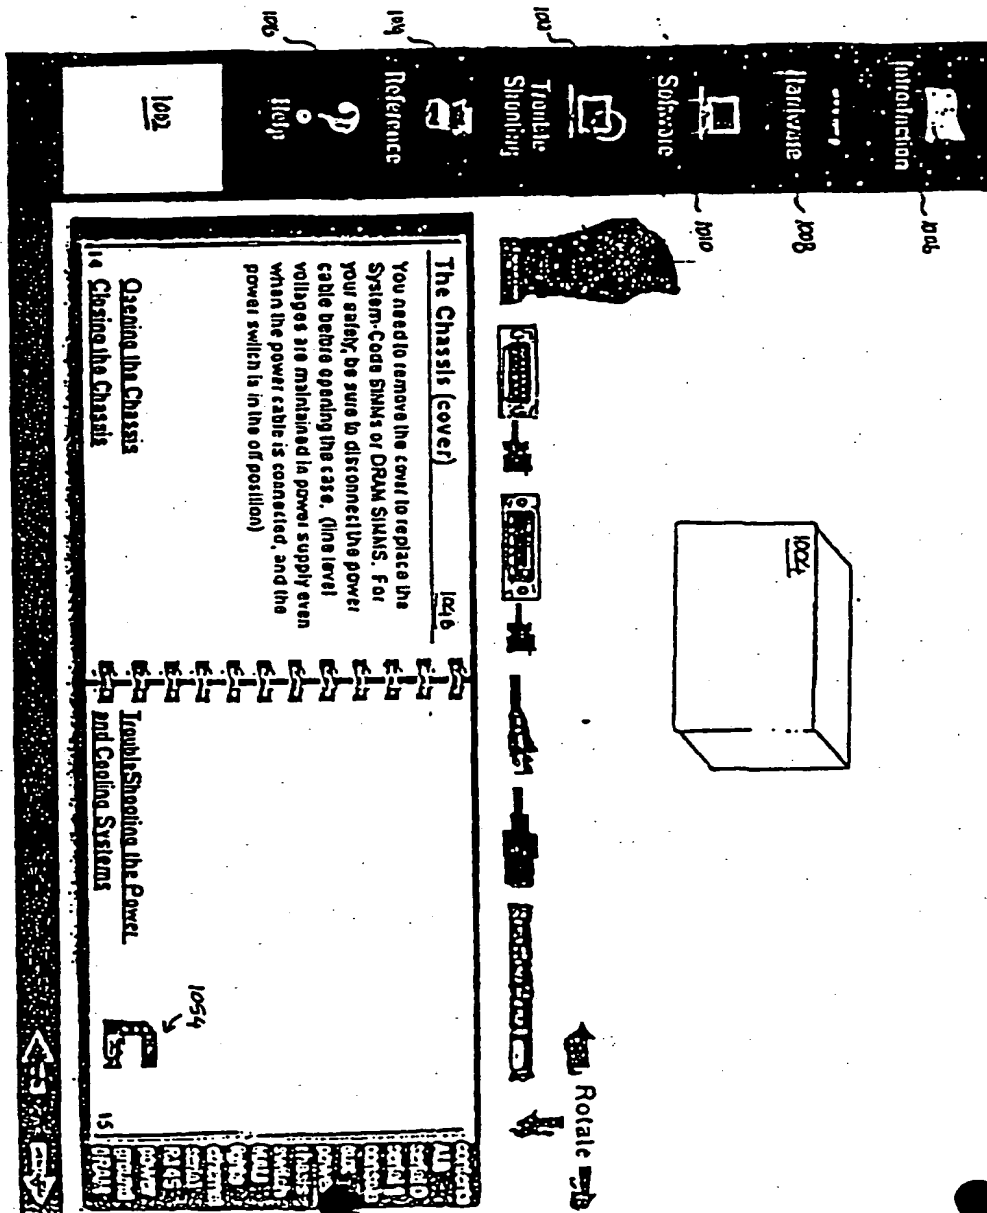

1229-0002

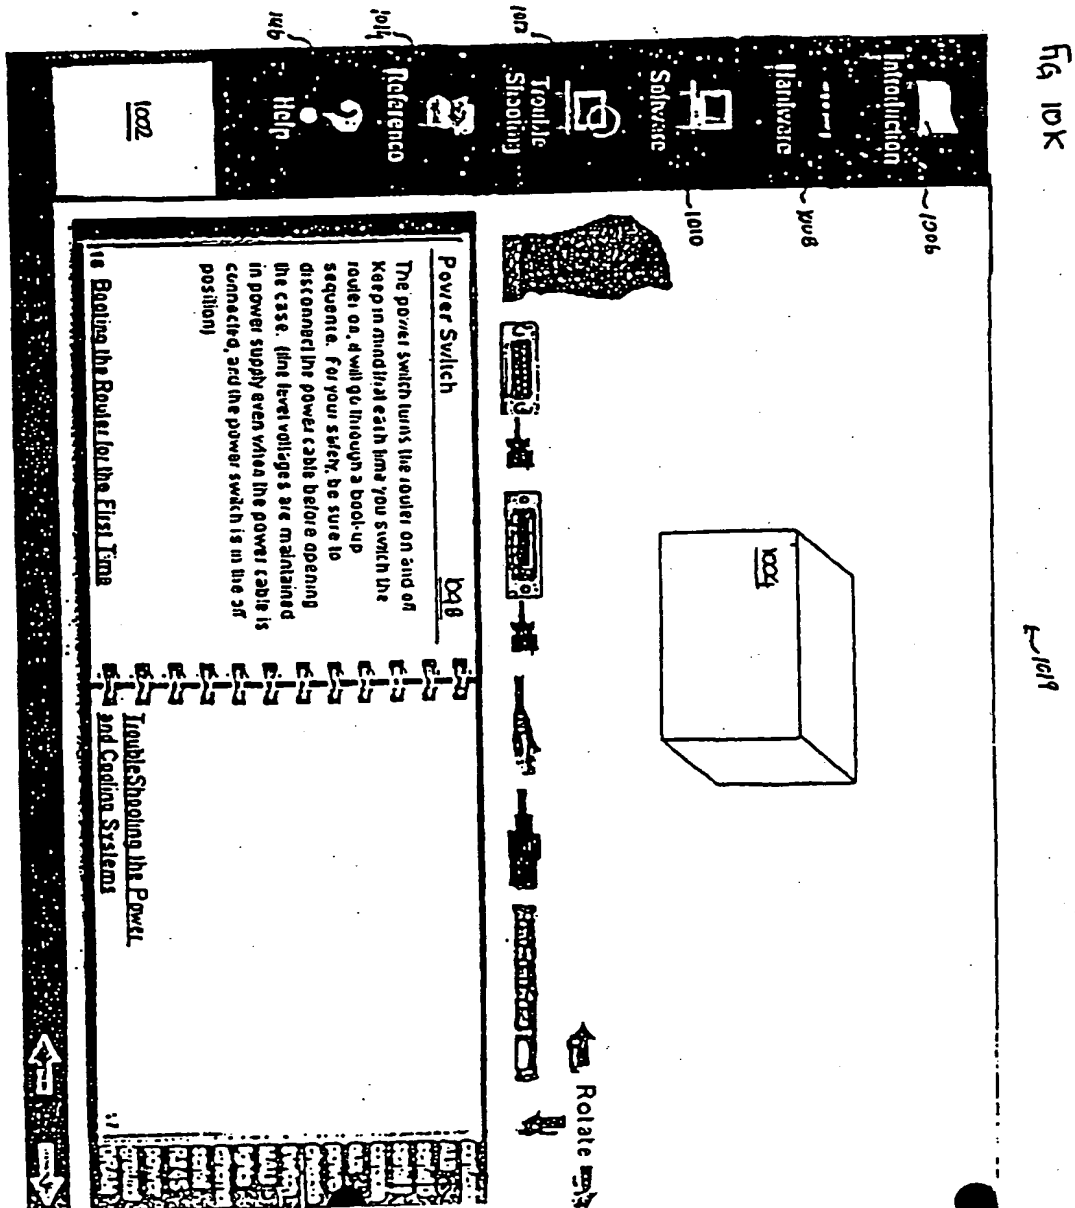

1275-0002

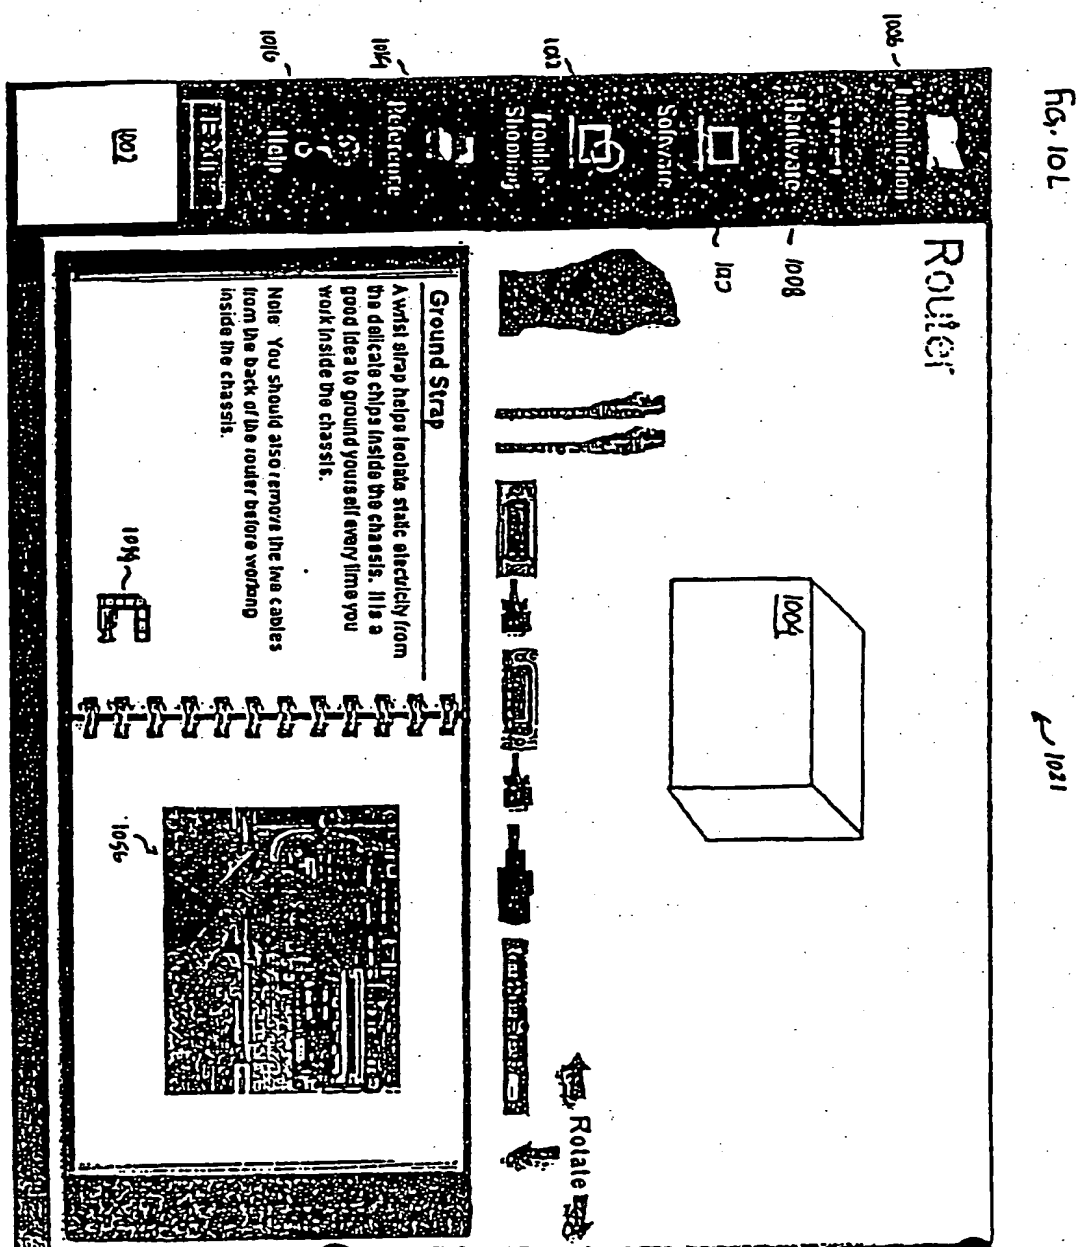

1274-0002

Fig. 10N

1002
Help
Reference
Trouble Shooting
Software
Hardware
Introduction

Quiz - 1

1026

List the seven layers of the OSI standard:

layer 1

layer 2

layer 3

layer 4

layer 5

layer 6

layer 7

1023

1745-0002

FIG. 10N

1015

1002

1004

1006

1008

1010

1012

1014

1016

1018

1020

1022

1024

1026

1028

1030

1032

1034

1036

1038

1040

1042

1044

1046

1048

1050

1052

1054

1056

1058

1060

1062

1064

1066

1068

1070

1072

1074

1076

1078

1080

1082

1084

1086

1088

1090

1092

1094

1096

1098

1100

1102

1104

1106

1108

1110

1112

1114

1116

1118

1120

1122

1124

1126

1128

1130

1132

1134

1136

1138

1140

1142

1144

1146

1148

1150

1152

1154

1156

1158

1160

1162

1164

1166

1168

1170

1172

1174

1176

1178

1180

1182

1184

1186

1188

1190

1192

1194

1196

1198

1200

1202

1204

1206

1208

1210

1212

1214

1216

1218

1220

1222

1224

1226

1228

1230

1232

1234

1236

1238

1240

1242

1244

1246

1248

1250

1252

1254

1256

1258

1260

1262

1264

1266

1268

1270

1272

1274

1276

1278

1280

1282

1284

1286

1288

1290

1292

1294

1296

1298

1300

1302

1304

1306

1308

1310

1312

1314

1316

1318

1320

1322

1324

1326

1328

1330

1332

1334

1336

1338

1340

1342

1344

1346

1348

1350

1352

1354

1356

1358

1360

1362

1364

1366

1368

1370

1372

1374

1376

1378

1380

1382

1384

1386

1388

1390

1392

1394

1396

1398

1400

1402

1404

1406

1408

1410

1412

1414

1416

1418

1420

1422

1424

1426

1428

1430

1432

1434

1436

1438

1440

1442

1444

1446

1448

1450

1452

1454

1456

1458

1460

1462

1464

1466

1468

1470

1472

1474

1476

1478

1480

1482

1484

1486

1488

1490

1492

1494

1496

1498

1500

1502

1504

1506

1508

1510

1512

1514

1516

1518

1520

1522

1524

1526

1528

1530

1532

1534

1536

1538

1540

1542

1544

1546

1548

1550

1552

1554

1556

1558

1560

1562

1564

1566

1568

1570

1572

1574

1576

1578

1580

1582

1584

1586

1588

1590

1592

1594

1596

1598

1600

1602

1604

1606

1608

1610

1612

1614

1616

1618

1620

1622

1624

1626

1628

1630

1632

1634

1636

1638

1640

1642

1644

1646

1648

1650

1652

1654

1656

1658

1660

1662

1664

1666

1668

1670

1672

1674

1676

1678

1680

1682

1684

1686

1688

1690

1692

1694

1696

1698

1700

1702

1704

1706

1708

1710

1712

1714

1716

1718

1720

1722

1724

1726

1728

1730

1732

1734

1736

1738

1740

1742

1744

1746

1748

1750

1752

1754

1756

1758

1760

1762

1764

1766

1768

1770

1772

1774

1776

1778

1780

1782

1784

1786

1788

1790

1792

1794

1796

1798

1800

1802

1804

1806

1808

1810

1812

1814

1816

1818

1820

1822

1824

1826

1828

1830

1832

1834

1836

1838

1840

1842

1844

1846

1848

1850

1852

1854

1856

1858

1860

1862

1864

1866

1868

1870

1872

1874

1876

1878

1880

1882

1884

1886

1888

1890

1892

1894

1896

1898

1900

1902

1904

1906

1908

1910

1912

1914

1916

1918

1920

1922

1924

1926

1928

1930

1932

1934

1936

1938

1940

1942

1944

1946

1948

1950

1952

1954

1956

1958

1960

1962

1964

1966

1968

1970

1972

1974

1976

1978

1980

1982

1984

1986

1988

1990

1992

1994

1996

1998

2000

2002

2004

2006

2008

2010

2012

2014

2016

2018

2020

2022

2024

2026

2028

2030

2032

2034

2036

2038

2040

2042

2044

2046

2048

2050

2052

2054

2056

2058

2060

2062

2064

2066

2068

2070

2072

2074

2076

2078

2080

2082

2084

2086

2088

2090

2092

2094

2096

2098

2100

2102

2104

2106

2108

2110

2112

2114

2116

2118

2120

2122

2124

2126

2128

2130

2132

2134

2136

2138

2140

2142

2144

2146

2148

2150

2152

2154

2156

2158

2160

2162

2164

2166

2168

2170

2172

2174

2176

2178

2180

2182

2184

2186

2188

2190

2192

2194

2196

2198

2200

2202

2204

2206

2208

2210

2212

2214

2216

2218

2220

2222

2224

2226

2228

2230

2232

2234

2236

2238

2240

2242

2244

2246

2248

2250

2252

2254

2256

2258

2260

2262

2264

2266

2268

2270

2272

2274

2276

2278

2280

2282

2284

2286

2288

2290

2292

2294

2296

2298

2300

2302

2304

2306

2308

2310

2312

2314

2316

2318

2320

2322

2324

2326

2328

2330

2332

2334

2336

2338

2340

2342

2344

2346

2348

2350

2352

2354

2356

2358

2360

2362

2364

2366

2368

2370

2372

2374

2376

2378

2380

2382

2384

2386

2388

2390

2392

2394

2396

2398

2400

2402

2404

2406

2408

2410

2412

2414

2416

2418

2420

2422

2424

2426

2428

2430

2432

2434

2436

2438

2440

2442

2444

2446

2448

2450

2452

2454

2456

2458

2460

2462

2464

2466

2468

2470

2472

2474

2476

2478

2480

2482

2484

2486

2488

2490

2492

2494

2496

2498

2500

2502

2504

2506

2508

2510

2512

2514

2516

2518

2520

2522

2524

2526

2528

2530

2532

2534

2536

2538

2540

2542

2544

2546

2548

2550

2552

2554

2556

2558

2560

2562

2564

2566

2568

2570

2572

2574

2576

2578

2580

2582

2584

2586

2588

2590

2592

2594

2596

2598

2600

2602

2604

2606

2608

2610

2612

2614

2616

2618

2620

2622

2624

2626

2628

2630

2632

2634

2636

2638

2640

2642

2644

2646

2648

2650

2652

2654

2656

2658

2660

2662

2664

2666

2668

2670

2672

2674

2676

2678

2680

2682

2684

2686

2688

2690

2692

2694

2696

2698

2700

2702

2704

2706

2708

2710

2712

2714

2716

2718

2720

2722

2724

2726

2728

2730

2732

2734

2736

2738

2740

2742

2744

2746

2748

2750

2752

2754

2756

2758

2760

2762

2764

2766

2768

2770

2772

2774

2776

2778

2780

2782

2784

2786

2788

2790

2792

2794

2796

2798

2800

2802

2804

2806

2808

2810

2812

2814

2816

2818

2820

2822

2824

2826

2828

2830

2832

2834

2836

2838

2840

2842

2844

2846

2848

2850

2852

2854

2856

2858

2860

2862

2864

2866

2868

2870

2872

2874

2876

2878

2880

2882

2884

2886

2888

2890

2892

2894

2896

2898

2900

2902

2904

2906

2908

2910

2912

2914

2916

2918

2920

2922

2924

2926

2928

2930

2932

2934

2936

2938

2940

2942

2944

2946

2948

2950

2952

2954

2956

2958

2960

2962

2964

2966

2968

2970

2972

2974

2976

2978

2980

2982

2984

2986

2988

2990

2992

2994

2996

2998

3000

3002

3004

3006

3008

3010

3012

3014

3016

3018

3020

3022

3024

3026

3028

3030

3032

3034

3036

3038

3040

3042

3044

3046

3048

3050

3052

3054

3056

3058

3060

3062

3064

3066

3068

3070

3072

3074

3076

3078

3080

3082

3084

3086

3088

3090

3092

3094

3096

3098

3100

3102

3104

3106

3108

3110

3112

3114

3116

3118

3120

3122

3124

3126

3128

3130

3132

3134

3136

3138

3140

3142

3144

3146

3148

3150

3152

3154

3156

3158

3160

3162

3164

3166

3168

3170

3172

3174

3176

3178

3180

3182

3184

3186

3188

3190

3192

3194

3196

3198

3200

3202

3204

3206

3208

3210

3212

3214

3216

3218

3220

3222

3224

3226

3228

3230

3232

3234

3236

3238

3240

3242

3244

3246

3248

3250

3252

3254

3256

3258

3260

3262

3264

3266

3268

3270

3272

3274

3276

3278

3280

3282

3284

3286

3288

3290

3292

3294

3296

3298

3300

3302

3304

3306

3308

3310

3312

3314

3316

3318

3320

3322

3324

3326

3328

3330

3332

3334

3336

3338

3340

3342

3344

3346

3348

3350

3352

3354

3356

3358

3360

3362

3364

3366

3368

3370

3372

3374

3376

3378

3380

3382

3384

3386

3388

3390

3392

3394

3396

3398

3400

3402

3404

3406

3408

3410

3412

34

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 May 2001 (17.05.2001)

PCT

(10) International Publication Number
WO 01/35187 A2

(51) International Patent Classification⁷: G06F
(21) International Application Number: PCT/US00/30879
(22) International Filing Date:
9 November 2000 (09.11.2000)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
09/436,553 9 November 1999 (09.11.1999) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: MCI WORLD COM, INC. [US/US]; 515 East
Armitage Street, Jackson, MS 39201 (US).

Published:

— without international search report and to be republished
upon receipt of that report

(72) Inventors: WALL, Robert, S.; 1409 Marlboro Lane,
Richardson, TX 75082 (US). WARNER, Donald, R.;
1006 Meadow Lane, Sachse, TX 75048 (US). CLOSSEN,
Jackie, R.; 2421 Midnight Circle, Plano, TX 75093
(US). DOGGETT, Patrick, J.; 816 Thackeray Lane,
Pflugerville, TX 78660 (US).

(48) Date of publication of this corrected version:
16 May 2002

(15) Information about Correction:
see PCT Gazette No. 20/2002 of 16 May 2002, Section II

(74) Agents: DIGIGLIO, Frank, S. et al.; Scully, Scott, Mur-
phy & Presser, 400 Garden City Plaza, Garden City, NY
11530 (US).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

WO 01/35187 A2

(54) Title: STATE TRANSITION SYSTEM AND METHOD IN INTERACTIVE COMPUTER-BASED TRAINING

(57) Abstract: An interactive computer-based training (ICBT) system operable over a computer network for training users. The ICBT system is provided with interdependant, state-machine-based hardware and software simulators for emulating hardware and software functionality associated with a piece of equipment on which the users are to receive interactive training. The state transition method effectuated in a computer-readable memory system includes the steps of: identifying a current state of the state machine wherein a transition is to be effectuated; determining if there is a state immediately prior to the current state, and if so, determining whether there is a dependency of the current state on the immediately prior state, the dependency being characterized as a first order dependency; inferring a reference value associated with the current state based on the first order dependency; and determining a future state of the state machine based on the inferred reference value.

**STATE TRANSITION SYSTEM AND METHOD IN INTERACTIVE
COMPUTER-BASED TRAINING**

5

CROSS-REFERENCE TO RELATED APPLICATIONS

This application discloses subject matter related to the subject matter disclosed in the following co-assigned patent application: "Interactive Computer-Based Training System and Method," filed _____ Serial No. _____ (Attorney Docket Number RIC-98-004), in the name of : Robert S. Wall, Don Warner, and Jackie R. Clossen.

10

BACKGROUND

15

Technical Field of the Invention

20

The present invention relates generally to electronic tutoring systems and methods, and more particularly, to an interactive computer-based training (ICBT) system and method operable over an Internet Protocol (IP)-based public computer network such as the Internet, a corporate Intranet, and the like.

Description of Related Art

25

Maintaining a skilled and innovative work force has always been important for businesses that strive to attain a competitive edge in the marketplace. Companies and organizations have come to recognize the value of intelligent and energetic people whose chief asset is their ability and desire to learn. The training opportunities presented in today's information age have increased with the advent of new technologies, creating an even broader range of tutoring services available to consumers.

30

The need for well-trained individuals is even more acute in technology-based businesses such as, for example, the telecommunications industry. Service providers in this industry operate and maintain vast telecommunications networks

covering huge geographic areas. These networks, formed by interconnecting an immense array of diverse and often highly complex pieces of equipment, pose enormous challenges to field technicians whose responsibilities typically include installation, repair and maintenance of network equipment at network facilities and remote customer sites, and troubleshooting service calls night and day, seven-days-a-week.

The service calls often involve routine as well as urgent trouble calls to make repairs that will enable the equipment, often purchased from third-party vendors, to continue functioning for the customer. Clearly, providing proper training to such field technical personnel and other technical/non-technical personnel on a broad assortment of network equipment is highly critical in order to be able to reduce the downtime associated with failed or poorly functioning equipment.

One of the conventional methods to impart appropriate technological information on an "as needed" basis to field technicians is to provide a centralized technical staff to answer questions the technicians may have concerning specific network equipment. This solution is costly. Support personnel may have to answer the same question for a number of field technicians. In addition, support personnel typically cannot provide systematic training that is needed, but rather provide "fire-fighting" type training to get a technician through a particular problem. This will not provide the technician a comprehensive understanding of the network equipment he or she is required to handle.

Another conventional method of providing instruction is by way of classroom training at a centralized location. However, this method is also highly disadvantageous. Such training is limited in classroom size and often very expensive in terms of field technicians' time and the actual monetary cost involved. Further, this problem is compounded by the fact that frequent equipment updates require continual re-training of the technicians in order for them to stay current and/or competent.

Another limitation of classroom training is that because of the disparity in proficiency levels of various technicians, training classes do not provide an appropriate level of training for every technician. Since such classes cannot be tailored to every individual's proficiency level, each technician may receive the entire training

course involving complex subject matter. As a result, many technicians may feel overwhelmed while some may receive training they do not need.

Computer-based training (CBT) methods alleviate some of the deficiencies of the conventional solutions set forth hereinabove. However, the existing CBT solutions are not without drawbacks of their own. First, although courseware designed for CBT sessions is typically provided to be self-paced, flexibility in selecting different lessons or re-arranging the order of lessons plans is rather limited. For example, because the courseware is typically built around a pre-arranged set of lessons, the user cannot go from one lesson to another without first completing a previously-required lesson plan. Accordingly, such lack of flexibility renders the current CBT schemes a poor choice for effectively presenting "real-world" training with a self-paced multi-path flow. Furthermore, these solutions do not provide a scheme for evaluating the amount of training each individual end-user (e.g., a technician) needs in order to bring the individual up to a predetermined level of proficiency.

In addition, the existing CBT solutions are not optimized for providing adequate levels of instruction on complicated equipment having tightly integrated hardware and software modules and sub-modules. Those of ordinary skill in the art should readily appreciate that lack of appropriate behavioral models of the equipment with sufficient degree of realistic complexity renders the resultant CBT sessions rather insufficient for providing high quality training.

SUMMARY

Accordingly, the present invention provides an interactive computer-based training (ICBT) system operable over a computer network for training users that advantageously overcomes these and other deficiencies and shortcomings of the prior art set forth hereinabove. The ICBT system is provided with inter-dependent, state-machine-based hardware and software simulators for emulating hardware and software functionality associated with a piece of equipment on which the users are to receive interactive training. The state transition method includes the steps of: identifying a current state of the state machine wherein a transition is to be effectuated; determining if there is a state immediately prior to the current state, and if so, determining whether there is a dependency of the current state on the immediately prior state, the dependency being characterized as a first order dependency; inferring a reference value associated with the current state based on the first order dependency; and determining a future state of the state machine based on the inferred reference value.

In further detail, the ICBT system comprises a hardware simulator based on a state machine engine for emulating one or more hardware states associated with the equipment. Also included is a software simulator that is inter-dependent on the hardware simulator for accurately emulating the software functionality of the equipment. The software simulator is provided as a command inference engine that allows the users to interactively interrogate the emulated equipment for its software functionality commands. One or more independently selectable learning modules, each including one or more lesson plans related to the hardware and software functionality of the emulated piece of equipment, are also included. The learning modules are provided to be inter-dependently associated with the hardware and software simulators of the equipment. A user interface is included for selecting one or more learning modules in addition to effectuating inputs from the users to change the hardware and software configurations and simulators of the equipment.

In another aspect, the present disclosure provides an interactive CBT method for training users on equipment having hardware and software functionality. The method provides for simulating the hardware and software functionality of the equipment by employing inter-dependent state machines wherein state transitions are

based on tracking prior dependencies and drawing inferences therefrom. One or more independently selectable learning modules are provided in the method, wherein each module includes lesson plans related to the hardware and software functionalities of the equipment. Inputs are provided by the users to effectuate different hardware and software configurations of the equipment. Thereafter, configuration-dependent learning modules may be selected based on the different hardware and software configurations.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention may be had by reference to the following Detailed Description when taken in conjunction with the accompanying drawings wherein:

FIG. 1 (Prior Art) depicts a flow diagram of an exemplary conventional CBT method;

FIG. 2 depicts a functional block diagram of a presently preferred exemplary embodiment of an on-line interactive CBT (ICBT) system provided in accordance with the teachings of the present invention;

FIG. 3 is a functional block diagram illustrating the inter-dependent modular architecture of the ICBT system of the present invention;

FIG. 4 depicts a presently preferred exemplary embodiment of the inter-dependent modular ICBT system;

FIG. 5 depicts a state transition scheme used in implementing a simulator engine for emulating hardware and software components of a device for which an ICBT system is provided in accordance with the teachings of the present invention;

FIG. 6 is a flow diagram of the state transition scheme of the present invention;

FIG. 7 illustrates a presently preferred exemplary embodiment of a state transition diagram for use with an ICBT system implemented for a router device;

FIG. 8 is a flow diagram of a test-taking process provided in the ICBT system of the present invention;

FIG. 9 depicts a flow diagram of an ICBT session using an adaptive-learning troubleshooting module provided in accordance with the teachings of the present invention;

FIGS. 10A through 10N are exemplary screen shots of a presently preferred ICBT system implemented for a router; and

FIG. 11 is an exemplary screen shot of a presently preferred ICBT system implemented for a switch.

5 **DETAILED DESCRIPTION OF THE DRAWINGS**

In the drawings, like or similar elements are designated with identical reference numerals throughout the several views, and the various elements depicted are not necessarily drawn to scale. Referring now to FIG. 1, depicted therein is a simplified flow diagram of an exemplary conventional CBT method for presenting
10 selected courseware to an end-user. The conventional CBT method is generally provided as a series of discrete lesson plans with a pre-defined order, i.e., a beginning, middle and an end. In actual operation, such a method typically displays a series of user interface screens for sequentially presenting the lesson plans to the end-user, for example, a field dispatch technician or an employee/trainee at a facility. The entire
15 courseware may comprise a predetermined number of lessons or lesson plans, and the end-user cannot typically change the order of the lessons being presented. Accordingly, upon starting or accessing the CBT courseware (step 102), the end-user goes through taking the lesson plans in the order they are presented (steps 104 through 108), until a determination is made as to whether the end-user wants to continue with
20 any additional lessons (decision block 110). If so, the additional lesson plan or plans may then be presented (step 112) for the end-user's benefit. On the other hand, should the end-user decide to quit the CBT session, option to deactivate and/or finish the session is generally available (step 114).

It should be readily appreciated by those of ordinary skill in the art that while a
25 uni-linear CBT method such as one set forth in the foregoing is relatively easy to design, implement and use, and may overcome the drawbacks of a classroom-based training scheme, there still exist several deficiencies and disadvantages in the conventional CBT methods as set forth in the Background section of the present patent application.

30 FIG. 2 depicts a functional block diagram of a presently preferred exemplary embodiment of an on-line interactive CBT (ICBT) or Web-based training

(WBT) system 200 provided in accordance with the teachings of the present invention. Preferably, the courseware of the ICBT system 200 is provided as part of a server-based multimedia application package 206 running on one or more servers for example, server 204, that are connected to a computer network 202 such as the

5 Internet, Intranet, et cetera. A client computer 208 (e.g., a laptop computer and the like) may preferably be used for accessing the courseware on an "as-needed" basis upon effectuating suitable authentication and log-on procedures. A graphic user interface 210 provided with the client computer 208 aids the end-user for interacting with the courseware 206. Preferably, the end-user, who may be a field technician

10 working at a remote site, can access the courseware on-line and obtain interactive tutoring or training on a piece of equipment that the end-user is dispatched to install, repair, maintain, or troubleshoot a service call at the remote site.

In accordance with the teachings of the present invention, the courseware of the ICBT system is provided with an inter-dependent modular architecture for

15 facilitating maximum user flexibility. As will be described in greater detail hereinbelow, both hardware and software functionality of the equipment for which the courseware is designed are modeled as inter-dependent state machines that allow transitions via multiple paths based on state dependency and reference value inferences. Furthermore, the courseware is preferably provided as an inter-dependent

20 collection of various hardware and software lesson plans, test/quiz sessions, troubleshooting menus, on-line help modules, and multimedia presentations (e.g., video clips, photographs, et cetera), wherein the end-user is capable of selecting any lesson plan at will or executing only a portion of a training session at any point in the courseware depending upon the need.

25 FIG. 3 is a functional block diagram illustrating the inter-dependent modular architecture 300 of an exemplary ICBT system. A hardware simulator 302 is provided for emulating the hardware functionality of a component or device. A state machine engine forms the basis for the hardware simulator 302 wherein the sub-components of the device are characterized and the states in which the device may

30 exist, based upon the conditions of the sub-components, are defined. For example, various connectors, switches, cables, input/output (I/O) port configurations, power-on

conditions, et cetera, of a device are abstracted and assigned logic values based on their states or conditions such as ON, OFF, specific values, connections made or not made, et cetera.

5 A software simulator 304 is provided for emulating the software functionality, or a subset thereof, of the device. A suitable inter-dependent state machine engine also forms the basis for the device software simulator 304. The various states of the hardware and software state machine engines are provided to be inter-dependent and, accordingly, affect the respective state transitions appropriately in order to emulate the device functionality substantially accurately and completely.

10 One or more learning modules 306 are provided as part of the ICBT system, preferably including a plurality of self-contained multimedia lesson plans, on-line help screens, troubleshooting modules, test/quiz portions, appropriate technology background information, glossaries, et cetera. Preferably, the components of the learning modules are organized in reference to the various hardware and software
15 portions of the abstracted device and are appropriately associated with the hardware and software simulators of the ICBT system.

A graphic user interface 210 facilitates the end-user to access and interact with the various modules of the ICBT system. Using the interface 210, the end-user can manipulate the various abstracted sub-components of the hardware simulator 302 as
20 part of a lesson plan. For example, the end-user may turn on or off various switches, make connections, turn on power to the device, et cetera, by effectuating an appropriate pointing device (e.g., a mouse) on the icons of the interface 210. Also, various software commands for the device may be entered through a software command interface portion of the user interface 210. Further, the user interface 210
25 preferably comprises appropriate display windows or dialog boxes to help the end-user navigate through the various multimedia teaching/training aids, testing and evaluation modules, etc.

Referring now to FIG. 4, depicted therein is a presently preferred exemplary embodiment of the inter-dependent modular architecture 400 of an ICBT system
30 provided in accordance with the teachings of the present invention. From a starting stage 402, the end-user can independently interact with a tutorial or lesson plan

module 404, a hardware simulator 406, a software simulator 408, a reference module 410, or a troubleshooting module 412. As described in the foregoing, the hardware and software simulators of the modular architecture 400 are underpinned by their respective state machine engines. The hardware simulator 406 is associated with its
5 lesson module 420 and the state machine engine 418. Similarly, the software simulator 408 is also associated with its lesson module 416 and a command inference engine 414 provided as the software state machine. The reference module 410 is also provided to be independently accessible to the end-user and is preferably coupled to the troubleshooting module 412.

10 In accordance with the teachings of the present invention, a problem identification module 422 preferably maintains a personal profile for the end-user and provides a list of most common causes of a particular error or problem encountered. For example, the list may include "Top 10" causes for the end-user with respect to a specific problem, thereby narrowing and personalizing the problem identification
15 process. It should be appreciated by those of ordinary skill in the art that the personalized problem identification process provided herein substantially expedites the troubleshooting tasks and, accordingly, reduces equipment downtime in the field.

FIG. 5 depicts a state transition scheme 500 used in implementing a simulator engine for emulating hardware and software components of a device. In accordance
20 with the teachings of the present invention, state transitions are provided to be inter-dependent upon previous states and the conditions thereat. Further, such inter-dependency may extend beyond the state that are immediately prior to a current state. In other words, state transitions are preferably based upon tracking the dependencies not only with respect to the immediately prior states, but also their previous
25 dependencies as well. In addition, the dependencies may be direct or indirect, based upon whether a logic condition associated with a state is alterable regardless of a previous state's condition, although a specific value of the previous state's condition may be necessary for a more realistic simulation. It should be readily appreciated by those of ordinary skill in the art upon reference hereto that such a "multi-level" inter-
30 dependency scheme in a state machine provides for a robust and fine-grained behavioral model of the device being emulated.

Continuing to refer to FIG. 5, a current state 502 is shown to have dependencies on a plurality of states that are immediately prior to it, for example, state 504-1 through state 504-L. These dependencies may be referred to as the first-order dependencies with respect to the current state 502. Also, the immediately prior states may likewise be denoted as the first-order states. As exemplified in the FIG., the first-order dependencies may comprise both direct (e.g., dependency path 508) and indirect (e.g., dependency path 510) dependencies. Also, the first-order previous state 504-1 is, in turn, exemplified with a direct dependency path 522 (a second-order direct dependency with respect to the current state 502) as well as an indirect dependency path 524 (a second-order indirect dependency for the current state 502).

The current state 502 may transition into any of the first-order next states, for example, state 514-1 through state 514-K, based upon tracking the dependencies as set forth above. Also, the logic conditions of a next state may give rise to a direct as well as an indirect dependency path to another, second-order, next state. For example, the first-order next state 514-2 generates a direct dependency path 518 to a second-order next state 516-1 and indirect dependency path 520 to another second-order next state 516-2.

Preferably, an Artificial Intelligence (AI)-based inference engine is used for keeping track of the state logics, dependencies and allowable transitions in the state machines of the present invention. FIG. 6 depicts a flow diagram of the state transition scheme 500 described hereinabove. After identifying or ascertaining the present state (step 602), the inference engine determines its dependent state or states and characterizes the dependencies thereof (step 604). Thereafter, one or more reference values associated with the state (or its logic parameters) are inferred (step 606). Typically, the reference values may comprise a set: {NULL; 0; or a specific value}. The values of the references may then be used, in one exemplary embodiment, for determining state transitions (i.e., future states) of the hardware or software state machine's present state.

FIG. 7 illustrates a presently preferred exemplary embodiment of a state transition diagram for use with an ICBT system implemented for a router device. For the sake of simplicity, solid lines are used for denoting both direct and indirect

dependencies therein. Also, broken lines are shown where a state dependency is an OR condition of its prior states. Eight hardware state exemplified for the router device are described immediately hereinbelow:

5 STATE 1 (POWER CORD) 702: The Power Cord state is true if the power cord of the router is plugged into the device; otherwise it is false. The end-user activates the Power Cord state by mouse-dragging a suitable cord icon from a supplies list provide with the GUI to the AC power port of the device. No prior dependencies are provided for this state.

10 STATE 2 (POWER SWITCH) 704: The Power Switch state is true if the power switch of the router is in the ON position and the power cord is plugged in. Otherwise, the logic value of the state is false. The power switch of the device is preferably provided as a toggle switch between ON and OFF positions selectable by mouse-clicks. The end-user activates this state by mouse-clicking on the final
15 dependency of the foregoing two states of the router device (i.e., the order of activating the power switch or the power cord of the device is irrelevant for the purpose of activating State 2). For State 2 to be true, it is dependent on State 1 being true. However, if the power is not plugged in, the switch can still be turned ON or OFF, regardless of the power cord connection. Accordingly, State 2 has an indirect first-order dependency on State 1.

20 STATE 3 (CONSOLE CONNECTOR) 706: The Console Connector state is true if the console connector wire is plugged into the console connector port of the router device; otherwise it is false. The end-user activates this state by mouse-dragging the console cable connector icon from the supplies list to the console port of the device. No dependencies are provided for the Console Connector state 706.

25 STATE 4 (SERIAL CONNECTOR) 708: The Serial Connector state is true if the serial connector wire is plugged into the serial connector port of the router device; otherwise it is false. The end-user effectuates this state by mouse-dragging the serial connector cable icon from the supplies list to the serial connector port of the device. Again, no dependencies are provided for the Serial Connector state 708.

30 STATE 5 (TERMINAL "BOOT" SCREEN) 710: The Terminal "Boot" Screen state is true if the power switch is in the ON position, the power cord is plugged in,

and the console connector is connected. The end-user activates this state by mouse-clicking on the final dependency of the three foregoing states of the router device (i.e., the activation order of the previous states does not matter). The Terminal "Boot" Screen is then displayed when the state is true (in the software emulator). When the hardware emulator of the device is being viewed, a green blinking connection light comes on when the state is true.

For State 5 to be true, it is dependent on State 1, State 2 and State 3 being true. If the power cord is not plugged in, the power switch can still be turned ON or OFF, but the router's terminal boot screen will not appear on the display of the GUI. If the power cord is in, the power switch is ON and the console connector cable is not connected, the device's boot screen will not appear also. Further, if the power cord and the console connector are connected but the power switch is in the OFF position, again the boot screen will not appear. Accordingly, State 5 has a direct dependency on State 1, State 2 and State 3.

STATE 6 (POWER LIGHT ON) 712: The Power Light ON state is true if the power switch is in the ON position and the power cord is plugged in; otherwise it is false. The end-user verifies this state by mouse-clicking on the final dependency of the foregoing two states of the router device. When the device hardware emulator is being viewed, a green POWER light comes on when the state is true.

For State 6 to be true, it is dependent on State 1 being true and State 2 being true. If the power cord is not plugged in, the power switch can be toggled between the ON and OFF positions, but no light comes on. Thus, State 6 has a direct dependency on State 1 and State 2.

STATE 7 (SERIAL CONNECTION LIGHT ON) 714: The Serial Connection Light ON state is true if the power switch is in the ON position, the power cord is plugged in, and the serial connector wire is plugged into the serial connector port of the router device. Otherwise, it is false. The end-user verifies this state by mouse-clicking on the final dependency of the previous three states of the device and, again, a green blinking light comes on in the hardware emulator viewing when the state is true.

For State 7 to be true, it is dependent on State 1, State 2 and State 4 being true. If the power cord is not plugged in, the power switch can still be toggled between the

ON and OFF positions, but no serial connection light comes on. Also, if the power cord is in, the power switch is ON and the serial cable is not connected, the serial connection light does not come on. Finally, if the power cord is in, the power switch is OFF and the serial cable is connected, again the serial light does not come on. Thus,

5 State 7 has a direct dependency on State 1, State 2 and State 4.

STATE 8 (TERMINAL "NO CONNECTION" SCREEN) 716: The Terminal "No Connection" Screen state is true if either the power switch is in the OFF position, the power cord is not plugged in, or the console connector is not connected to the console port of the device. When the state is true, the Terminal "No Connection"

10 Screen is displayed in the software emulator. Mouse-clicking the power switch of the device produces a blinking light.

For State 8 to be true, it is dependent on either State 1 being false, State 2 being false, or State 3 being false. If the power cord is not plugged in, the power switch can still be toggled between the ON and OFF positions, and the "No

15 Connection" Screen remains visible. If the power cord is in, the power switch is ON and the console cable is not plugged in, the "No Connection" screen remains visible again. Finally, when the power cord is in, the power switch is OFF and the console cable is plugged in, the "No Connection" Screen still remains visible. Thus, State 8 has an indirect dependency on each of State 1, State 2 and State 3 being false, or any
20 combination thereof.

The hardware state model 700 described above is used for building inferences about the different states of the router hardware and software, and appropriate lesson plans and troubleshooting modules related to the state-dependent behavior of the router device. Because whether a particular software command or lesson plan can be
25 simulated or presented, either in the field or in a "virtual" classroom, may be dependent upon a specific combination of the hardware states of the device, the end-user is guided through appropriate hardware setup and configuration before such software simulations or lesson plans may be effectuated. Furthermore, when any errors arise during an ICBT session, invoking suitable troubleshooting module or modules is
30 also dependent upon the behavior of hardware and software states.

FIG. 8 depicts a flow diagram of an exemplary test-taking process or evaluation session provided as part of the ICBT system of the present invention. In a presently preferred exemplary embodiment, the ICBT simulator system may be launched from a remote computer (i.e., a client) that is connected via the Internet/Intranet to the server on which the system is executed. Those of ordinary skill in the art should readily understand that there is no limitation on the type of hardware or software platforms, whether the server or client, for effectuating the ICBT simulator system of the present invention. Any known or hitherto unknown hardware architectures and Operating Systems may be advantageously employed for the purposes of the present invention. Also, any known or hitherto unknown browser tools operable with IP-based networks may be used for accessing the server site via a suitable protocol, for example, the well-known Hyper-Text Transfer Protocol (HTTP).

Upon executing appropriate authentication procedures, the end-user is authorized to launch the ICBT simulator system (step 802) which may be optimized for a particular piece of equipment such as, for example, a network element (i.e., a router, brouter, or a bridge, et cetera). When a suitable GUI is presented, the end-user may activate one or more portions of the interface to initiate an ICBT session (step 804). By activating a test or quiz menu on the interface, the end-user can take a quiz on a particular topic related to the simulated equipment (step 806). Preferably, a "real-time" assessment of the quiz is done so that if the end-user fails the quiz (decision block 808), a menu of options may be presented from which the end-user can select a suitable option (step 810). For example, the option menu may include a link to an appropriate lesson plan, a relevant multimedia presentation (if available), or an option to re-take the quiz. On the other hand, upon successfully completing the quiz, the end-user may continue with other ICBT sessions (step 812) or may conclude the testing session. Further, because of the flexible modularity of the ICBT system of the present invention, the end user can elect to take additional lesson plans, launch related multimedia presentations, query on-line help modules, etc.

Referring now to FIG. 9, depicted therein is a flow diagram of an adaptive troubleshooting session provided in the ICBT system of the present invention. In this example after launching the ICBT simulator system (step 902) and activating the user

interface (step 904) as described hereinabove, the end-user initializes and configures the device in accordance with a lesson plan, learning module, etc. Thereafter, the end-user enters a command for effectuating a hardware, software, or firmware function of the emulated device. If an error is reported by the command inference engine of the ICBT simulator (decision 906), the end-user may activate an appropriate troubleshooting module (step 910). In accordance with the teachings of the present invention, the troubleshooting module maintains a personal profile for the end-user in terms of the end-user's prior configuration/installation settings, command usage, prior errors and causes therefor, et cetera, in a historical database. Based on this "intelligence," a list of most common causes that are likely to have caused the particular error is returned by the ICBT system (step 912). If the actual cause of the error is not on the list, a learning routine in the troubleshooting module is activated (step 914) so that the "new" cause is added to the personal profile of the end-user when the problem is subsequently identified and solved (step 916). In this manner, the personal profile of the end-user is adaptively updated, thereby reducing the time associated with troubleshooting in the field. Once again, because of the flexible modularity of the simulator system, the end-user has the option of continuing with the ICBT session in any appropriate manner, including session termination (step 908).

FIGS. 10A through 10N depict exemplary screen shots of a presently preferred ICBT system implemented for a router device. FIG. 11 is an exemplary screen shot of a presently preferred ICBT system implemented for a network switch. It is believed that the contents of these exemplary screen shots are self-explanatory and, accordingly, only some of the salient features are described in greater detail hereinbelow.

FIG. 10A illustrates an initial GUI screen 1000 for router installation. A main menu bar 1002 includes a plurality of icons exemplifying the inter-dependent modular architecture of the present invention. An INTRODUCTION icon 1006, HARDWARE icon 1008, SOFTWARE icon 1010, TROUBLE SHOOTING icon 1012, REFERENCE icon 1014 and a HELP icon 1016 are provided. An EXIT option 1038 allows the end-user to de-activate and/or terminate an ICBT session. As is well-known, the end-user can click on any of the main options by pointing an appropriate

input device (e.g., a mouse) on one of several icons of the menu bar 1002. A main display area 1036 may initially preferably illustrate a router 1004. Those of ordinary skill in the art will recognize that appropriate company logos, equipment manufacturer's identification, markings and/or logos, 3-D animated presentations, et
5 cetera, may also be included to enhance the interactive experience of the ICBT system.

FIG. 10B illustrates a screen shot 1001 associated with the INTRODUCTION icon 1006. The main display area 1036 preferably includes a text portion 1018 for presenting appropriate technology background information on routers. A plurality of graphics areas, e.g., graphics areas 1020A through 1020C, are also provided to
10 visually enhance the background information on the device being emulated.

FIG. 10C illustrates a hardware emulator screen shot 1003 associated with the HARDWARE icon 1008. A plurality of lesson plans are provided as a pull-down option menu 1022. FIG. 10D depicts a screen shot 1005 that is generated when one of these lesson plans is activated. The lesson plan screen shot 1005 preferably includes a
15 multimedia-enhanced device book portion 1028 which shows text information 1030 relating to the hardware plan selected, a graphics image 1032 for the relevant hardware component, and a video clip 1034 therefore. Also shown in the main display area 1036 is a hardware components area 1024 wherein an appropriate supplies list, e.g., connectors, cables, ports, straps, etc. are "iconized" for selection by the end-user.
20 The router 1004 is rotatable by manipulating a ROTATE arrow icon 1026 so that both the front-and back-sides of the router may be examined and used for appropriately connecting the several cables and connectors provided therewith.

FIG. 10E illustrates another exemplary hardware lesson screen shot 1007 for making the network connections, that is, for emulating the router connections within a
25 network. FIG. 10F exemplifies a terminal emulator screen shot 1009 which shows a pull-down menu 1040 for selecting from a plurality of software lessons.

FIG. 10G provides a software command reference screen shot 1011. The commands are preferably grouped in a COMMAND CATEGORIES list 1042. A scrollable dialog box 1044 provides the relevant commands that are selected from the
30 command category. Another scrollable dialog box 1046 provides the use, syntax and format of a particular command.

As shown in FIG. 10H, a reference manual is provided as a device book 1048, having the contents therein organized into several topics 1052, and is preferably provided to be activatable from the hardware emulator as exemplified in FIG. 10C. FIG. 10I illustrates a screen shot 1015 for power cable reference, with a graphics
5 image 1050 therefore. Similarly, FIG. 10J illustrates a screen shot 1017 for providing reference to the chassis, with a video clip 1054. Reference to the power switch of the router is exemplified in the screen shot 1019 depicted in FIG. 10K. Reference to a ground strap used by technicians while working on routers is exemplified in the screen shot 1021 shown in FIG. 10L.

10 FIG. 10M illustrates a screen shot 1023 for an exemplary quiz plan. An on-line glossary screen 1025 is illustrated in FIG. 10N. Preferably, the terms and acronyms included in the glossary are provided in a scrollable dialog box provide in the main display area 1036 of the GUI.

Whereas the GUI of the router simulator system described above is provided to
15 be more "icon-rich," a different "look and feel" is provided for the exemplary GUI screen shot 1100 of a presently preferred network switch simulator shown in Fig. 11. However, it should be understood that the underlying inter-dependent modular architecture that integrates hardware and software state transition schemes, lesson plans, troubleshooting modules is essentially similar to the router simulator
20 architecture, except for the necessary and appropriate switch-specific modifications. Accordingly, it should be appreciated that the modular ICBT system of the present invention may be provided for any piece of equipment that can be characterized in discrete states and components, and the "look and feel" of the user interface may be as variable as particular implementation may allow or require.

25 Based on the foregoing, it should be appreciated that the present invention advantageously provides a highly interactive CBT system that overcomes the deficiencies and shortcomings of the prior art in terms of ease of use, flexibility, and more "real-life" training necessary for effective job performance. Because the ICBT system of the present invention may be accessed via a computer network on a 24-
30 hour/seven-days-a-week basis as needed, no travel time or expense is needed to provide high quality training to a distributed work force.

In addition, it should be further appreciated that the equipment simulators of the ICBT system can be used as a reference tool as well as a training tool, thereby reducing or obviating the need for a centralized technical support staff. Also, by employing a suitable Web-based framing format, virtually an unlimited number of technicians can be trained at the same time at their own job stations, each taking only those sections or lesson plans suited to his or her current training session.

Further, it is believed that the operation and construction of the present invention will be apparent from the foregoing Detailed Description. While the method and system shown and described have been characterized as being preferred, it should be readily understood that various changes and modifications could be made therein without departing from the scope of the present invention as set forth in the following claims. For example, although the presently preferred exemplary embodiments of the present invention have been implemented using ToolBook, an application authoring package based on OpenScript language, it should be realized that the present invention may be practiced using any programming medium including, for example, one with appropriate dynamic link libraries (DLLs) coded in C or C++ language, etc. Also, whereas the teachings of the present invention have been particularly exemplified with a router device, it should be apparent as mentioned hereinabove that virtually any piece of equipment (e.g., customer premises equipment, switching equipment such as data, voice and multimedia switches, testing equipment, and the like) whose behavior can be simulated (i.e., modeled) using state machine transitions can be provided with a suitable ICBT system therefore. In addition, individual screen shots and dialog boxes have been provided by way of example only and should not be interpreted as providing limitations of any kind with respect to the teachings of the present invention. Clearly, the sequence or order of such screen shots and their contents may be presented in numerous permutations/combinations thereof. Accordingly, it should be clearly understood that these and other variations, substitutions, additions, rearrangements and modifications are contemplated to be within the ambit of the present invention whose scope is solely limited by the claims set forth below.

WHAT IS CLAIMED IS:

1. A state transition method for a state machine having a plurality of states effectuated in a computer-readable memory system, comprising the steps of;
5 identifying a current state of said state machine wherein a transition is to be effectuated;
determining if there is a state immediately prior to said current state, said state being a first order state, and if so, determining whether there is a dependency of said current state on said immediately prior state, said dependency being a first
10 order dependency;
inferring a reference value associated with said current state based on said first order dependency; and
determining a future state of said state machine based on said reference value.
15
2. The state transition method as set forth in claim 1, further comprising the step of determining if said first order dependency is a direct dependency.
3. The state transition method as set forth in claim 1, further comprising the step of determining if said first order dependency is an indirect dependency.
4. The state transition method as set forth in claim 1, further comprising the step
20 of;
determining if said immediately prior state has a dependency on a state prior thereto, said state being a second order state and said dependency on said second order state being a second order dependency; and
inferring said reference value associated with said current state based
25 on said first order dependency and said second order dependency.
5. The state transition method as set forth in claim 4, wherein said second order dependency comprises a direct dependency.
6. The state transition method as set forth in claim 4, wherein said second order dependency comprises an indirect dependency.
- 30 7. The state transition method as set forth in claim 1, wherein said reference value associated with said current state comprises a NULL value.

8. The state transition method as set forth in claim 1, wherein said reference value associated with said current state comprises a zero.
9. The state transition method as set forth in claim 1, wherein said reference value associated with said current state comprises a specific value.
- 5 10. The state transition method as set forth in claim 1, further comprising the steps of:
- determining if said current state has multiple orders of dependencies on a plurality of previous states; and
- inferring said reference value associated with said current state based
- 10 on said multiple orders of dependencies.
11. A state transition inference engine for a state machine having a plurality of states effectuated in a computer-readable memory system, comprising:
- means for identifying a current state of said state machine wherein a transition is to be effectuated;
- 15 means for determining whether there is a dependency of said current state on a state immediately prior to said current state, said dependency being a first order dependency;
- means for inferring a reference value associated with said current state based on said first order dependency; and
- 20 means for determining a future state of said state machine based on said reference value.
12. The state transition inference engine as set forth in claim 11, further comprising means for determining if said first order dependency is a direct dependency.
- 25 13. The state transition inference engine as set forth in claim 11, further comprising means for determining if said first order dependency is an indirect dependency.
14. A state machine for simulating hardware functionality of a router exemplified in an interactive computer-based training (CBT) system for training users, wherein
- 30 said state machine is effectuated in a computer-readable memory system, comprising;

a Power Cord state having a logic value of true when a power cord associated with said simulated router is connected a power port thereof;

a Power Switch state having a logic value of true if a power switch associated with said simulated router is in ON position and said power cord is
5 connected to said power port;

a Power Light state having a logic value of true if said power switch is in ON position and said power cord is connected to said power port;

a Console Connector state having a logic value of true if a console connector cable associated with said simulated router is plugged into a console
10 connector port thereof;

a Serial Connector state having a logic value of true if a serial connector cable associated with said simulated router is plugged into a serial connector port thereof;


a Serial Connection Light state having a logic value of true if said
15 power cord is plugged in, said power switch is in ON position and said serial connector cable is plugged into said serial connector port;

a Terminal Boot Screen state having a logic value of true if said power switch in ON position, said power cord is plugged in and said console connector cable is plugged into said console connector port of said simulated router; and

20 a Terminal No Connection Screen state having a logic value of true if at least one of the following conditions is true: said power switch is in OFF position, said power cord is not plugged in and said console connector cable is not plugged into said console connector port of said simulated router.

25

1/24

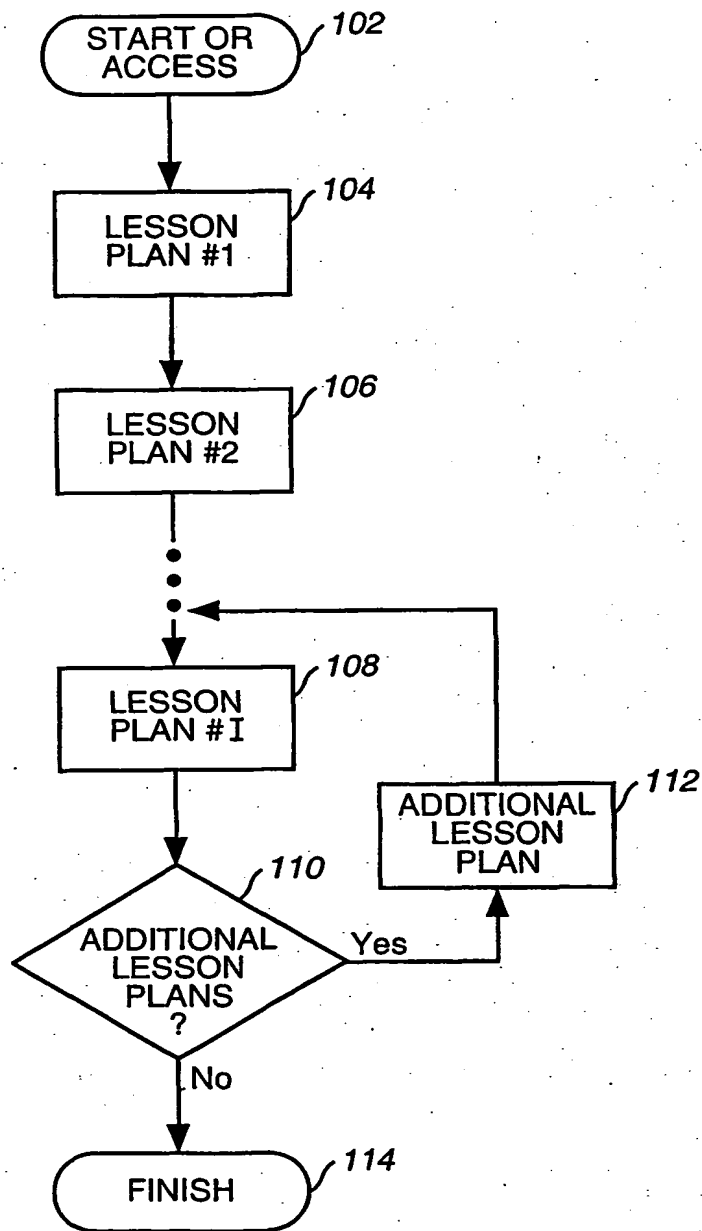

Prior Art
FIG. 1

2/24

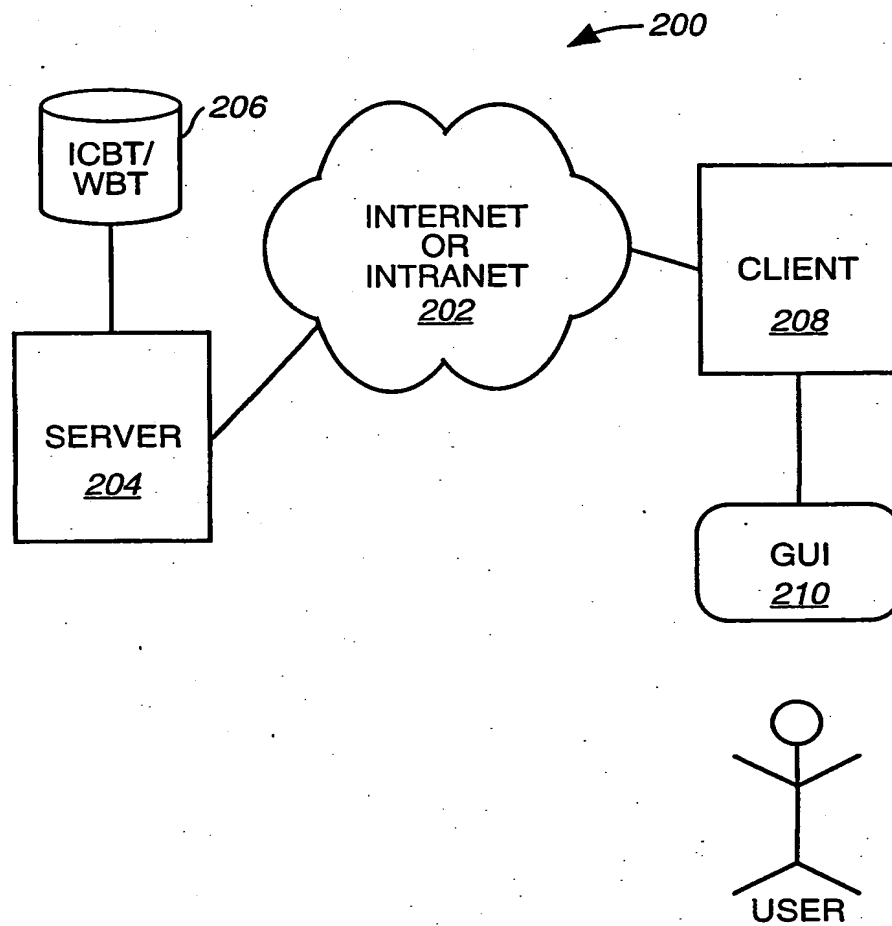


FIG. 2

3/24

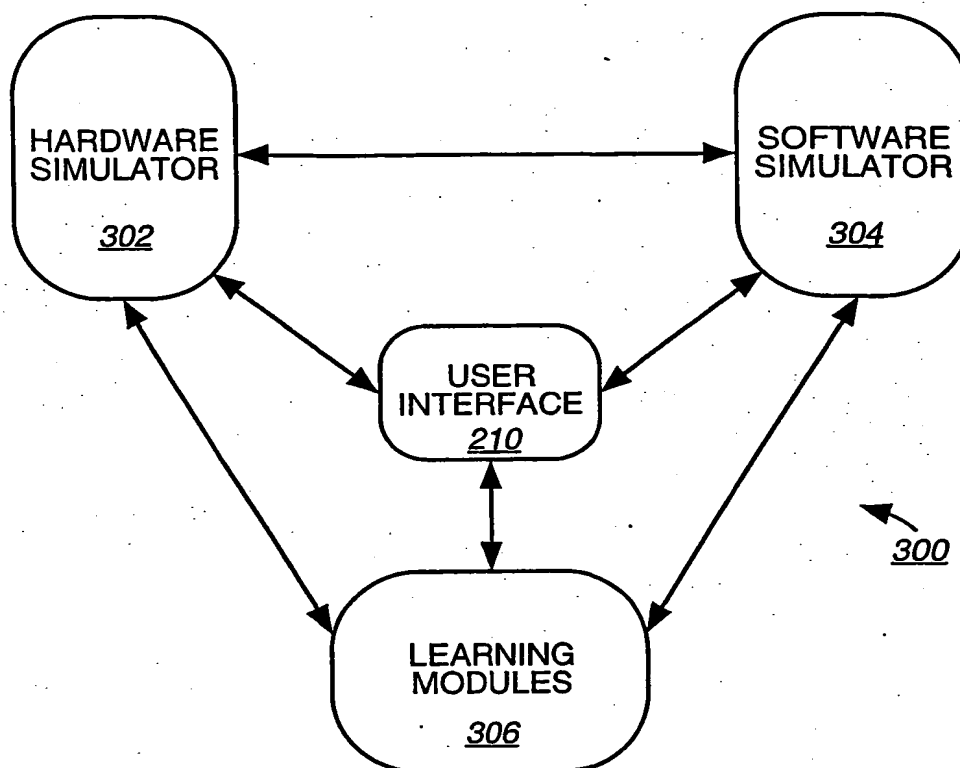


FIG. 3

4/24

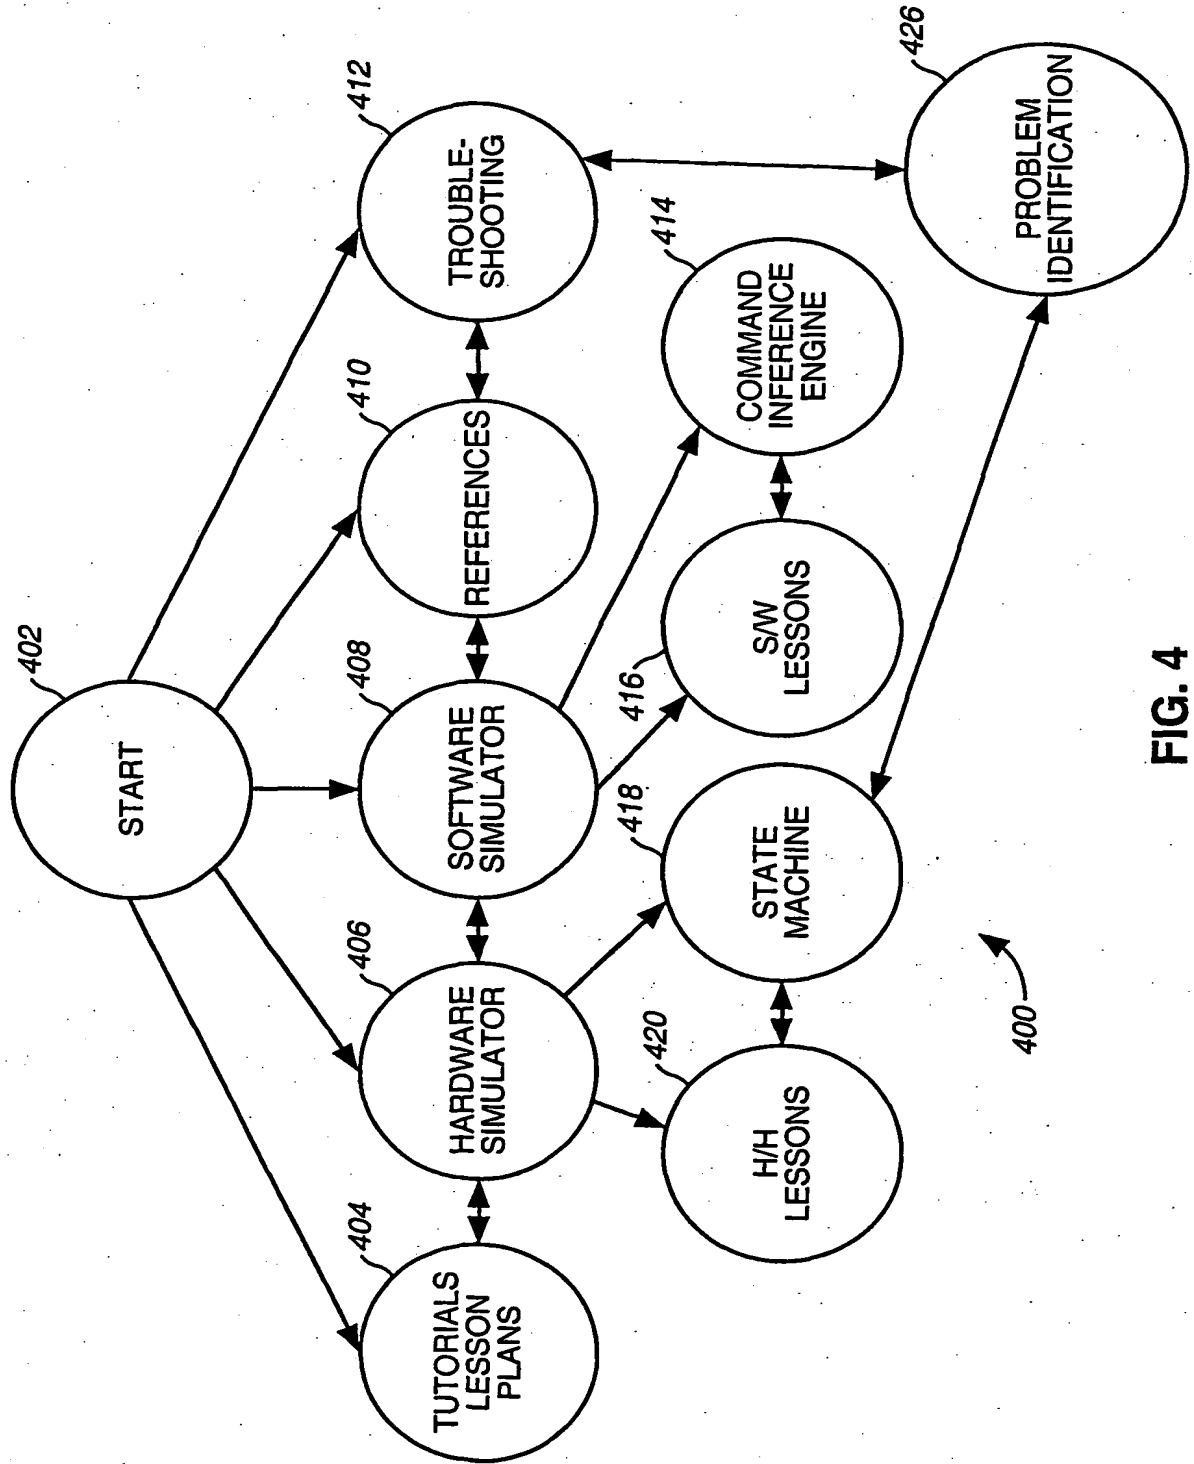


FIG. 4

5/24

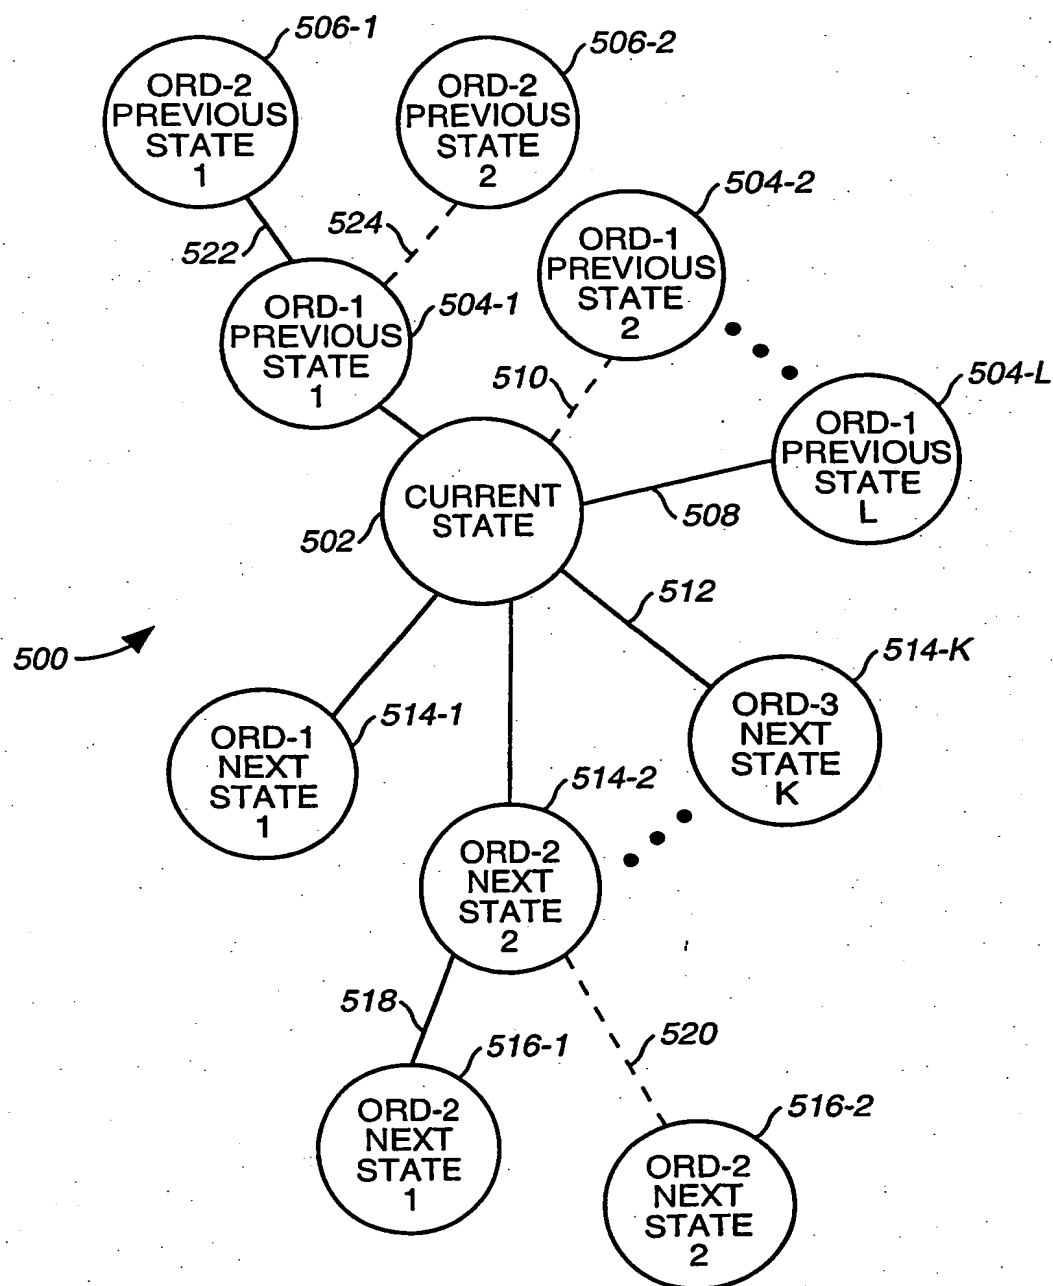


FIG. 5

6/24

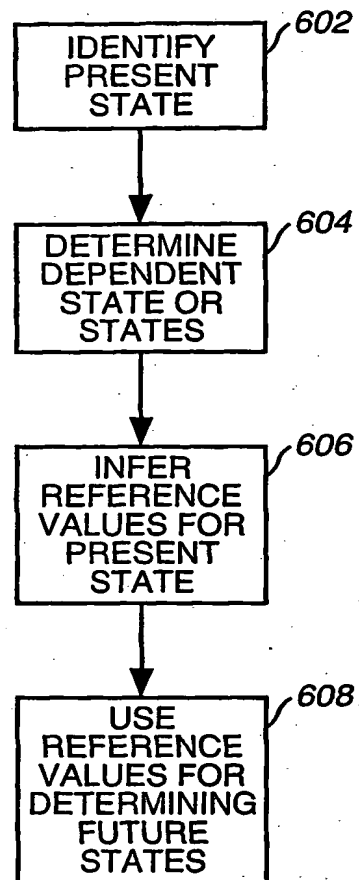


FIG. 6

7/24

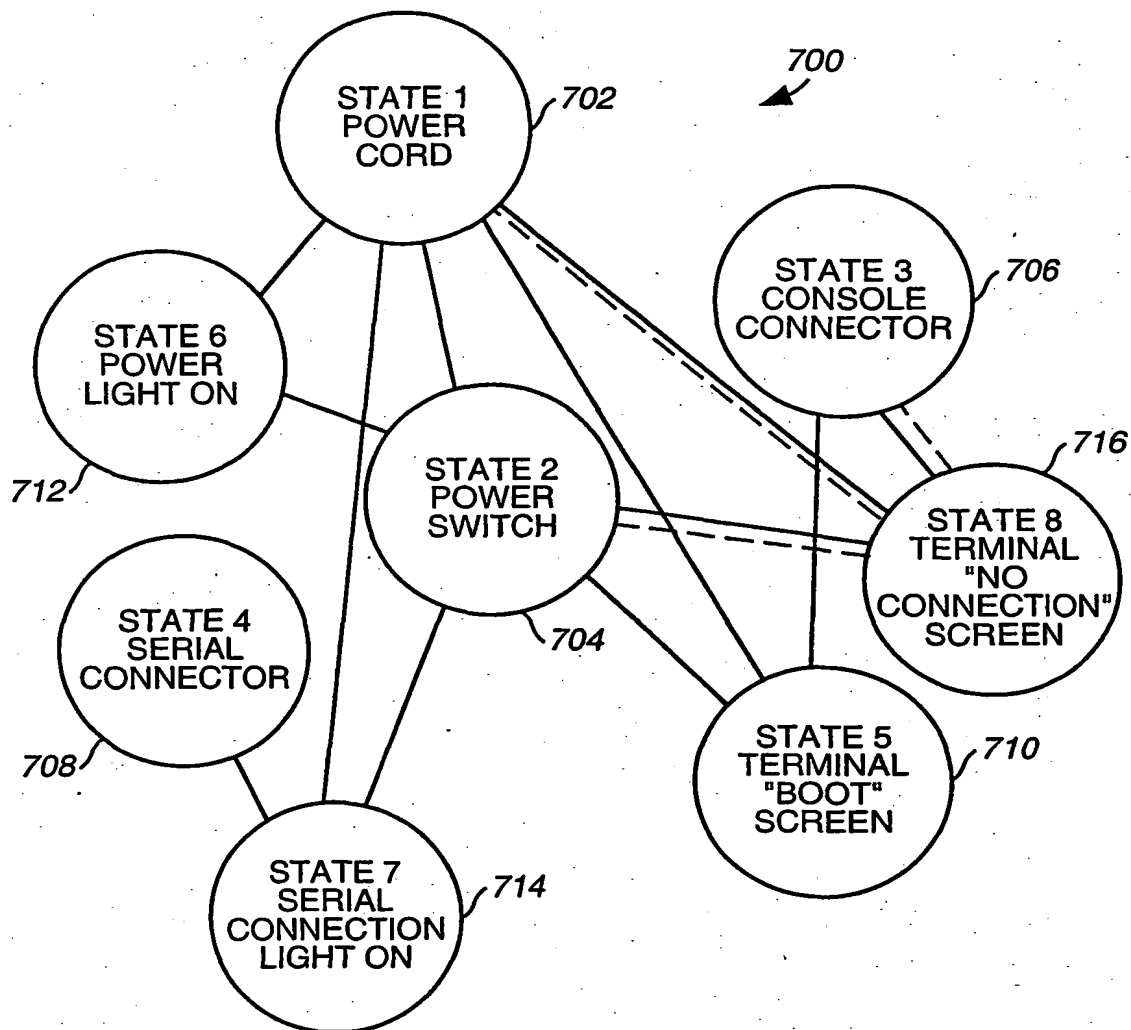


FIG. 7

8/24

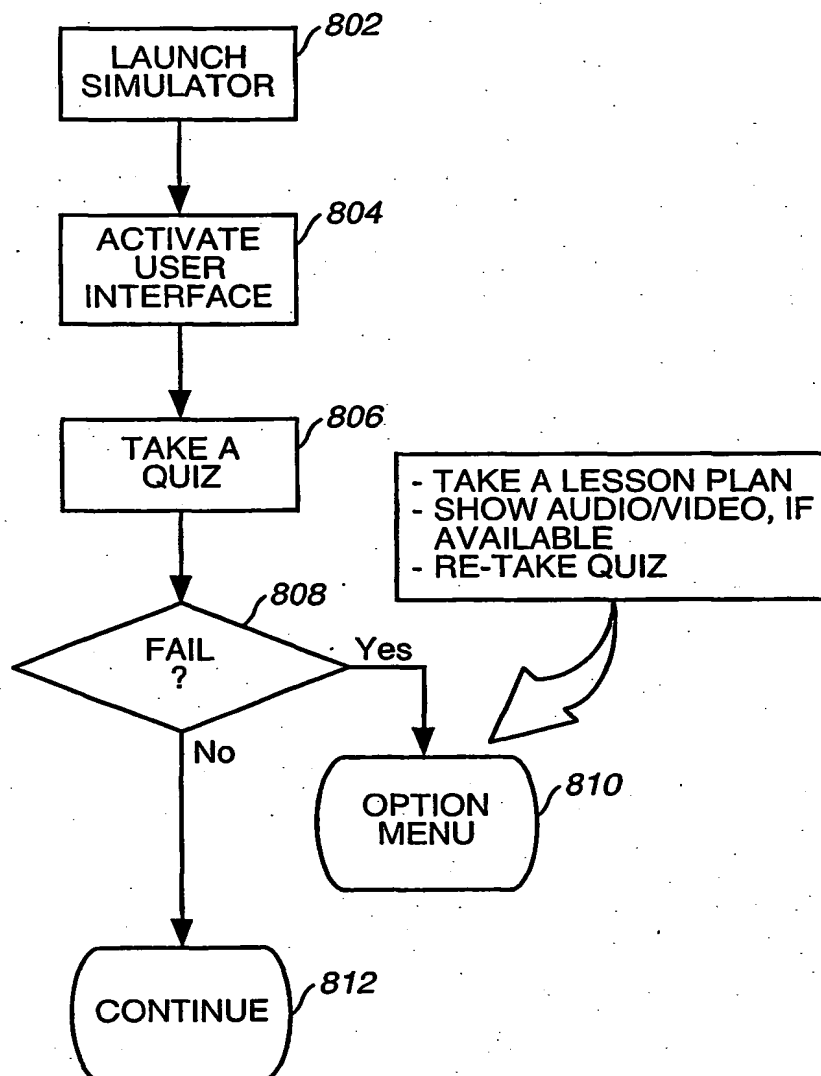


FIG. 8

9/24

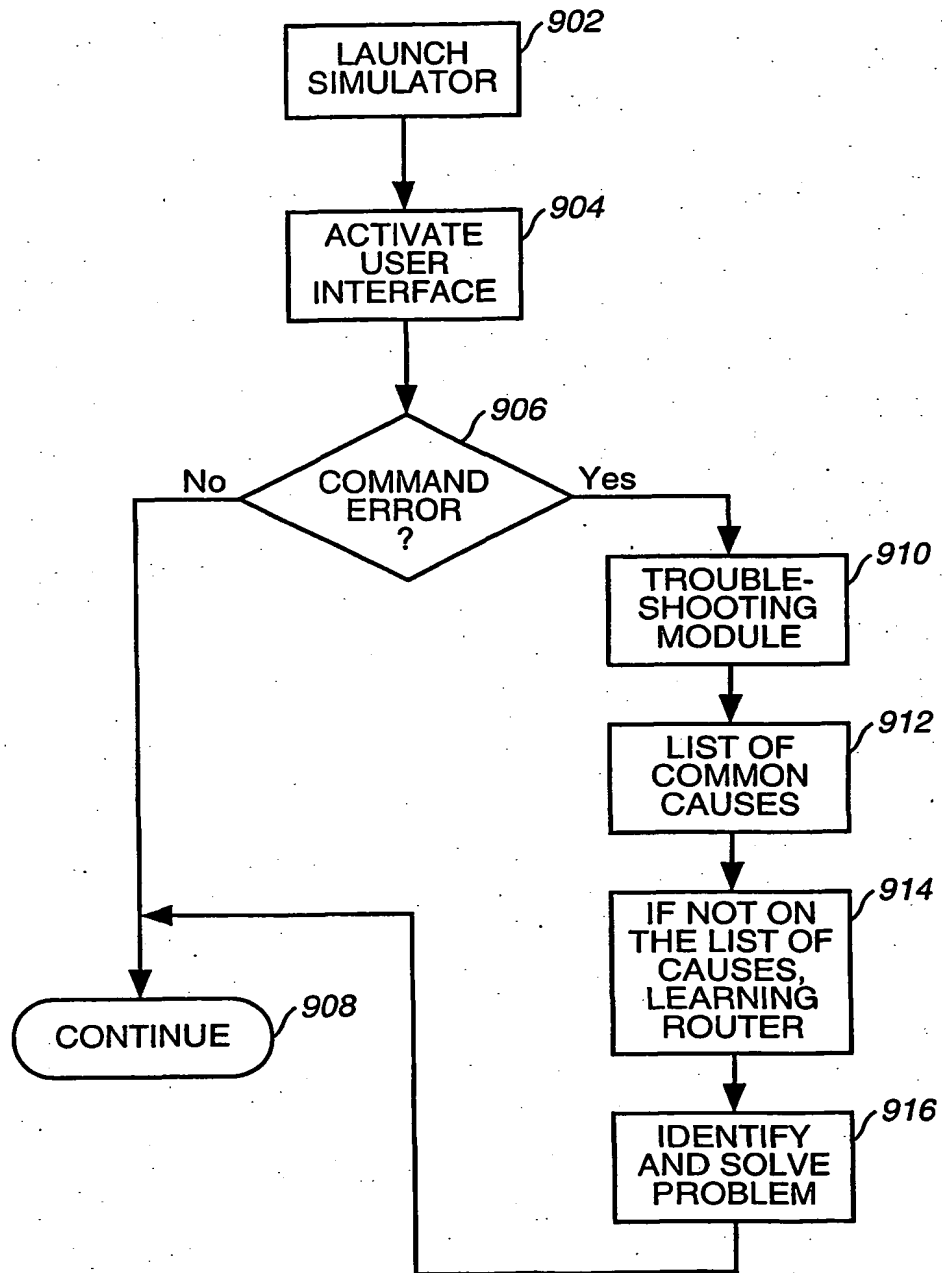


FIG. 9

10/24

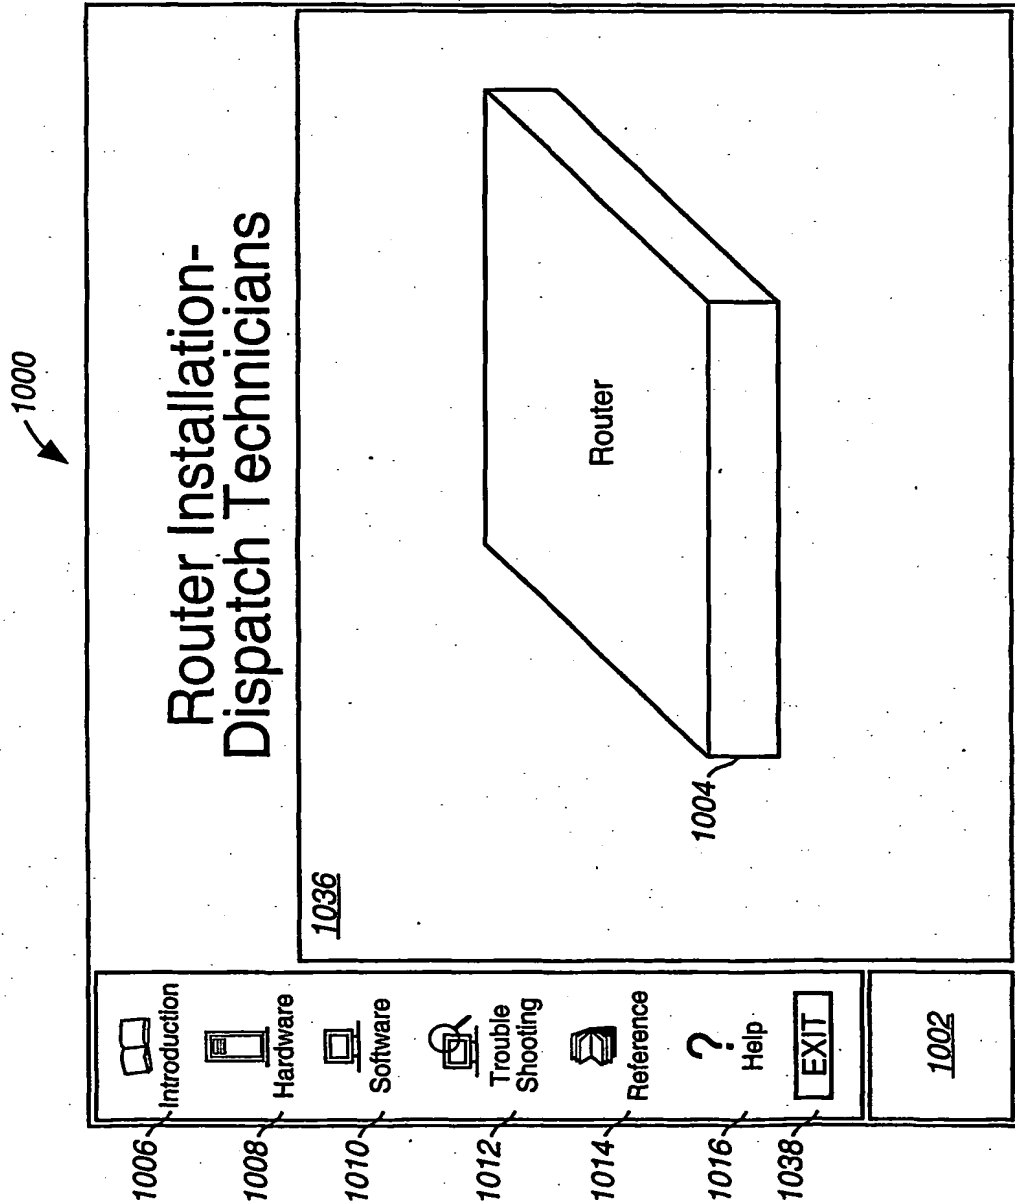


FIG. 10a

11/24

1001

Routers: An Introduction


1036

Routers are Layer 3 (Network) devices, responsible for routing and directing "packets" of electronic information. A router uses the Network Layer address of a packet to send it towards its destination. This is called logical addressing, and it's what primarily differentiates a router from a bridge, which uses physical addressing.

Routers, unlike bridges, recognize different sending protocols and apply the proper routing technique for each protocol. Routers can also select from various paths to minimize costs and avoid congestion.

Note, too, that routers utilize two different routing protocols. RIP-Routing Information Protocol-is based on the number of hops. OSPF-Open Shortest Path First-is based on class of service.

1020A

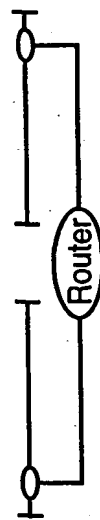

Next:
Introduction:

1020C

Application
Presentation
Session
Transport
Network
Data Link
Physical



Introduction



Hardware



Software



Trouble
Shooting



Reference



Help

EXIT

1002

FIG. 10b

12/24

1003

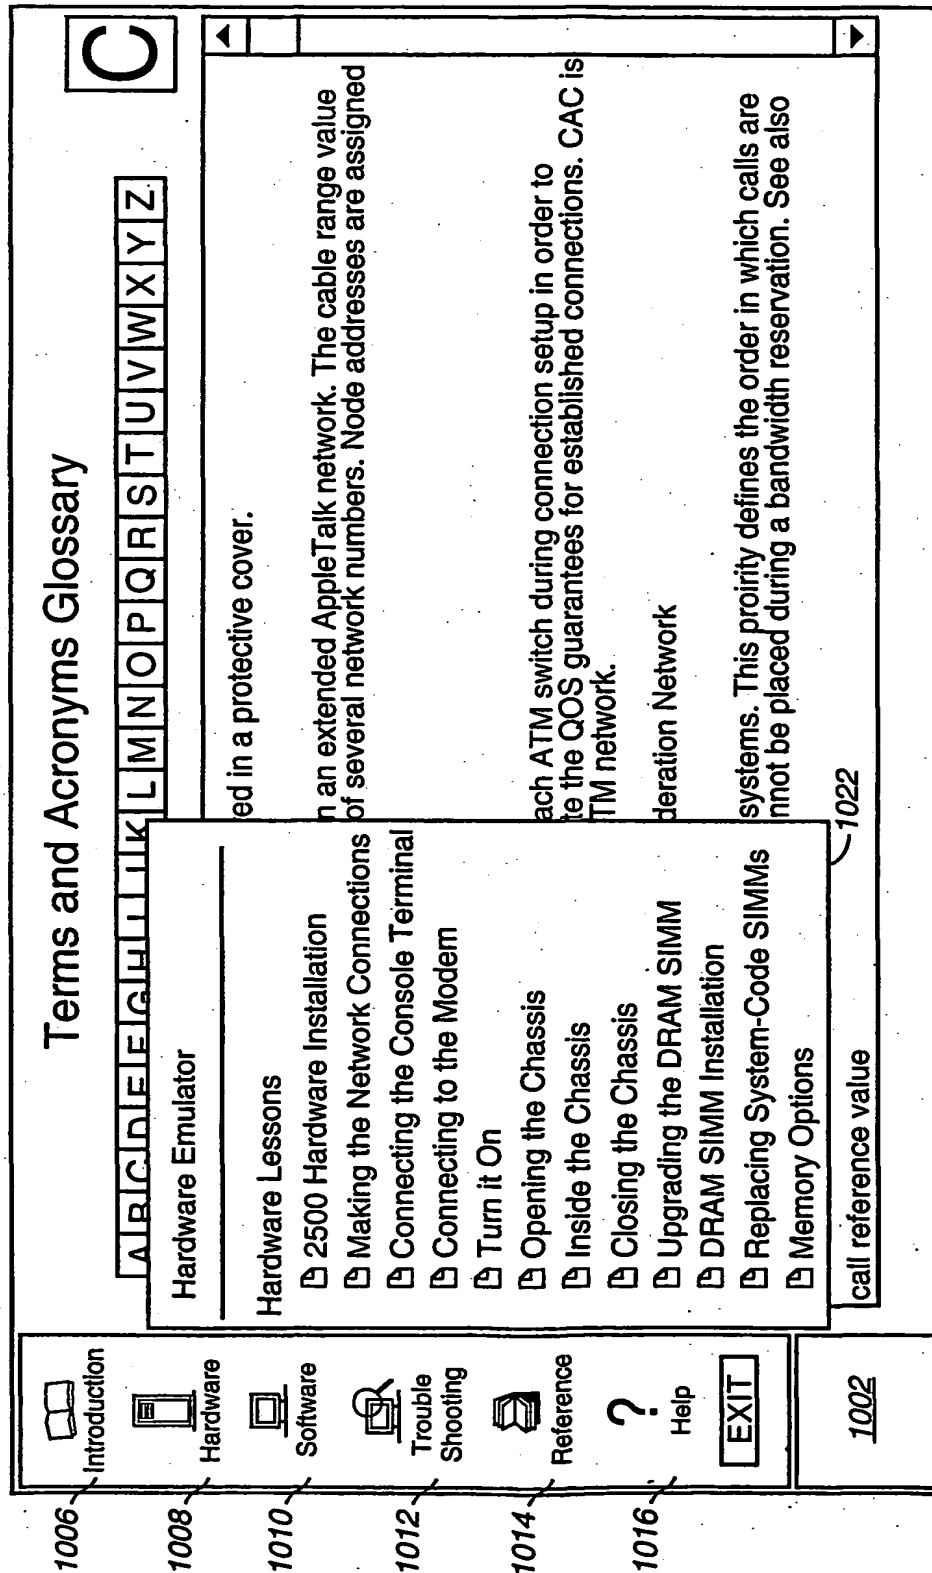


FIG. 10c

13/24

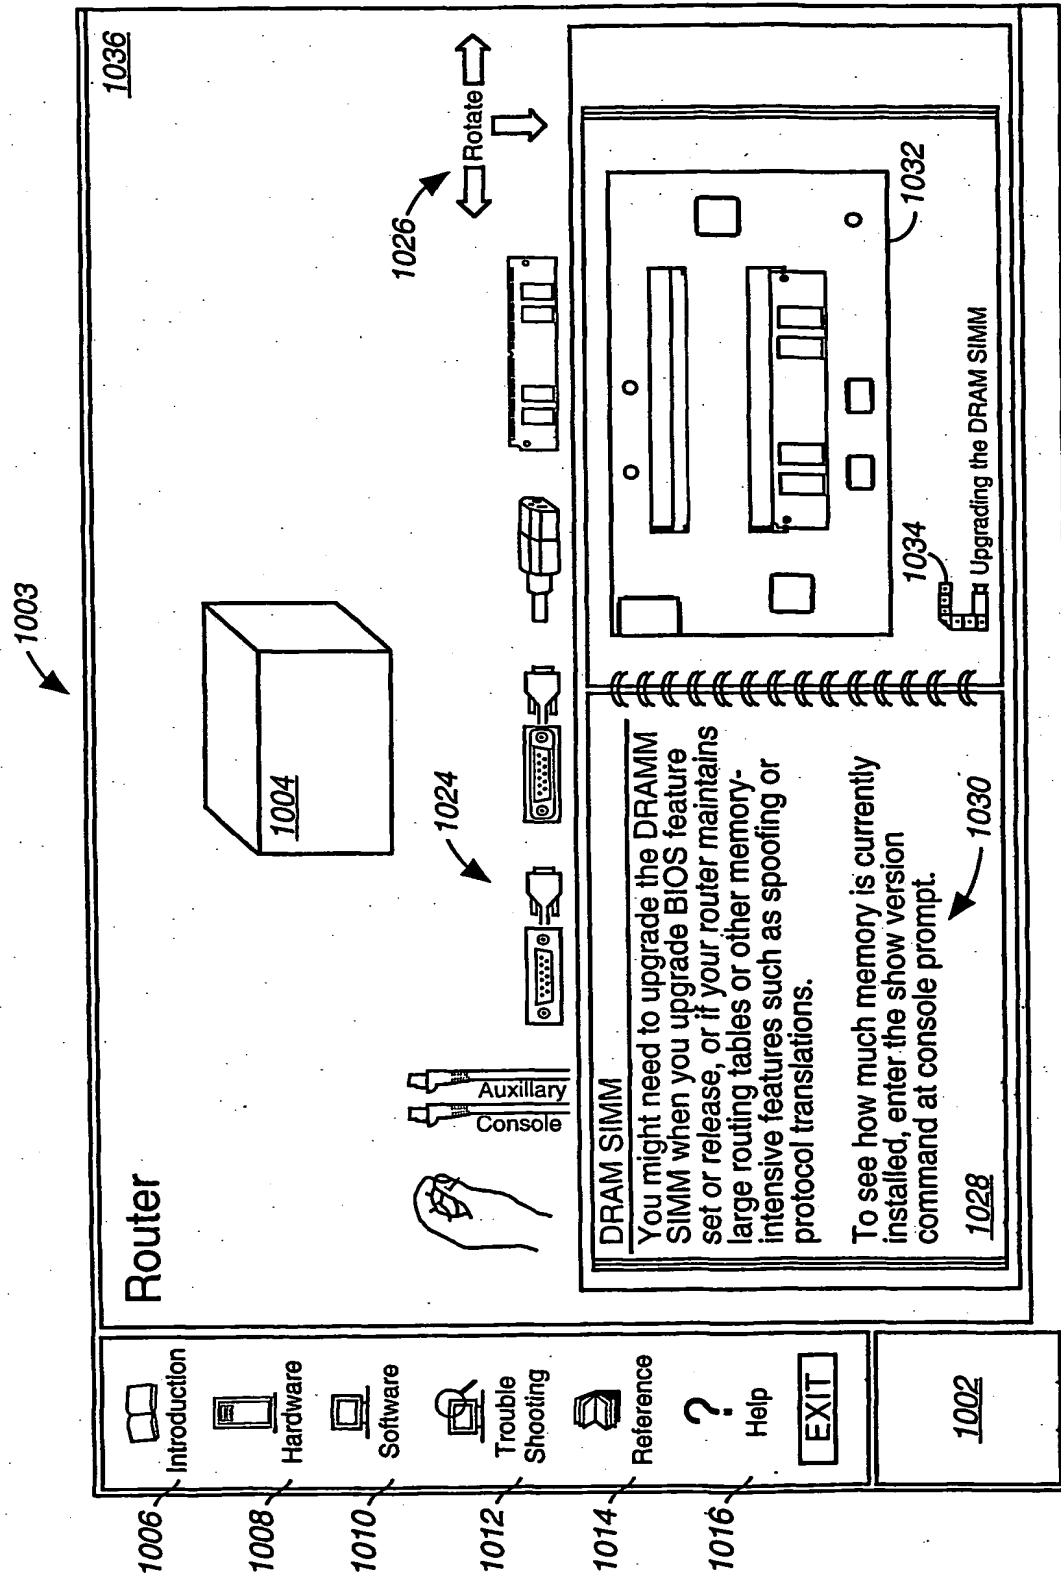


FIG. 10d

1007

1036 Making the Network Connections

Remember: The cables needed to connect a router to a network are not provided with the router.


Ethernet and Token Ring ports are used to connect routers to a Local Area Network (LAN). Synchronous Serial and BRI (ISDN) ports are used to connect routers to a Wide Area Network (WAN).

Making an Ethernet Connection

Make the connection from the Ethernet transceiver to the Ethernet AUI port (DB-15) on the router.

Making an Token Ring Connection

Connect the Token Ring port (DB-9) to an MAU (Media Attachment Unit).

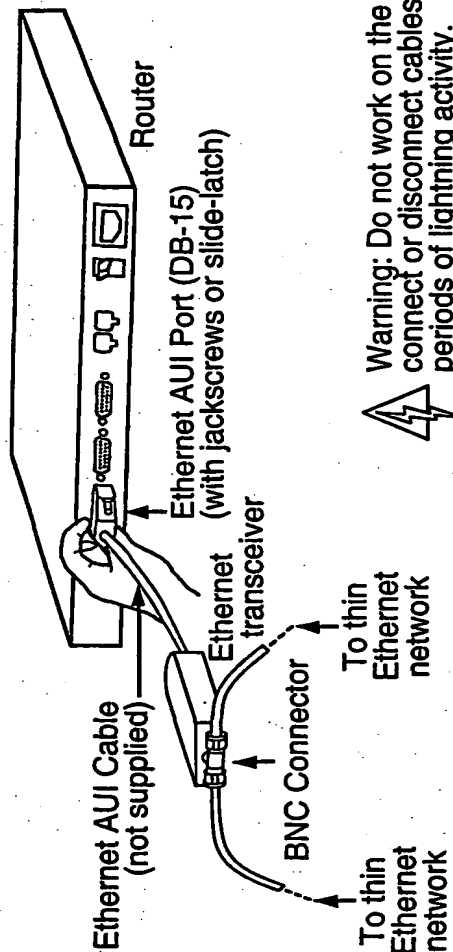

Warning: Do not work on the system or connect or disconnect cables during periods of lightning activity.

(continued on next page)

1006 Introduction

1008 Hardware

1010 Software

1012 Troubleshooting

1014 Reference

1016 ? Help

EXIT

1002

FIG. 10e

15/24

1009

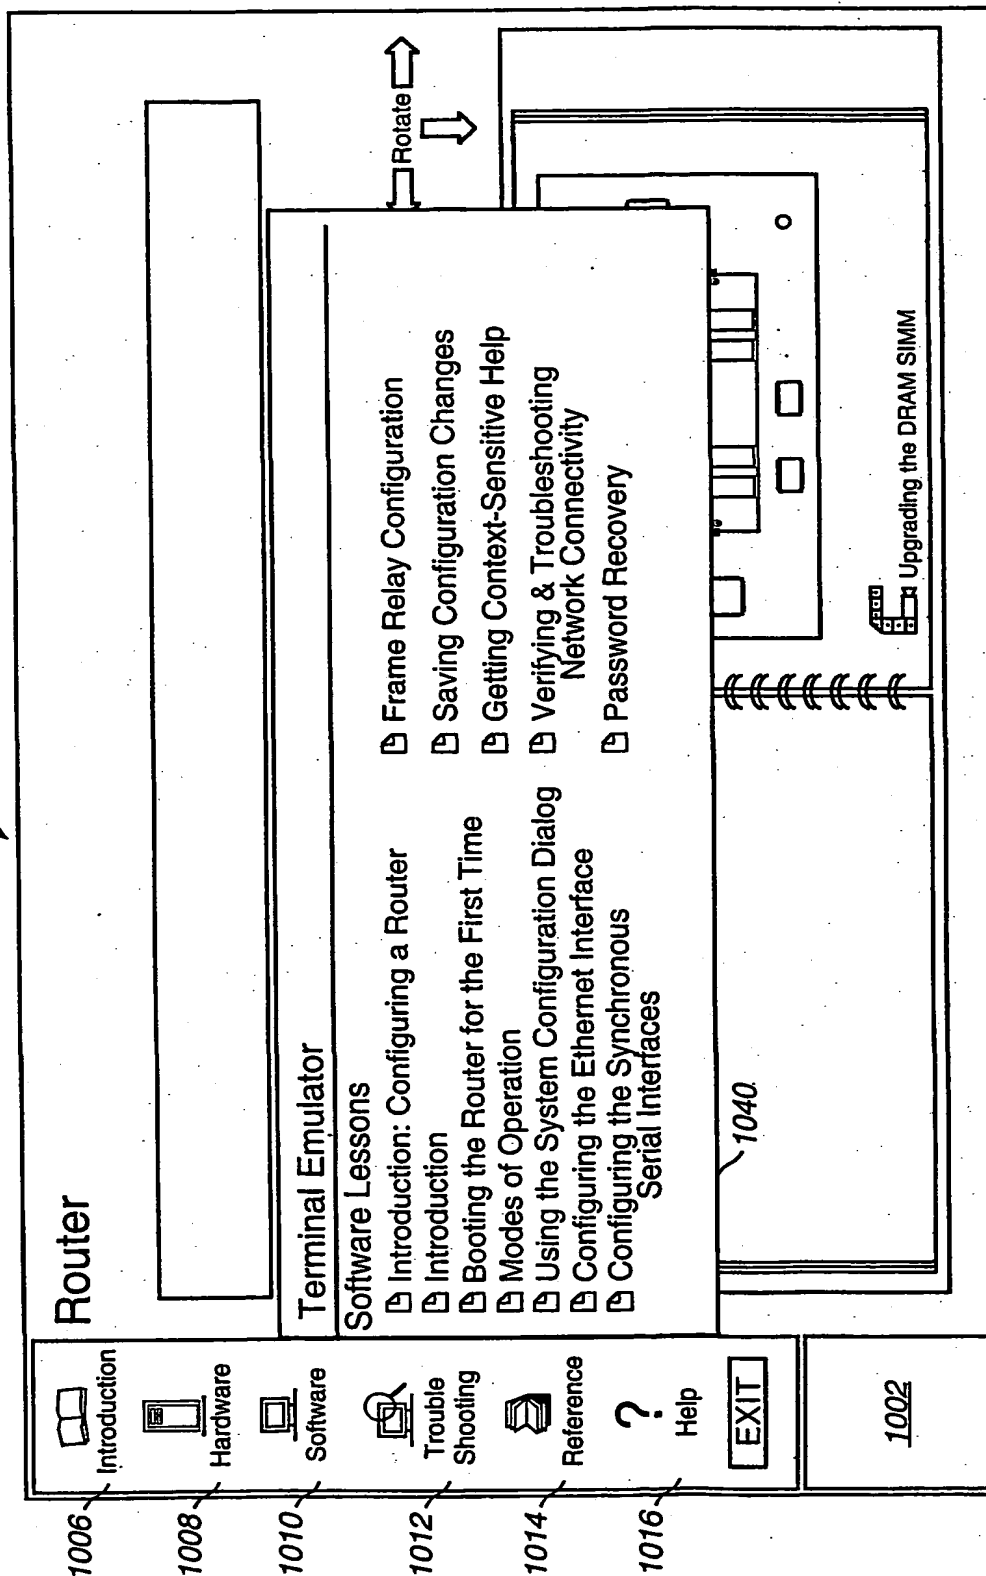


FIG. 10f

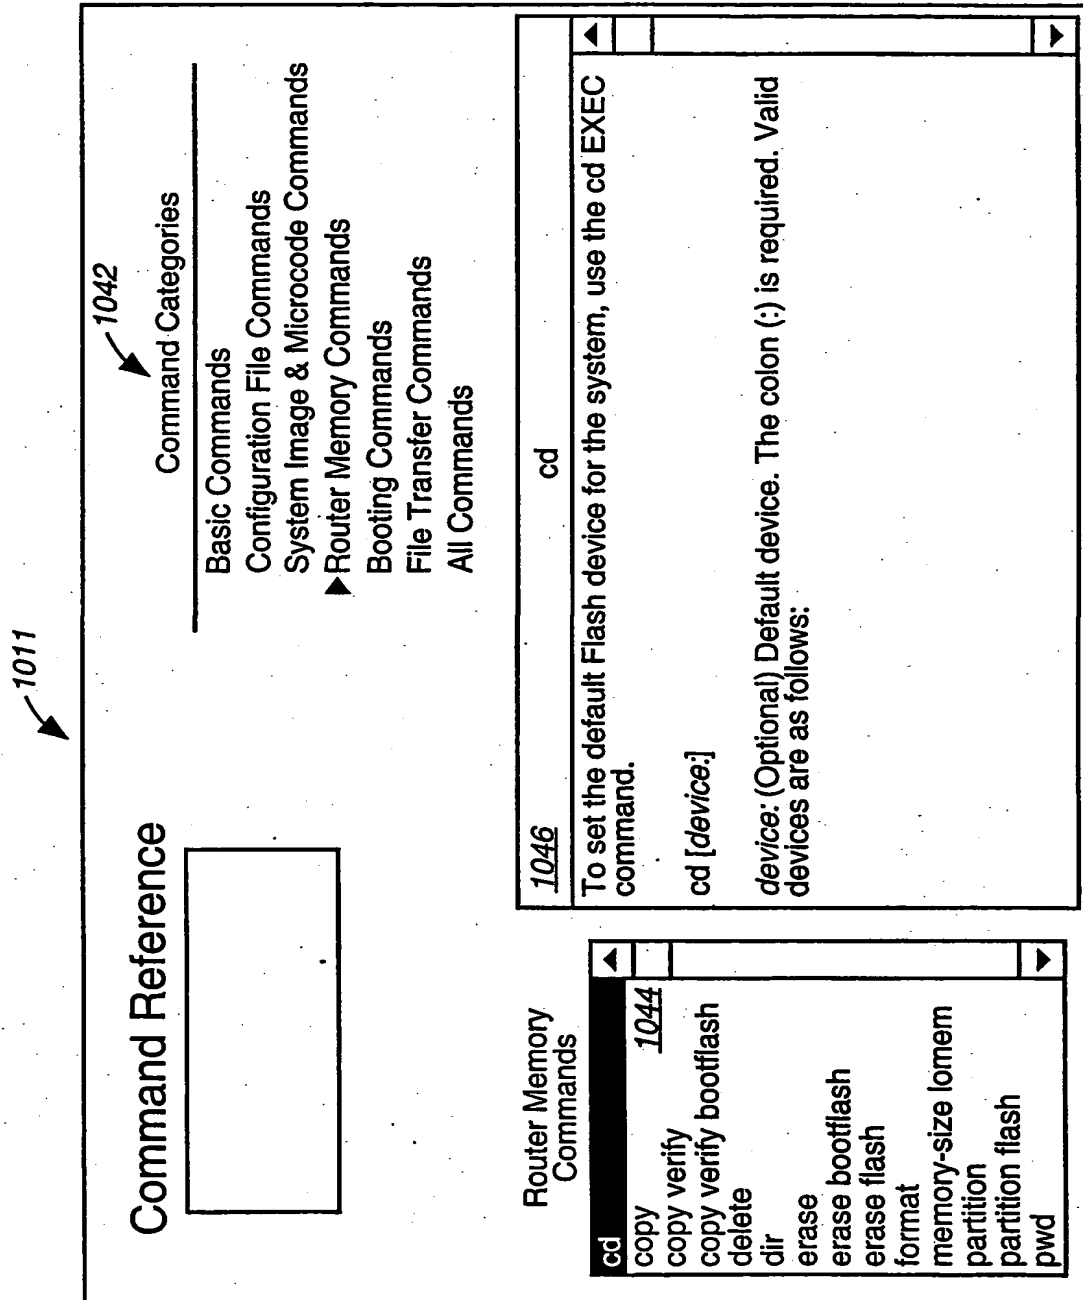


FIG. 10g

17/24

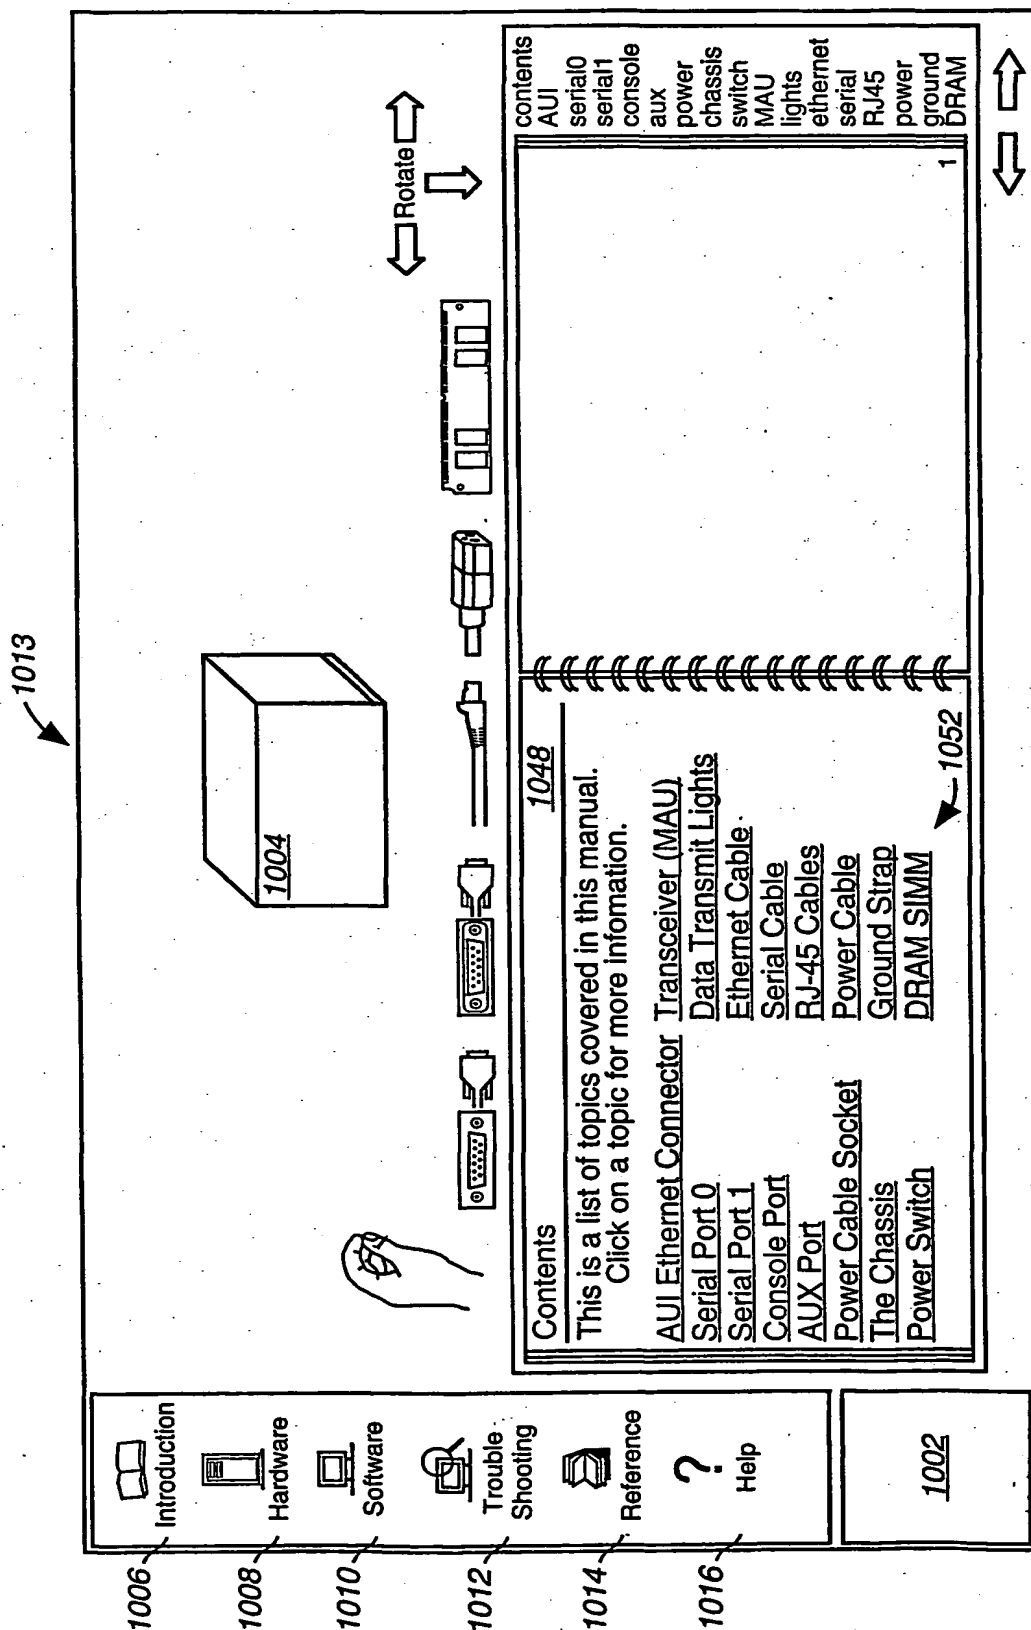


FIG. 10h

18/24

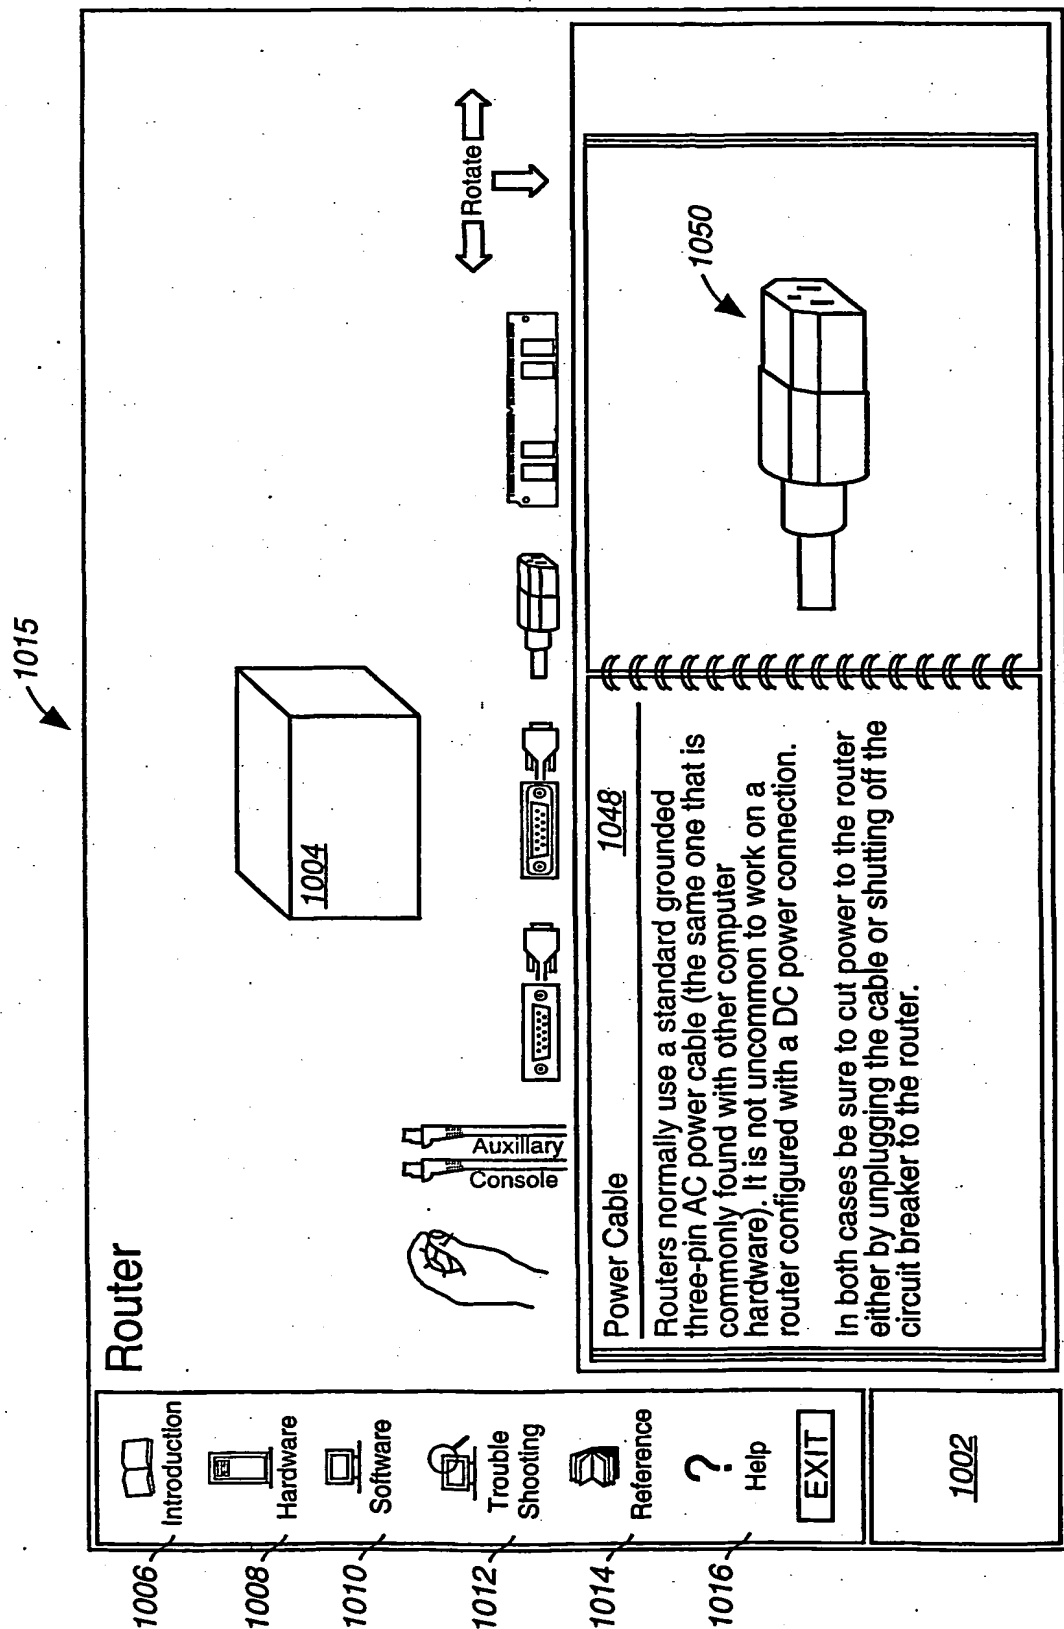


FIG. 10i

19/24

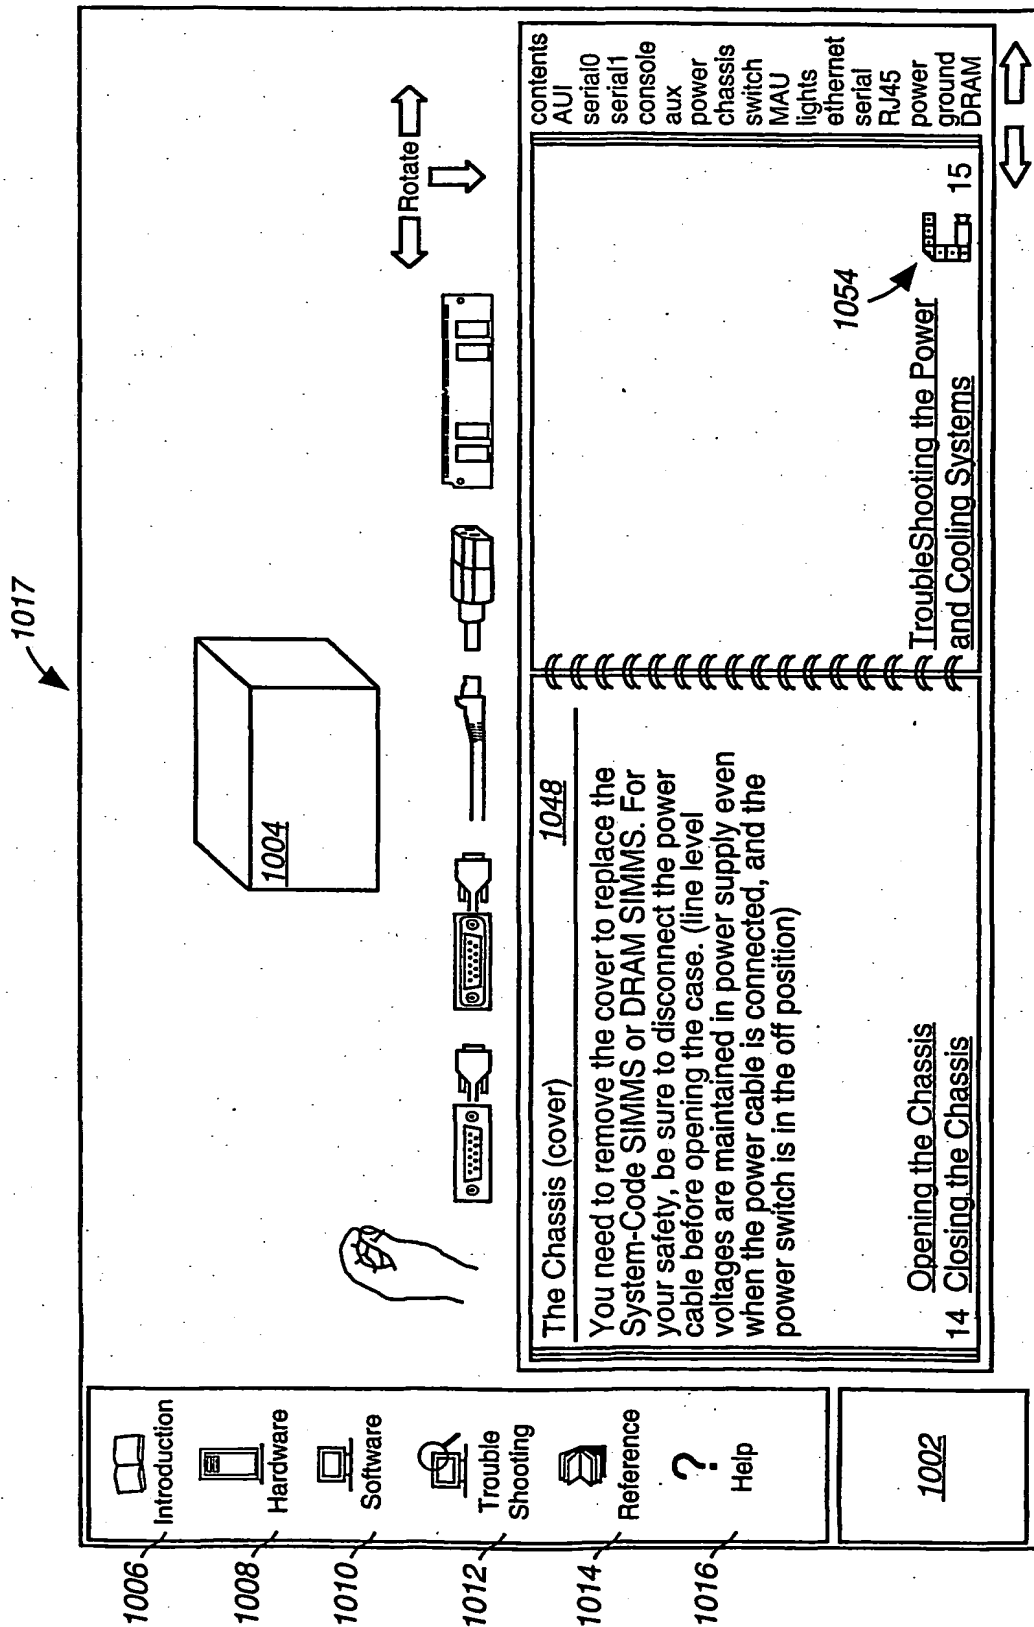


FIG. 10j

20/24

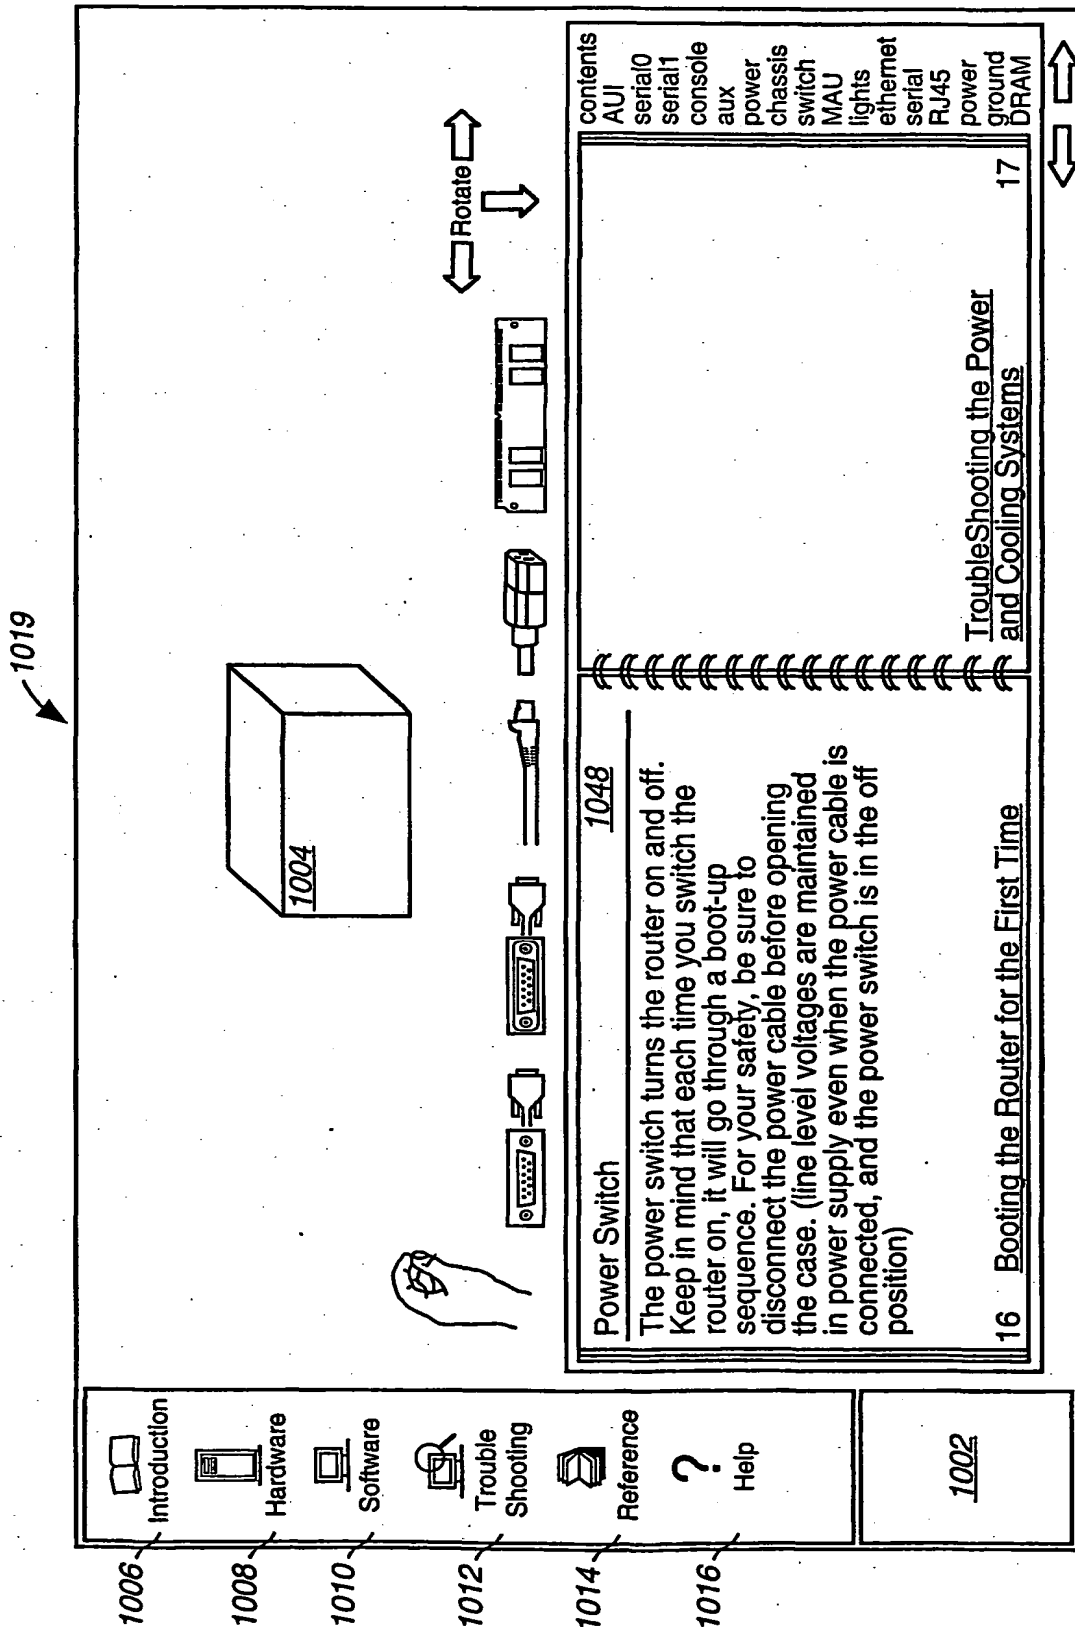


FIG. 10k

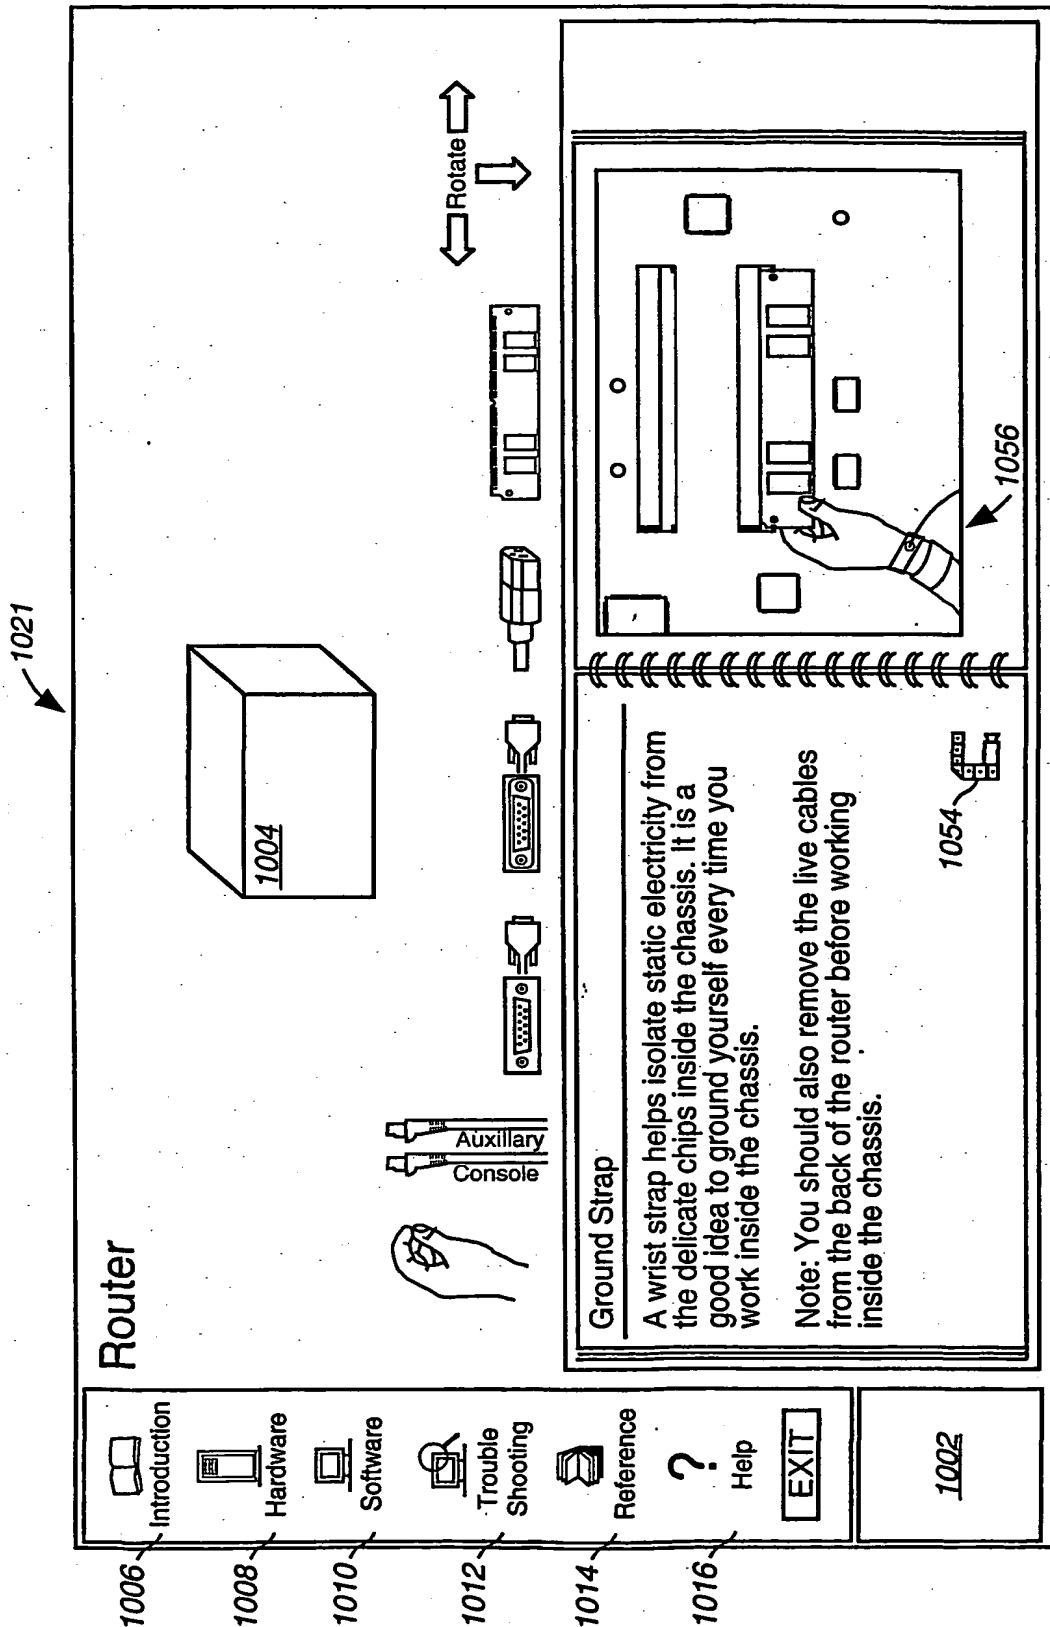


FIG. 10I

22/24

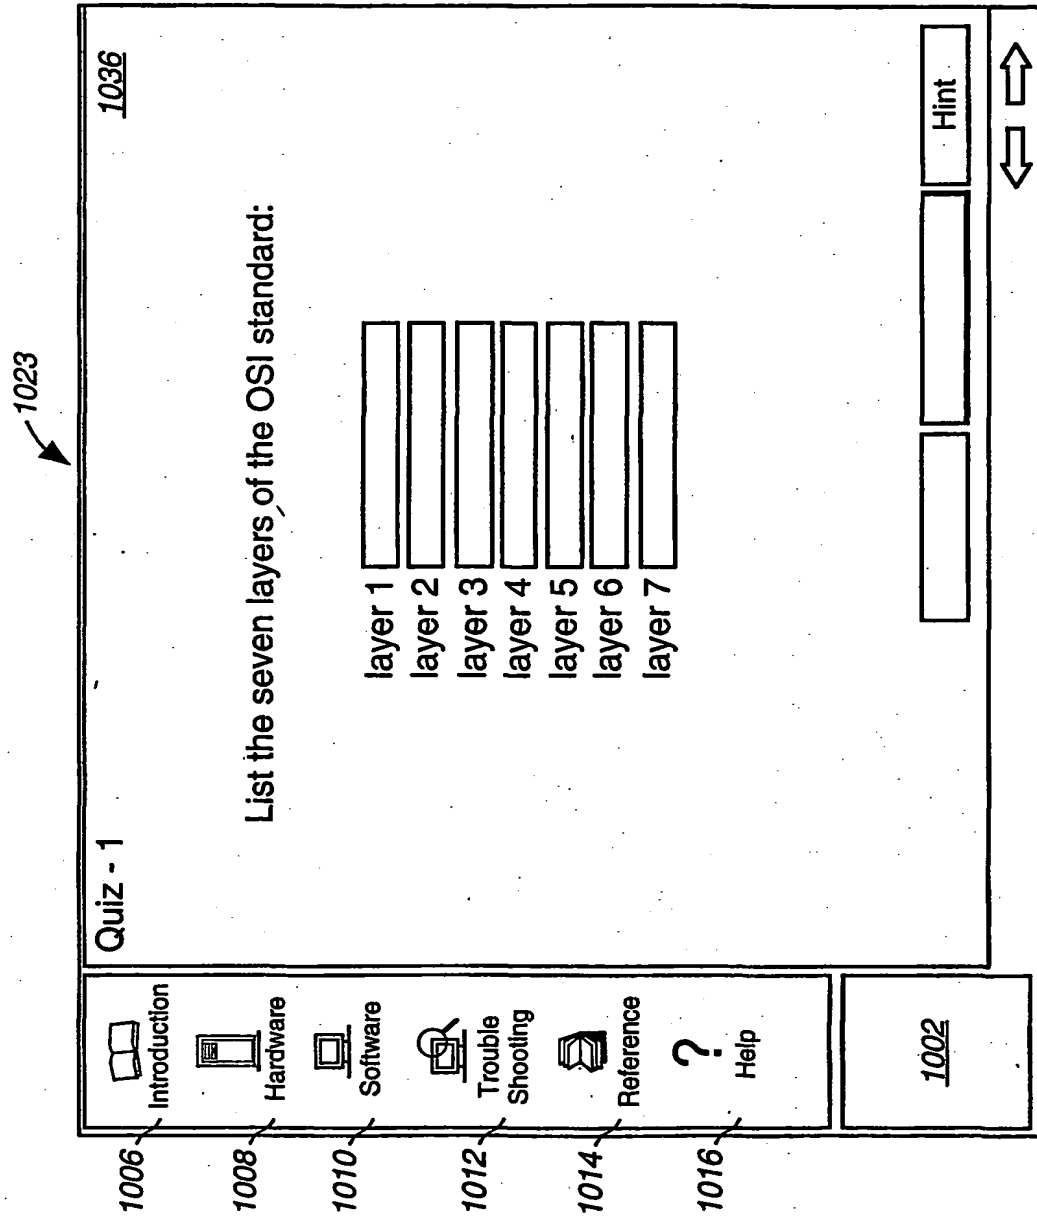


FIG. 10m

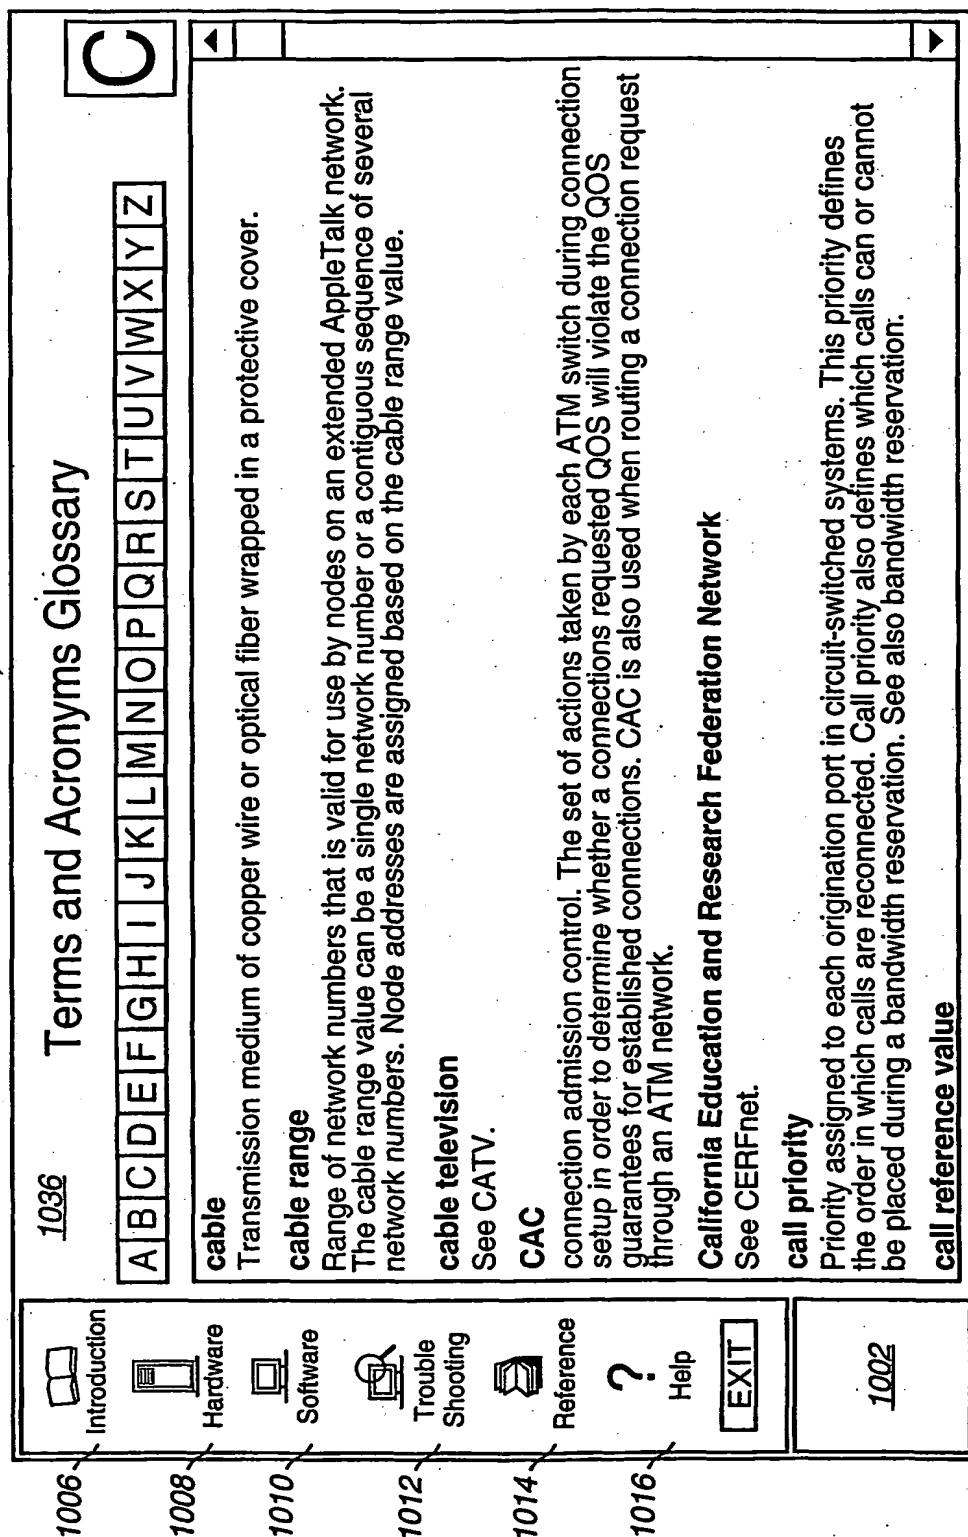


FIG. 10n

24/24

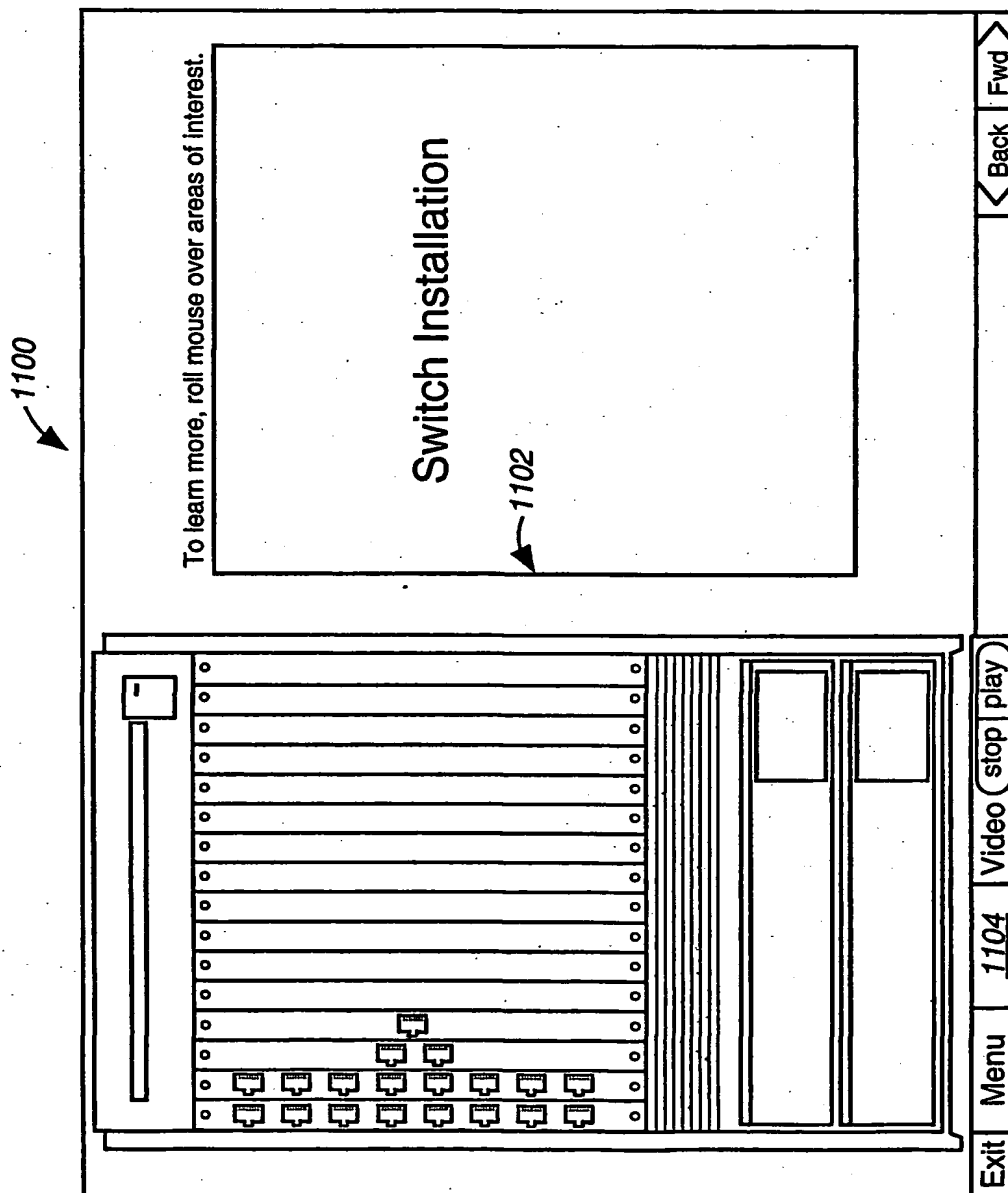


FIG. 11

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.